

KIM-1/6502 USER NOTES

ISSUE #12

THIS IS YOUR LAST ISSUE !!!

RENEWAL TIME IS NOW!!!

Since starting this newsletter several years ago, I've had the chance to communicate with many of you. One thing sort of held true through most of the conversation. Most of you wanted more information more often.

But, since "User Notes" was always a part time activity, it had to play second fiddle to my full time career. As a result, the "Notes" was late a good deal of the time. The situation was unfortunate, but there didn't seem to be a solution.

The past several months I have tried to devise means for expanding "User Notes" so as to provide a better service to you.

I have come to one conclusion. In order to do justice to the general readership, I have decided to make "User Notes" my full time activity. Now I'll be able to spend ALL my time doing a job which needs to be done. I have decided to continue being a bi-monthly publication - at least for a while - but expanding each issue to 24 pages - (double the size of this issue). We're going to continue with First Class mailing (it's faster) and are going to mail each issue in an envelope to eliminate lost pages and frustrated readers.

You'll also notice some big changes between the covers - WE'RE GOING TO SUPPORT VIM & AIM SYSTEMS. (as well as others).

Users of these other "soon-to-be-popular" 6502 based machines will need a place where they can exchange information and our "new" publication can gear up to the task.

With all these changes, it's only fitting that we have a new name to signify our new personality - from now on we'll be called "USER NOTES: 6502".

Our new address is:
USER NOTES: 6502
P.O. Box 33093
N. Koyalton, Oh 44133

The new subscription rates will be:
\$13.00 / 6 double issues - mailed 1st Class to USA & Canada
\$19.00 / 6 double issues - Air Mailed overseas

US FUNDS ONLY
NO PURCHASE ORDERS WITHOUT PAYMENT PLEASE

If you have already resubscribed for Volume 3 at the old price and don't wish to continue your subscription, let us know - we'll cheerfully refund your money. If, on the other hand, you feel as we do that the best is yet to come, kindly remit enough funds to make up the difference.

If you got to PC '78 in Philadelphia your probably still thinking about some of the neat things that were there. There certainly were a number of things to keep you entertained.

Hal Chamberlain, of MTU, was there with a pre-production copy of their new 16K dynamic RAM board. (\$375).

They certainly seem to know the secrets of using dynamic ram up there at MTU.

Many of you have probably heard Hal's digital-to-analog converter board playing the Star Spangled Banner and sounding like a Hammond Organ.

They also showed their prototyping card and a card file which positioned the KIM horizontally above slots for 4 additional cards.

Chamberlain mentioned that since his dynamic memory and video board draws such a small amount of power, he can power two 16K RAM cards and one visable memory board from his \$30 power supply.

Hudson Digital Equipment had two disc-based KIM systems and running to show off their 6502 software and KIM expansion product line.

The most excitement at the HDE booth was the introduction of their KIM MINI-FLOPPY SYSTEM.

For \$695.00, according to HDE, you'll get a Shugart drive, the 4.5"x6" controller board, all necessary cables and the software to drive the thing from your KIM system.

The software is a slightly scaled down version of PODS (file oriented disc system) which is included with their full size disc system. (I've been using this software for about six months and am quite impressed with its capability). A dual drive version of mini-floppy system drive will also be available but no price was mentioned.

They were also excited about their NEC/DIABLO interface hardware and software driver with right print justification.

(It would sure be fine to compose this newsletter on a terminal and then print it on the NEC printer).

HDE also showed a very compact 4.5"x6" card rack, and a prototyping card for their system.

Another KIM-4 bus supporter, RNB Enterprises, (2967 West Fairmount Ave., Phoenix, Az 85017, 602-265-7564), was present with the VIM-1, from Synertek, and a KIM-VIM-AIM compatible motherboard together with RAM, EPROM & EPROM burner cards.

Their motherboard includes an aluminum card cage, can handle up to 8 KIM-4 compatible expansion cards, and sells for \$199.

Also on display at the RNB booth was a 16K static RAM board (\$379) using 2114's, a 2708 EPROM burner board (\$269) and a 2708 EPROM carrier board (\$129) for 2708, 2758, 2716 and 2516 16K's.

I'm really glad to see RNB & HDE supporting the KIM-4. It makes a lot of sense to support a bus which is so easy to design around.

Overall, PC '78 was great fun. Hope you got to see it.

\*\*\*\*\*

HERE'S THE BEST OF THAT EXCELLENT GRAPHICS SERIES STARTED SEVERAL ISSUES AGO BY FLACCO. SCOPE LUNAR LANDER

Not too basic arithmetic routines for calculating altitude, velocity, etc. not to mention the conception and original version of the program. (for the KIM displays) are the work of Jim Butterfield. Without these brilliant methods of programming this would have never fit in 2 pages of memory. I am deeply indebted to JB for many of the ideas which made the graphics drivers possible, and to Eric Rebeck for helping me develop the ideas for the graphics interface.

0200 A9 3F SINIT LDA #3F set peripheral ports  
 0201 00 17 STA F0DD PB=all outputs  
 0202 00 17 STA FED PB=all 1's  
 0203 00 00 GO LDX #ED move 14 bytes  
 0204 00 03 LF1 LDA INIT,X  
 0205 00 04 STA BAH,X  
 0206 00 05 BFL LF1  
 0207 00 05 CAIC LDX #E5  
 0208 00 01 REGAL LDY #81  
 0209 SED  
 0210 CLC  
 0211 LDA ALT,X  
 0212 ADC ALT+2,X  
 0213 STA ALT,X  
 0214 DEX  
 0215 DEY  
 0216 BFL DIGIT  
 0217 LDA ALT+3,X  
 0218 EFL INCR  
 0219 LDA #99  
 0220 INCR ADC ALT,X  
 0221 STA ALT,X  
 0222 LEX  
 0223 BFL RECAL  
 0224 LDA ALT  
 0225 BFL UP  
 0226 LDA #300  
 0227 STA DOWN  
 0228 LDY #2  
 0229 DD STA ALT,X  
 0230 STA ACC,X  
 0231 LEX  
 0232 BFL DD  
 0233 UF SEC  
 0234 LDA FUEL+2  
 0235 SEC THRUST  
 0236 STA FUEL+2  
 0237 LDX #1  
 0238 LF2 LDA FUEL,X  
 0239 SBC #40  
 0240 STA FUEL,X  
 0241 DEX  
 0242 BFL LF2  
 0243 ECS UPDATE  
 0244 NOPUEL LDA #80  
 0245 LDX #3  
 0246 LF3 STA THRUST,X  
 0247 LEX  
 0248 BFL LF3

0200 A9 3F SINIT LDA #3F set peripheral ports  
 0201 00 17 STA F0DD PB=all outputs  
 0202 00 17 STA FED PB=all 1's  
 0203 00 00 GO LDX #ED move 14 bytes  
 0204 00 03 LF1 LDA INIT,X  
 0205 00 04 STA BAH,X  
 0206 00 05 BFL LF1  
 0207 00 05 CAIC LDX #E5  
 0208 00 01 REGAL LDY #81  
 0209 SED  
 0210 CLC  
 0211 LDA ALT,X  
 0212 ADC ALT+2,X  
 0213 STA ALT,X  
 0214 DEX  
 0215 DEY  
 0216 BFL DIGIT  
 0217 LDA ALT+3,X  
 0218 EFL INCR  
 0219 LDA #99  
 0220 INCR ADC ALT,X  
 0221 STA ALT,X  
 0222 LEX  
 0223 BFL RECAL  
 0224 LDA ALT  
 0225 BFL UP  
 0226 LDA #300  
 0227 STA DOWN  
 0228 LDY #2  
 0229 DD STA ALT,X  
 0230 STA ACC,X  
 0231 LEX  
 0232 BFL DD  
 0233 UF SEC  
 0234 LDA FUEL+2  
 0235 SEC THRUST  
 0236 STA FUEL+2  
 0237 LDX #1  
 0238 LF2 LDA FUEL,X  
 0239 SBC #40  
 0240 STA FUEL,X  
 0241 DEX  
 0242 BFL LF2  
 0243 ECS UPDATE  
 0244 NOPUEL LDA #80  
 0245 LDX #3  
 0246 LF3 STA THRUST,X  
 0247 LEX  
 0248 BFL LF3

0200 A9 3F SINIT LDA #3F set peripheral ports  
 0201 00 17 STA F0DD PB=all outputs  
 0202 00 17 STA FED PB=all 1's  
 0203 00 00 GO LDX #ED move 14 bytes  
 0204 00 03 LF1 LDA INIT,X  
 0205 00 04 STA BAH,X  
 0206 00 05 BFL LF1  
 0207 00 05 CAIC LDX #E5  
 0208 00 01 REGAL LDY #81  
 0209 SED  
 0210 CLC  
 0211 LDA ALT,X  
 0212 ADC ALT+2,X  
 0213 STA ALT,X  
 0214 DEX  
 0215 DEY  
 0216 BFL DIGIT  
 0217 LDA ALT+3,X  
 0218 EFL INCR  
 0219 LDA #99  
 0220 INCR ADC ALT,X  
 0221 STA ALT,X  
 0222 LEX  
 0223 BFL RECAL  
 0224 LDA ALT  
 0225 BFL UP  
 0226 LDA #300  
 0227 STA DOWN  
 0228 LDY #2  
 0229 DD STA ALT,X  
 0230 STA ACC,X  
 0231 LEX  
 0232 BFL DD  
 0233 UF SEC  
 0234 LDA FUEL+2  
 0235 SEC THRUST  
 0236 STA FUEL+2  
 0237 LDX #1  
 0238 LF2 LDA FUEL,X  
 0239 SBC #40  
 0240 STA FUEL,X  
 0241 DEX  
 0242 BFL LF2  
 0243 ECS UPDATE  
 0244 NOPUEL LDA #80  
 0245 LDX #3  
 0246 LF3 STA THRUST,X  
 0247 LEX  
 0248 BFL LF3

0200 A9 3F SINIT LDA #3F set peripheral ports  
 0201 00 17 STA F0DD PB=all outputs  
 0202 00 17 STA FED PB=all 1's  
 0203 00 00 GO LDX #ED move 14 bytes  
 0204 00 03 LF1 LDA INIT,X  
 0205 00 04 STA BAH,X  
 0206 00 05 BFL LF1  
 0207 00 05 CAIC LDX #E5  
 0208 00 01 REGAL LDY #81  
 0209 SED  
 0210 CLC  
 0211 LDA ALT,X  
 0212 ADC ALT+2,X  
 0213 STA ALT,X  
 0214 DEX  
 0215 DEY  
 0216 BFL DIGIT  
 0217 LDA ALT+3,X  
 0218 EFL INCR  
 0219 LDA #99  
 0220 INCR ADC ALT,X  
 0221 STA ALT,X  
 0222 LEX  
 0223 BFL RECAL  
 0224 LDA ALT  
 0225 BFL UP  
 0226 LDA #300  
 0227 STA DOWN  
 0228 LDY #2  
 0229 DD STA ALT,X  
 0230 STA ACC,X  
 0231 LEX  
 0232 BFL DD  
 0233 UF SEC  
 0234 LDA FUEL+2  
 0235 SEC THRUST  
 0236 STA FUEL+2  
 0237 LDX #1  
 0238 LF2 LDA FUEL,X  
 0239 SBC #40  
 0240 STA FUEL,X  
 0241 DEX  
 0242 BFL LF2  
 0243 ECS UPDATE  
 0244 NOPUEL LDA #80  
 0245 LDX #3  
 0246 LF3 STA THRUST,X  
 0247 LEX  
 0248 BFL LF3

0200 A9 3F SINIT LDA #3F set peripheral ports  
 0201 00 17 STA F0DD PB=all outputs  
 0202 00 17 STA FED PB=all 1's  
 0203 00 00 GO LDX #ED move 14 bytes  
 0204 00 03 LF1 LDA INIT,X  
 0205 00 04 STA BAH,X  
 0206 00 05 BFL LF1  
 0207 00 05 CAIC LDX #E5  
 0208 00 01 REGAL LDY #81  
 0209 SED  
 0210 CLC  
 0211 LDA ALT,X  
 0212 ADC ALT+2,X  
 0213 STA ALT,X  
 0214 DEX  
 0215 DEY  
 0216 BFL DIGIT  
 0217 LDA ALT+3,X  
 0218 EFL INCR  
 0219 LDA #99  
 0220 INCR ADC ALT,X  
 0221 STA ALT,X  
 0222 LEX  
 0223 BFL RECAL  
 0224 LDA ALT  
 0225 BFL UP  
 0226 LDA #300  
 0227 STA DOWN  
 0228 LDY #2  
 0229 DD STA ALT,X  
 0230 STA ACC,X  
 0231 LEX  
 0232 BFL DD  
 0233 UF SEC  
 0234 LDA FUEL+2  
 0235 SEC THRUST  
 0236 STA FUEL+2  
 0237 LDX #1  
 0238 LF2 LDA FUEL,X  
 0239 SBC #40  
 0240 STA FUEL,X  
 0241 DEX  
 0242 BFL LF2  
 0243 ECS UPDATE  
 0244 NOPUEL LDA #80  
 0245 LDX #3  
 0246 LF3 STA THRUST,X  
 0247 LEX  
 0248 BFL LF3

0200 A9 3F SINIT LDA #3F set peripheral ports  
 0201 00 17 STA F0DD PB=all outputs  
 0202 00 17 STA FED PB=all 1's  
 0203 00 00 GO LDX #ED move 14 bytes  
 0204 00 03 LF1 LDA INIT,X  
 0205 00 04 STA BAH,X  
 0206 00 05 BFL LF1  
 0207 00 05 CAIC LDX #E5  
 0208 00 01 REGAL LDY #81  
 0209 SED  
 0210 CLC  
 0211 LDA ALT,X  
 0212 ADC ALT+2,X  
 0213 STA ALT,X  
 0214 DEX  
 0215 DEY  
 0216 BFL DIGIT  
 0217 LDA ALT+3,X  
 0218 EFL INCR  
 0219 LDA #99  
 0220 INCR ADC ALT,X  
 0221 STA ALT,X  
 0222 LEX  
 0223 BFL RECAL  
 0224 LDA ALT  
 0225 BFL UP  
 0226 LDA #300  
 0227 STA DOWN  
 0228 LDY #2  
 0229 DD STA ALT,X  
 0230 STA ACC,X  
 0231 LEX  
 0232 BFL DD  
 0233 UF SEC  
 0234 LDA FUEL+2  
 0235 SEC THRUST  
 0236 STA FUEL+2  
 0237 LDX #1  
 0238 LF2 LDA FUEL,X  
 0239 SBC #40  
 0240 STA FUEL,X  
 0241 DEX  
 0242 BFL LF2  
 0243 ECS UPDATE  
 0244 NOPUEL LDA #80  
 0245 LDX #3  
 0246 LF3 STA THRUST,X  
 0247 LEX  
 0248 BFL LF3

0200 A9 3F SINIT LDA #3F set peripheral ports  
 0201 00 17 STA F0DD PB=all outputs  
 0202 00 17 STA FED PB=all 1's  
 0203 00 00 GO LDX #ED move 14 bytes  
 0204 00 03 LF1 LDA INIT,X  
 0205 00 04 STA BAH,X  
 0206 00 05 BFL LF1  
 0207 00 05 CAIC LDX #E5  
 0208 00 01 REGAL LDY #81  
 0209 SED  
 0210 CLC  
 0211 LDA ALT,X  
 0212 ADC ALT+2,X  
 0213 STA ALT,X  
 0214 DEX  
 0215 DEY  
 0216 BFL DIGIT  
 0217 LDA ALT+3,X  
 0218 EFL INCR  
 0219 LDA #99  
 0220 INCR ADC ALT,X  
 0221 STA ALT,X  
 0222 LEX  
 0223 BFL RECAL  
 0224 LDA ALT  
 0225 BFL UP  
 0226 LDA #300  
 0227 STA DOWN  
 0228 LDY #2  
 0229 DD STA ALT,X  
 0230 STA ACC,X  
 0231 LEX  
 0232 BFL DD  
 0233 UF SEC  
 0234 LDA FUEL+2  
 0235 SEC THRUST  
 0236 STA FUEL+2  
 0237 LDX #1  
 0238 LF2 LDA FUEL,X  
 0239 SBC #40  
 0240 STA FUEL,X  
 0241 DEX  
 0242 BFL LF2  
 0243 ECS UPDATE  
 0244 NOPUEL LDA #80  
 0245 LDX #3  
 0246 LF3 STA THRUST,X  
 0247 LEX  
 0248 BFL LF3

0250 UPDATE ILA THRUST  
 SEQ THRSET  
 LDA #500  
 STA FADD  
 LDA #3B  
 STA FED  
 LDA FAD  
 LSR/LSR A  
 LSR/LSR A  
 C9 09  
 CAF #9  
 HAI OK  
 LDA #8  
 OK TAX  
 INX  
 STA THRUST  
 LDA THRUST  
 SEC #5  
 STA ACC+1  
 LDA #80  
 SEC #50  
 STA ACC  
 OK TAX

0278 OK TAX  
 E8  
 E8  
 E8 DD  
 A5 DD  
 38  
 E9 05  
 E5 DC  
 A9 00  
 E9 00  
 E5 DB  
 0278 AA  
 E8  
 E8  
 E8 DD  
 A5 DD  
 38  
 E9 05  
 E5 DC  
 A9 00  
 E9 00  
 E5 DB

0289 BALTCOM OLD  
 LDA ALT  
 AND #F  
 STA BALT  
 LDA ALT  
 LSR/LSR A  
 LSR/LSR A  
 BEQ DEL  
 TAX  
 CLC  
 LDA #A  
 ADC BALT  
 STA BALT  
 LEX  
 E8 E1  
 02A3 DEL ASL BALT  
 LDA ALT+1  
 C9 50  
 30 02  
 E8 E2  
 02AD DISFLAY LDA #3F  
 FD 02 17  
 A9 FF  
 0D 01 17  
 A9 0D  
 F5 D3  
 A9 14  
 E5 E3  
 A0 19  
 20 57 03  
 A5 D0  
 F0 17  
 A5 E1  
 F0 13  
 A9 E7  
 65 D3  
 7E  
 A9 1D  
 E5 DD  
 F5 E3  
 A5 DD  
 0A  
 A8  
 E8  
 20 57 03

029A BLI LDA #A  
 ADC BALT  
 STA BALT  
 LEX  
 E8 E1  
 02A3 DEL ASL BALT  
 LDA ALT+1  
 C9 50  
 30 02  
 E8 E2  
 02AD DISFLAY LDA #3F  
 FD 02 17  
 A9 FF  
 0D 01 17  
 A9 0D  
 F5 D3  
 A9 14  
 E5 E3  
 A0 19  
 20 57 03  
 A5 D0  
 F0 17  
 A5 E1  
 F0 13  
 A9 E7  
 65 D3  
 7E  
 A9 1D  
 E5 DD  
 F5 E3  
 A5 DD  
 0A  
 A8  
 E8  
 20 57 03

02B7 DISBLRD LDA BIRDREAL  
 STA EAL  
 LDA #14  
 STA RELOS  
 LDA #19  
 JSR DISPIC  
 LDA THRUST  
 EQ DISPAD  
 LDA DGN  
 EQ DISPAD  
 LDA FIFAL  
 STA BAL  
 SEC  
 LDA #14  
 SEC THRUST  
 STA RELOS  
 LDA THRUST  
 ASL A  
 TAY  
 DEY  
 JSR DISPIC

02C4 FLAMEON LDA THRUST  
 EQ DISPAD  
 LDA DGN  
 EQ DISPAD  
 LDA FIFAL  
 STA BAL  
 SEC  
 LDA #14  
 SEC THRUST  
 STA RELOS  
 LDA THRUST  
 ASL A  
 TAY  
 DEY  
 JSR DISPIC

02CC DISFLAY LDA FIFAL  
 STA BAL  
 SEC  
 LDA #14  
 SEC THRUST  
 STA RELOS  
 LDA THRUST  
 ASL A  
 TAY  
 DEY  
 JSR DISPIC

02D0 update thrust from joy  
 if thrust=0 motor must  
 so don't update  
 FA=all inputs  
 enable Y latch  
 read one axis of joystick  
 set LSD in LSD position

convert ALT to hex for BALT  
 (bird altitude)  
 ALT=10000?  
 Yes, do multiple addition  
 decimal 10  
 FAIT=BALT X2  
 BALT= (ALTITUDE/50) hex  
 draw the pictures  
 disable the joystick  
 FA= all outputs  
 draw the base address  
 vertical position.  
 number of points in bird  
 print it!  
 do we have ignition?  
 not if thrust is zero  
 are we still in the air?  
 not if BOK is zero  
 draw the flame  
 set the base address  
 vertical offset  
 ALLOS= 10-thrust this keeps  
 the flame next to the bird  
 how big should the flame be?  
 Y= 2(thrust) -1 number of points  
 print it!

0205	A2 10	LISPAD LDX #810	landing pad width...	CIC	horizontal centering
0206	A2 1A	DP LDI #51A	and elevation	ADC #040	this is the X-coord to show
	8C 00 17	STY FAD	draw a line a point at a time	INC PBD	latch it in
	CE 02 17	DEC PED		DEY	done all the points yet?
	8A	TXA		RTS	display one digit as 7 segments
	10	CIC	horizontal centering		fet the KIN segment code
	69 3D	ADC #03D	done the pad yet?		do seven segments
	8D 00 17	STA PAD	transfer the vital statistics		do we do this segment?
	E2 02 17	INC PED	for display as digits		not if bit 7 = 0
	10 EF	RPL DP	show velocity as absolute value		find out where the 5 dots for
0207	A5 D5	MOVEA LLA ALT			each segment start
	85 E5	STA VIT+3			first in the vertical
	A5 D0	LDA ALT+1			then the horizontal
	85 EA	STA VIT+2			this is where the digit is
0208	A5 D9	MOVEV IIA VEL+1			in the row of digits
	A0 D0	ILX VEL			do 5 dots per segment
	10 00	RFL MOVV			latch the Y-coord.
	AD 00	SEC/SED			latch the X-coord.
	85 D9	LDA #00			is it to be up-and-down...
	85 EC	SEC VEL+1			...or side-to-side?
0209	A5 E0	MOVV STA VIT+4			unconditional branch
	85 E9	MOVEF IIA FUEL			done 5 dots?
	A5 DF	STA VIT+1			done 7 segments?
	85 E8	LDA FUEL+1			advance to the next digit place
	D0	STA VIT+0			
0210	A2 04	CID			
	A9 00	LISNUM LDX #04	display 5 locations		
	85 E6	STA HOFST	horizontal offset		
	A0 00	LDY #00	spacing flag; xx xxxx xxxx		
0211	E5 E8	UNI LDA VIT,X	fet a byte		
	4A 4A	ISR/ISR A	fet the LSD		
	4A 4A	ISR/ISR A	convert to segments and shine		
	00 79 03	JSR CONVSEC	fet the same byte		
	05 E8	LDA VIT,X	this time the LSD		
	29 00	AND #0F	another digit lit		
	20 79 03	JSR CONVSEC			
	CA	DEX			
	00 7E	EMI OUT			
	00	DEY			
	10 EA	RPL DR1			
	A5 E6	LDA HOFST	advance the horizontal offset		
	85 E4	ADC #114	to space out between values		
	85 EC	STA HOFST			
	A7 01	LDY #01	unconditional branch		
	D0 DF	BNE DR1			
0212	A5 E1	OUT LDA DCIN			
	D0 03	BIE CALJMP			
	4C AF 02	JNF DISPLAY			
0213	4C 12 02	CALJMP JAP CALC			
0214	07 45 01	INIT .BYTE 3,45,1,0,99,01,0,99,97,2,8,0,0,1			
	00 99 01				
	00 99 97				
	02 00 00				
	00 01				
0215	E1 D3	DISFIG LDA (EAL),Y	fet the coordinates		
	4A 4A	ISR/ISR A	extract the Y-coord		
	4A 4A	ISR/ISR A			
	10	CIC			
	65 E2	ADC EALT	add the bird's altitude (hex)		
	65 E3	ADC RELOS	add the vertical offset		
	ED 00 17	STA PAD	this is the Y-coord to show		
	CE 02 17	DEC PED	latch it in		
	E1 D3	LDA (EAL),Y	fet the same coordinates		
	00 00	AND #0F	this time set Y-coord		

\*\*\*\*\*

BIRDBAL = 03DC  
 FLMBAL = 03E7  
 SECTBL = 03F9

F4 F5 F6  
 E3 E7 D2 D8 C1 C9 B1 B9  
 03D8 A1 A2 A8 A9 90 91 94 95  
 03E0 96 97 9A 80 8A 70 7A 05  
 03E8 05 15 15 25 25 34 36 44  
 03F0 46 54 56 64 66 73 77 83  
 03F8 87 DC 6B 65 D0 05 0B D6



# TWT6

Phillip K. Hooper Box 293, Johnson, VT 05656

## SOME CHEAP? EASY, and HELPFUL TWT-6 HARDWARE MODIFICATIONS

- Replace resistor R9 with a 5 Megohm pot. This permits varying the cursor 'blink rate' from a slow cycle of several seconds per blink up to a rate fast enough so that the cursor appears to be on continuously.
- From the junction of R19 and D5 (see diagram), connect:
  - one diode to the jumper parallel to R19 (connects to pin 15 on the 2513)
  - one diode to the long jumper running beneath the 2513 (connects to pin 16 of 2513)
  - one 1K resistor
  - connect the other end of this 1K resistor to:
    - pins 11 and 12 of the 74165 shift register (remove chip, bend pins up, replace chip, or carefully solder to unlifted pins)
    - a parallel combination of a 3K resistor and a .01 capacitor going to ground (the jumper immediately 'beneath' the 74165 is a convenient ground line)

This modification changes the cursor from a glob which overwhelms the character it hits, into an UNDERLINE which extends two dots to the right of the indicated character and, hence, remains discernible even when used with the character 'E'. It may also be used to draw a solid horizontal line.

1x44, double-size character TWT-6 driver subroutine, Screen-centered.

```

1750 8B517  insert SCRAM address
1751 28149C  character line scan
1752 6484  increase 'half-a-row'
1753 9409  " "
1754 92F4  (1750) " "
1755 2A  set 100 to 65
1756 4211  blank row count to X
1757 6413  increase frame count by 1 (carry 15 set)
1758 5015  (1755) DONE?
1759 271534  first blank
1760 E8  of blank
1761 1814  (1753) scans
1762 7F40  V-synch
1763 8513  attach frame count
1764 2214  reset SCRAM address, row counter (bits 3-5)
1765 2214  second block
1766 E8  of blank
1767 D113  (1715) scans
1768 E814  (1753) do another frame
1769 2214  reset frame counter
1770 A60  pot out
1771 17B
    
```

For single-height characters:  
 [1787] = 08 [178E] = 09  
 (8 more blank scans to fill in for the 8 'lost' active scan lines)

For a 'lock-in' routine, without subroutine return, merely change the byte 1791 to 84, putting more erasge in 'wastebasket Y'. In addition, 179C may be changed to 84 to suppress occasional 'flashes'.

The blank lines are scanned in two separate blocks around the V-synch pulse to put the actively scanned line in the center of the screen instead of at the bottom.

The Program is entered with the timing parameter in the accumulator, followed by a JSR to 178D.  
 e.g. A9C0 208D17


Since the frame counter is incremented, low values of the timing parameter produced the longest residue times, while a large value (like FO) meant only a short stay (16 frames, about 1/4 second) in the routine.

```

1780 804517
1781 28149C 6904
1782 C9C0 94F4
1783 8A 4211
1784 6513 1815
1785 280E17 E8
1786 148A 234C0
1787 271534
1788 271534 E8
1789 271534 F0D8
1790 25F117
    
```

- Connect a 1.2K ohm resistor to the (otherwise-unused) edge finger VD6. From the other side of this resistor, run:
  - a wire to pin 6 of the 74165 (hope you lifted it already for cursor modification)
  - two diodes, which go to the same two jumpers as did the new cursor diodes.

This modification results in a small 'lump' appearing at the lower left corner of any character having bit 6 HI. (the lump is 1 dot wide by 2 dots high). In this way we gain a sort of pseudo-subscript and, along with the cursor modification, are able to distinguish between 256 different characters - that is, we can now determine the complete bit pattern of a byte from its image on the screen.

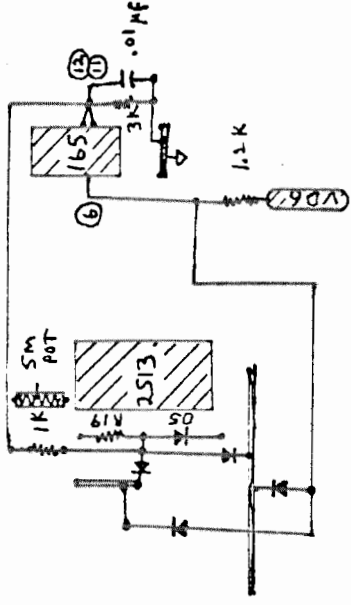

- Components Required:
- 4 small signal diodes
  - 3 1/4 W resistors
  - 1K, 1.2K, 3K
  - 1 0.01 mfd capacitor
  - 1 5 Megohm potentiometer
- (These values were arrived at by 'cut and try' and, although they work for my rig, they can most likely be improved upon by someone with hardware expertise. I would appreciate hearing from anyone who knows what the values 'should be'.)

## KIM OWNERS

Use your basic KIM board as a development system for the MIK controller board from Qix Systems. Develop and check out programs on your KIM. Then, load a PROM with your program and insert into MIK controller board. You then have a non-volatile programmed controller with following features:

- 16 Programmable I/O pins
- 512 or 1024 bytes of ROM and 128 bytes of RAM for scratchpad and processor stack
- On board clock, programmable timer interrupts, +5V voltage regulator, debounce circuitry for nonmaskable interrupt and reset lines
- Open collector output buffers for driving LED's, relays, SCR's, etc.
- Low insertion force socket for PROM's
- Uses single unregulated supply with PROM's or an additional -5V supply with 2704 or 2708 EPROM's
- Professionally manufactured two sided PC board with plated through holes and gold tips for 44 pin edge connector
- 4 1/2" by 6 1/2" by 1/2"
- \$109.95 assembled and tested (no PROM's included)

Qix Systems (214) 387-5569  
 P.O. Box 401626  
 Dallas, Texas 75240



6


The enclosed one possible configuration of expansion decoding. It is specifically for TVT6 in mind (TVT6 from Popular Electronics). KIM will operate normally as with the TVT6.

IC1 pins to addresses 7000-7FFF. Each port or section is one page wide. Currently, I am using each section for an IN/OUT port.

IC2 output attaches to IC2, pin 5 of the TVT6. This will disable normal KIM operation when low. IC2, pin 5 (TVT6) will float high when 7000-7FFF is not selected. The two high enable CS1 and CS2 on the 6520's go to five volts and the outputs of the 74154 go to the active low chip select (CS3) of the 6520's. Note that the data in the pin of the 74154 goes to ground. It could just as easily be tied high for an active high signal out.

The decoding is not down to every single address but still allows for 20k of expansion between 2000-0FFF. Achieving low parts count and later decoding freedom was the purpose of this design. This circuit plus data buffers and two 6520's will fit on one Radio Shack 4 1/2 X 4 PCB board.

I am considering a second processor to drive the TVT6 transparently to free KIM for normal use (an intelligent terminal?). I would like to hear from others thinking along similar lines.

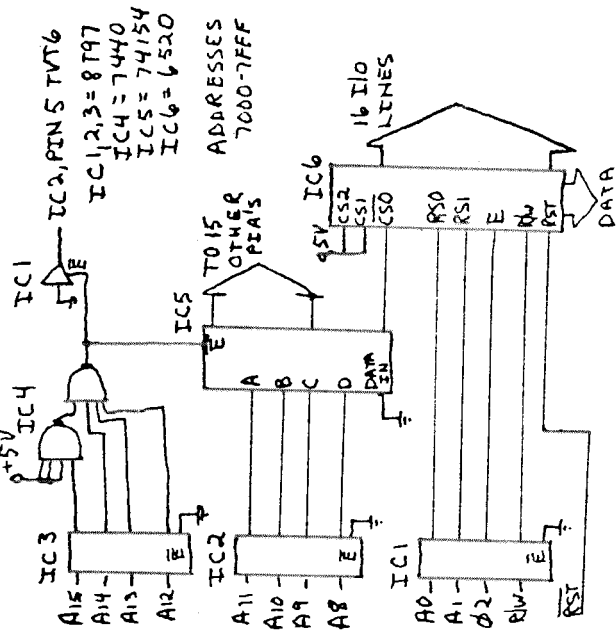

D. Clem  
RR #2,  
Spencerville, Ohio 45887

**TVT-6 Remarks by Cass and Dan Lewalt 12 Georgian dr., Holmdel, NJ 07733**

This ingenious and simple KIM/TV Interface was described by Don Lancaster in Popular Electronics (July/August 1977) and in K1lobaud (Dec. 77/Jan. 78). The complete kit (without the 36-pin connector) is being sold by PAIA Electronics, Box 14359, Oklahoma City, OK 73114 for \$34.95. Here are some observations based on our experiences building and experimenting with it. If you have any hardware questions write to Cass, and send software questions to Dan.


1. The kit is easy to build (2 hours) but connections to KIM require a neat soldering job (4 hours).
2. All connections between the TVT and KIM are between the TVT socket, the KIM expansion connector and the KIM board. You can avoid making any connections to the KIM Application connector by breaking the foil to the A-K pin.
3. If you decide to convert your TV set into a monitor use the base of the first video amplifier as your input and increase the emitter resistor of this stage until the ASCII characters are steady and not leaning.
4. If the right sides of all ASCII characters are missing, lower the value of C5 to 68 pF and replace R11 with a 500 ohm potentiometer.
5. The following refers to the 16 x 32 character program supplied with the kit and the only one we successfully used so far:

It is possible to display from 4 lines (1/2 page) to 18 lines (2 1/2 pages) at a time. Unfortunately, the display always ends at the top of a page. The following locations control the memory area to be displayed:

Location	Contents	Bit Pattern
17AA	MSB of first address after last displayed line 'OR'ed with 80	10000xxx
17CD	LSB of first address to be displayed has to be a multiple of 20	xxx00000
17D2	MSB of first address to be displayed 'OR'ed with 80	100000xx

E.g. to display 0200-02FF: 17AA=83, 17CD=00, 17D2=82. You may have to adjust the vertical hold to keep the picture steady. Displaying page 0 you will see the important locations EF-FF. To display most of page 1 move the stack pointer to a lower address, preferably 1F (LDX \$1F, TXS) so the stack still fits.

6. You start the display by JMP 17AD. To exit the display mode use the NMI interrupt by storing the location of your driver program in 17FA/17FB and by pressing "ST" to exit the display program and to start execution of your program. To get a rough frame around the display start at 37AD instead of 17AD.
7. We have written several programs for TVT-6; a disassembler displaying 14 formatted statements at a time and checking for correct op-codes, Morse code teacher displaying the transmitted sequence of characters, and a demo program. These three programs incl. cassette and a complete description are being marketed by PAIA for \$4.95.
8. The next project is to add 1 K of RAM to our KIM by piggy-backing eight 21102s and to store the display and monitoring programs in that upper K. Will report on success (or failure).

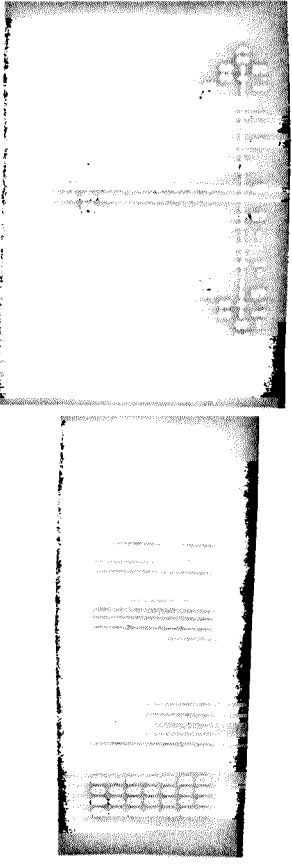

Disassembler Pictures taken off the TV screen

Demonstration Program

\*\*\*\*\*

Harold Kushner  
2100 Addison Court  
Cornwells Hts., Pa. 19020

#### NOTES ON THE TVT-6

Now that the Master Merlin (Don Lancaster) has returned to his retreat somewhere in Arizona (maybe someday he'll publish his address), it appears that it's up to us common folk to continue the magic of the TVT-6.

Several items which were glanced over in the construction articles become very apparent when actually using the interface.

#### 1. Memory Expansion

The TVT-6L - lower case board is set up to use memory locations 2000 on-up, so that KIM expansion is limited to the lower 4K option.

The TVT-6 - upper case only board is set up to use memory locations 8000 on-up, so that somewhat more memory can be included with, of course, additional decodings.

What this means is that you should carefully choose your system requirements before you choose your board. PAIA has admitted problems with the TVT-6L boards and is making its big push with the upper case only board.

#### 2. THE TVT-6/KIM Terminal

The Full Performance Cursor Program works great although I'm still trying to figure out what a "Spare Hook" is. The software does turn KIM into a terminal. However, once you get the KIM up and running with this program, the thought that crosses your mind is "Gee, I wish I had a computer to hook up to this fine new terminal". To get KIM to be interactive, as both terminal and computer is a whole different ball game. I am now investigating the possibility of using a hardware interface as a UART hooked through KIM's

**NOTE:** Instruction 0185 should be 03 instead of 01 to obtain proper scrolling. Also, individual control codes can be changed to accommodate different keyboards. (See Radio Shack keyboard hook up.)

serial port. This would make possible the use of KIM's serial interface firmware. However, this approach may be a case of the dog trying to chase its own tail.

#### 3. A Little Word Called Interrupt

A problem which immediately becomes apparent is that the SCAN routine is a trap. Once you're in it the only way out is through an interrupt. It would have been nice if SCAN had been a subroutine like KIM's SCAND that you could jump to whenever you wanted to display something, but the SCAN timing is critical and I have had little success in modifying that program.

So, up to this point, the only way I have found for KIM to continually update the display on its own is to use the interval timers in the interrupt mode.

#### 4. More Memory (SLURPI)

Using the TVT-6 gives you an insatiable appetite for more memory. Until I see a SCAN program for displaying just part of one page, I am forced to use 2 pages for display. That doesn't leave much room for an applications program or word storage.

Another funny thing happens when you go video - you don't want to look at the seven segment read-outs any more. They become totally passe. This must be caused by some psychological factor like watching TV for all these years.

I am hoping the Great Merlin will reappear soon! Until then, I would like to correspond with anyone using the TVT-6.

#### ASSEMBLING THE TVT-6

One of the many reasons why I went to PC 77 at Atlantic City was to tell PAIA Electronics what I thought of them. After all I had ordered Don Lancaster's TVT-6LK KIM/Video Interface right after his original article came out in Killoband in May (June 1977 issue). And it was now the end of August and still I had heard nothing! Well, PAIA was at the Convention and they told me about late deliveries and production problems etc, etc. Anyhow, I purchased a PVI-1K, which was equivalent to the TVT-6 appearing in the July and August issues of Popular Electronics. PAIA had a working unit on display and it looked great. They had taken Don's KIM connections literally and had used the expansion connector for the internal KIM/Video interface. I had determined from the very start that this approach was unacceptable and that I would not sacrifice my expansion capabilities.

#### KIM Expansion Rationals

I have had the basic KIM for a year now, and if anyone is worried that they will not have enough to do with a personal computer, my wife will testify to the fact that it has been a continual hassle to pull me away from the unit night after night after night. KIM has limitless applications. Over the time, however, I have had the urge to expand. The question I ask myself is "What can I expect from a fully expanded system?" The answer is a system with a decent Basic operating program, and video and cassette interface. Now, by buying an adaptive mother board, additional power supplies, memory, a video board and so forth, KIM could be expanded to provide any desired system. This would take several hundred dollars. With "PET" just around the corner, this piecemeal approach makes little sense to me. Therefore, I decided to keep KIM as simple as possible with expansion limited to as low a dollar figure as could be achieved. This approach included a Radio Shack ASCII Keyboard Kit (I already had the IC's), the TVT-6 video interface and eventually a low power 4K memory board, which would simply plug into the KIM expansion connector. I originally

was going to use a personal portable TV (A gift for my wife) as a display, but I picked up a surplus monitor for \$12.00 from Selectronics, 1201-25 So. Napa Street, Phila., Penna. 19146.

The screen was a little discolored from ten years of constant use, but who cared. After inserting the two required parts (a capacitor and width coil) she ran fine. So this was going to be my expanded system. At less than \$100 invested (minus the memory), I figured it would hold me for a while.

#### Building the FVI-1K

The FVI-1K Kit was somewhat disheartening, the first problem was the 36 pin mating connector. It did not come with the kit. The 'Pop' Ironics article stated the kit contained "all of the above parts" and one of those parts was the connector. A call to PAIA resulted in frustration. I couldn't get past the receptionist. "Yes, it was advertised, but we are not supplying any; and I don't know why", was the terse reply. I did finally manage to scrounge up a 72 pin version, but it was not easy to come by.

The advertisement said "sockets" and a strip of Molex Solder Cons were supplied. Well, I guess some people would call them sockets, but I wouldn't use them. To me, it was worth a couple of extra bucks for the real thing. When installing the sockets, I noticed that the registration of the PC board was far from perfect. Several of the holes were not exactly where they should have been and a few had not been totally drilled through.

All the land on the PC board was unprotected copper. This ~~was~~ fairly fast so I would advise cleaning with Scotch Brite before fabrication. I tinned all the land including the edge connector lands during assembly. This provided a less corrosive finish. A small amount of liquid flux applied to the patterns made the job easy. The excess flux is easily removed with alcohol when finished.

The board went together easily. There were no other surprises.\* I installed miniature spdt switches for the cursor and line length jumpers. These switches were obtained from Poly-Paks. A dpdt switch for conversion back and forth from KIM to TVT was mounted using epoxy ribbon on one of the brackets needed to mount the card connector. These brackets, by the way, were made from sawed off card pullers.

\* Except C5 was changed from 2200 pF to 210 pF to get the timing right.

When I tried to read in the PAIA/KIM cassette, I found the record level was too low for the KIM to respond so back it went to PAIA.

#### KIM Modification

Since I refused to give up the expansion connector to the video interface, I needed a new insertion point for the numerous inter-connections required for the TVT-board. I struck at the heart of KIM - the 6502. Here were most of the points I needed, and it was close to the new 36 pin mating connector which I installed at the top of the KIM board. I knew I would have to be extremely careful when "operating" in this area. It was an "all or nothing" operation, but I decided to go ahead.

The first thing I did was to make a Xerox of the bottom of the KIM board. This technique is surprisingly effective. I have used it several times before on other projects to make templates for drilling. The Xerox detail is remarkably clear and useful. With this picture of KIM's bottom, I was able to draw in exactly where the new wires would be placed. Some special tools I needed were the Vector Wiring Pencil, liquid flux, a precision tweezers, epoxy ribbon and a three wire grounded soldering iron. With my trusted wiring pencil in hand, I proceeded with the operation. It was not easy. When your're working with wire not much thicker than a human hair, things get a little tedious. By applying a tiny dab of liquid flux on each connection, things were made somewhat better. Also, the insulation was burned off the wire and it was properly tinned before applying it to the land to be soldered. The fine wires were held to the board with small dots of epoxy ribbon putty at strategic points. The modification was slow and painstaking, but when finished did not look too bad.

The TVT-6 provides a good, low cost expansion of your KIM's capabilities. I would not recommend my approach to a hardware novice, but if you do have some hardware and building experience by all means - go to it!

#### USING THE TVT-6 WITH THE RADIO SHACK KEYBOARD

The following list represents my implementation of the Radio Shack keyboard to the TVT-6 Full Performance Cursor Program. I used the MWI input to KIM instead of the IR input with the strobe ST. One correction to the published software C185 should be 03 instead of 01 to obtain proper scrolling.

Function	Key	ASC II	Change in Program
CLEAR	CLEAR	02	Address From 18
CARRIAGE RTN	SHIFTED	0d	---
CURSOR UP	SHIFTED	0b	---
CURSOR DOWN	LINE FEED	0A	---
CURSOR LEFT	BACK SPACE	08	---
CURSOR FIVE	CTRL	01	---
SCROLL UP	R. BLANK	05	11
SPACE HOOK	BREAK	00	12
ERASE TO END	HERE IS	03	13
CURSOR RIGHT	TAB	09	---

\* The published program is designed for wrap around scrolling. For use as open ended scroll change 01A7 from 20 (C2) (01) to 4C 75 01.

\* See Popular Electronics August 1977

Ronald Kushnier  
3108 Addison Court  
Cornwells Heights, Pa. 19120

\*\*\*\*\*



This is not elegant. It isn't even quick and dirty. Slow and dirty is about the best I can offer, but it works. I'm still trying to figure out how to operate the TVT-6. I eliminated the vertical blanking portion of Table II and used that interval (tracked by the timer and interrupt) for processing.

**CHANGES TO TABLE II IN THE TVT-6 ARTICLE**

17AD	A9 8D	INTOUT	LDA #8D	Load timer for interrupt
17AF	RD OC 57	STA	CLK11	plus free vertical sync
17B2	68	PLA		Recover registers
17B3	A8	TAY		Y
17B4	68	PLA		X
17B5	AA	TAX		A
17B6	68	PLA		Return
17B7	40	RTI		17B8 - 17BE not used
17BF	48	INTIN	PHA	Interrupt entry. Save A
17C0	8A		TXA	X
17C1	43		PHA	and
17C2	93		TYA	Y
17C3	48		PHA	

Just connect PB7 to IRQ or NMI and set that vector to 17BF. Start up with the following (relocatable) short patch and away you go.

0100	58	PATCH	CLI	Needed if you use IRQ
0101	A9 80	LDA	#E0	Set PB7 to output
0103	8D 03 17	STA	PEDD	to allow interrupt
0106	A9 8B	LDA	#8D	Start up
0108	8D 03 17	STA	CLK11	Interval timer with interrupt
010B	4C 00 02	JMP	PSIART	Go to program start

I used 8D16 cycles. This allowed my vertical hold to be nearly normal. Increasing the number will give more instructions per scan and vice versa.

Extras: If you only have the basic KIM, changing 17AA of Table II to 85, along with a slight adjustment to vertical hold will display pages 02, 03 and 00 consecutively allowing to fill the whole screen. In other words, a 24 line by 32 character display.

Michael Brachman  
50-1 Westbrook Hills Dr.  
Syracuse, N.Y. 13215

\*\*\*\*\*

...an excerpt from a letter from:  
Christopher A. Harris, 507 Dabney Hall,  
Univ. of Cincinnati, Cincinnati, OH 45221

"...I have stumbled upon a dismaying problem: I have always wanted a video display such as the TVT-6. It appears to me that I would not be able to use such a dedicated display due to the fact that it ties up so many pins on the expansion connector and so many memory locations (\$2000-\$EFFF according to the First Book of Kim) Do you know anything about this?..."

Chris.

There was some confusion concerning the addressing requirements of the TVT-6 since Lancaster also introduced the TVT-6L at about the same time. As it turns out, the TVT-6 needs \$8000 on up while the TVT-6L uses \$2000 on up. So you can add some memory expansion to Kim if you use the TVT-6.

\*\*\*\*\*

# FOCAL

FOCAL has been available for the 6502 for quite awhile now and offers some advantages that make it an attractive alternative to BASIC. The fact that an assembly-listing is available makes it especially beneficial to those of us who are interested in delving into the inner workings of a high-level language and perhaps modify it and/or extend to suit our whims. FOCAL includes provisions for adding to the command language and makes interfacing to machine language functions a piece of cake. BASIC offers none of this.

FOCAL is available from two sources at this time: ARESCO (P.O. Box 43, Audubon, Pa 19407) and 6502 PROGRAM EXCHANGE (2920 Hoana, Reno, NV 89509). They both offer FOCAL for about the same price, however the Program Exchange has developed a library of FOCAL programs including StarTrek, so I would highly recommend that you get their flyer and see what's available (I think it costs \$10). Also they have an excellent 104 page user manual which is available for \$12.00. I just received it in time to mention it in this issue and can recommend it as an effective means for becoming familiarized with FOCAL operations.

Up to this point, the biggest single disadvantage of FOCAL has been that there was no built-in way of saving and loading FOCAL programs using cassette or disc. Well, I have found a way to accomplish this and if you'll be patient I'll impart the knowledge to you.....(by the way, the absolute memory locations hold true only for the Version 3D (and possibly FCL-65E) other implementations will have to know where their particular pointers are).....

SIMPLE!!!!!! You have to do it to save the pointers PBADR (\$31,32) and VARBEG (\$3E,3F) and the data that is referenced indirectly between them. For instance: PBADR points to \$360A and VARBEG points to \$390F. Your storage device driver program should dump all data from \$360A to \$390F and also the pointers themselves which must be reinitialized when you re-load that particular program. How else is FOCAL supposed to know where that program is???

No, I haven't actually written a cassette driver for FOCAL (I use disc) but don't see any problem at all doing just that.. But, wait a minute...before we all go off on our own and write our own version of the ultimate FOCAL cassette handler, let's figure out some sort of a "standard". I think it's important to be able to work with named records instead of our regular ID number. All we really need to do is extend the ID portion of the KIM cassette format to include a fixed number of ASCII characters (say 8) and include an area for the pointer information that we need. It's necessary that we have some proposals by the next issue so we can get started on our driver software. As far as the command extension to FOCAL is concerned, let's reserve the letters "K" for KEEP (which will save the program on cassette) and "L" for LOAD (which will load a program from cassette into memory).

We may want to use a binary recording format for increased speed and could probably "lift" some of the code from the cassette driver presented in issue #7/8 (written by John Oliver).

More next time. Got any ideas about FOCAL that you'd like to see?

\*\*\*\*\*

**KIM SOFTWARE**

**9K MICROSOFT BASIC**

**INCLUDES:**

- Over 55 Commands
- Full String Handling
- 9 Digit Precision
- Hypertape Built-In
- 70 Page Manual

SPECIAL

Includes "DATA/SAVE"  
(Both Commands to Record  
Both Programs And Data!)

**KIM CASSETTE & MANUAL**  
**\$100.00** prepaid

**MICRO-Z COMPANY**  
Box 2426  
Rolling Hills, CA 90274

Bar Eric:

I've had a KIM now for about two years and have enjoyed and cursed. Also have two TIM's not yet implemented and a PET 8K, so have had some experience with almost all 6502 stuff (even played with an Apple once). For what it's worth, here are some comments in random order:

- (1) A lot of tape player problems are no doubt due to the fact that the output replicates the input, i.e., a signal being read is also present on the high or low output lines. This can, no doubt, in some tape players, cause all kinds of havoc--simple fix--when reading, unplug the mic or aux. Consult the KIM manual and you'll see the problem.
- (2) I have a KIMSI board, full of connectors, and 24K of Godbout Econoram, all of which ran when plugged in first time--no fixes, no glitches, just good results (also had a Godbout termination board). Also mounted up is a Burr-Brown 16 chan A/D which is expensive for home hackers but works well.
- (3) Terminal is a XITEC kit with CBC monitor--no troubles with the kit other than the video out looks impossible on a color TV and horizontal lines are more intense than vertical ones--could be annoying.
- (4) So much for hardware--I must say I've treated the KIM board shabbily like pulling off keyboard and displays, messing up for TVT-6, etc.--and it still works.
- (5) Yes, I tried TVT-6 and that too worked pretty well, BUT the display drops out if you are computing which is annoying to say the least. Cheap thrills for the home hacker and very useful for that but not for serious business.

All of which brings us to software--I have two languages up and running--FOCAL from the 6502 Program Exchange and Microsoft Basic via Johnson Computer. I'll try to remain objective and describe what's going on. First, I'd better explain that this system was supposed to be a desktop computer and data acquisition system, and so my requirements, especially on software, are somewhat more stringent than the average hacker's might be.

The first package I acquired was the Microsoft Basic. Put it on the recorder, wouldn't read in. Tried several other tape recorders. Finally found one that would read 2 out of 3 times (after diddling with the head alignment). Beware--recorders need good high frequency response for hypertape. Some can't deliver. Ordered 2 extra copies of the tapes, same problem. Sent them all back, and Johnson Computer verified them all and fixed some bugs in the process. This reading problem is bothersome but cannot really be blamed on anyone in particular--just think of the quality of some of the components we're using! Another, more serious problem with Microsoft Basic is that if it hangs up, for example, in a bad Read operation, or if for any reason you want to get back to the KIM monitor, the Basic crashes on reset and has to be reloaded. I've had some conversations (yes, plural) with Johnson Computer about this with no result. They can't help an awful lot anyway because they don't have a source listing from which to work, and I haven't time for a lot of blind poking around to provide a fix.

In the instructions, there is a letter from Microsoft which says, "...feel free to give us a call..." You can, but you won't be allowed to talk to anyone helpful, and will be referred back to Johnson Computer. Catch-22. As of this writing, no help is forthcoming.

The FCL-65E from the Program Exchange was, on the other hand, fully supported with a users manual, two cassette tapes, and a complete source listing with instructions for hackers and even memory allocation and calling routines for hacking built into the interpreter. This language read in first time on my machinery with no problems whatever. Easy to get in and out to KIM by reset and you can diddle with the language to your heart's content. FCL-65E does, however, have its drawbacks for KIM. There is no provision for cassette I-O even for programs; it will have to be written. The present version is slow. For those who have grown up with BASIC or FORTRAN, FOCAL will be a little strange, but it is much more flexible and compact than BASIC. There are no built-in routines for trig functions, log, or exponential but some written in FOCAL are suggested; I intend to try an arithmetic chip like National Semiconductor's.

I guess what I'm trying to say is that if you are content to use a language as it is, the Microsoft Basic is OK, even good, but you will be able to do much more effective hacking due to lack of source listing or support services. If you're a dyed-in-the-wool hacker, FCL-65E is a far superior purchase. A language without the source listing is useless to me; I won't buy another, which no doubt severely restricts my choices but I'll have to put up with it. I'm looking forward to 6502 PASCAL. if and when.

With regard to PET, not too much to say. It's a good machine, but I've been bombarded with proposals from Commodore to buy a bunch of very expensive hardware and software but after 8 months, don't yet have an operating manual or a de-bugged ROM; some of their priorities seem a little out of whack.

On balance, I'm enjoying my turbulent affair with microcomputing; the education, although sometimes frustrating, has been mostly fun. Keep up the good work.

Sincerely,  
*Don Latham*  
DONALD LATHAM  
Research Meteorologist/Physicist

\*\*\*\*\*

BOOK REVIEW

by the editor

THE CHEAP VIDEO COOKBOOK

by Don Lancaster

Lancaster has done it again with his latest effort. This book is all about the ins & outs of low cost video interfacing (you never would have guessed, right?).

The first half of this 250 page book is devoted to software and hardware design techniques for video displays. Lancaster's approach is a software-intensive one using the minimum necessary hardware.

(The same state-of-the-art principles which led to the development of KIM).

If you have already read his previous work "TV Typewriter Cookbook", you would be well on the way to getting the most out of "The Cheap Video Cookbook". If you haven't read it - then I suggest you do before you tackle Lancaster's latest. (beginners take note).

The rest of the book delves into a new - and even more devious TVT - the TVT-6 5/8.

In the words of the author-

"...This is a third generation design that picks up the best features of the TVT-6 and TVT-6L that earlier appeared in various issues of Kilobaud and Popular Electronics. New features added include the full graphics ability, transparency options, a simpler and cheaper overall circuit, and much more modest use of microcomputer address space..."

I strongly recommend you purchase this book, and his previous one, if you are interested in the use of his low-cost TVT design in your system.

"The Cheap Video Cookbook" deserves careful study by all students of advanced video interface techniques.

\*\*\*\*\*

## KIM - 1 / User Notes

I have run into a problem concerning use of the KIM interval timers. If this particular problem has not been addressed, here's what I have found:

Conclusion  
An interval timer write operation does not work properly when that interval timer count is crossing zero at the time of the write.

Try the following simplified test on your KIM.

```
LDA #NUM      A9 XX
STA 1704     8D 0417
LDA #FC      A9 FO
STA 1707     8D 0717
(wait)       AD 0717
BPL (wait)   10 FB
JMP KIM:CON. 4C 4F1C
```

The divide by 1 interval timer address is loaded with a starting count "XX". Five machine cycles later, a long time period is loaded into the timer (FO into 1707). The program waits for the long period to exhaust itself (~1 sec) and then returns to the KIM monitor. Normally, the execution of this program will make the display blank for about 1 second. However, if the number 05 is loaded in the first program steps (XX), the interval timer will not time out properly but will instead pass program flow immediately back to the KIM monitor. Now read the above conclusion again.

If your program using a KIM interval timer has appeared to fail occasionally, this may be the reason. The three KIMs I have tried all have this bug. Remember that the interval timers are always counting, and if one attempts a timer write at random times the write will be bad 1 out of 255 times on the average. Take the first two program lines out and verify that upon repeated manual random entries into the program the interval timer will occasionally fail. (1:256 ave.)

One can get around this bug by simply doing two successive writes to the interval timer used. e.g.

```
LDA #NUM
STA 1707
STA 1707
```

- If the first STA was done at a bad time the next STA will be at a good time.
- If the first STA was done at a good time the timer will also be OK at the second STA unless the first STA tries to load a 05 into a divide by one register. Therefore do not make the first STA involve 1704, 170C, 1744, or 174C. The second STA can then involve any timer register you want, to achieve the desired timing.

Timothy Martin  
Argonne National Laboratory  
Argonne, Illinois 60439

\*\*\*\*\*

## HIGH SPEED CASSETTE INTERFACE

If Hypertape is beginning to seem slow, then you can now get one better. Ziptape will run at 4800 baud!

Of course you'll have to abandon the KIM cassette software and hardware to do it - that's the tradeoff.

Ziptape consists of a small p.c. board with one comparator chip on it and the associated load and dump software. It costs \$26.50 and is available from Lew Edwards, 1451 Hamilton Ave.

It blows my mind to think that this little board with one I.C. on it can replace something like a Farbell cassette interface for the S-100 folks.

Ziptape works fine at 4800 baud on my Bankyo ST-50 but Lew cautions that some recorders may only be able to handle 2400 or 3600 baud.

More info can be obtained by sending him an S.A.S.E.

\*\*\*\*\*

FORTH for the 6502 will be available in the not too distant future. An excellent article appeared in Doctor Dobbs Journal (May '78) which explained the principles of FORTH and gave several programming examples. This language seems ideal for micro because it's so compact and interfaces easily with assembly language. We'll be seeing more of FORTH for sure.

Want more info on FORTH?

An excellent manual is available for \$5.00 from DECUS, 126 Parker St., Maynard, Ma 01754. Order FORTH Manual #11-232. This document contains enough implementation info to get a good idea of how it's constructed. If you only purchase one manual get the one from DECUS.

A Micro FORTH primer is available for \$15.00 from Forth, Inc., 815 Manhattan Ave., Manhattan Beach, Ca 90266. This primer is a very good introduction to the language. Get the one for the 6800 as they don't have a 6502 version yet. These folks are into selling industrial versions of FORTH for several thousand dollars so don't expect any help for hobbyists with questions.

There is rumored to be a Forth newsletter from Forth Interest Group, 787 Old County Rd., San Carlos, Ca 94070.

\*\*\*\*\*

MEANHILE.....

Are you wondering what's left from my equipment sale in the last issue? Everything's gone except the KIMSI, the two 8K memory boards, the 64x16 video board and the KIM enclosure.

That local user club in the San Fernando Valley area sure is active! Jim Zuber, club organizer, sent me the minutes of their last meeting.

If you're in that area and want to get in touch with this active group call Jim at 213-341-1610 or write him - 20224 Cohasset #16, Canoga Park, Ca 91306.

IN CLOSING....

That's right, were moving again. (we are becoming moving experts!) Brenda and I are really excited about the direction the newsletter is taking--we feel very positive that we'll be able to provide much better service to the 6502 fraternity. But we need YOUR support now more than ever. Let us know what direction you'd like to see our newsletter take.

MORE SOFTWARE? MORE HARDWARE? MORE ON HIGH LEVEL LANGUAGES?  
MORE ON THEORY? MORE TEST REPORTS? MORE ON SYSTEM EXPANSION?

# YOUR COMMENTS COUNT!