

BATTERIES INCLUDED



TM

# HomePak

BY RUSS WETMORE

FOR  
COMMODORE 64™

# HomePak™

Commodore 64™ Edition

Program design by

**RUSS WETMORE**

for Star Systems Software, Inc.

Commodore 64 conversion by Glenn and Ray Kreisel

Manual written by Ian Chadwick

Package design by MML & Associates Inc.

Typesetting by Small Faces Typography Inc.

## NOTICE OF REGISTERED TRADEMARK

In this manual reference is made to Commodore 64  
which is a registered trademark of Commodore Business Machines.

Copyright© Second Edition, January 1985 by Batteries Included  
All Rights Reserved



*"The Energized Software Company!"*

Telex 06-218290

PRINTED IN CANADA  
JANUARY 1985

30 Mural St. Richmond Hill, Ontario L4B 1B5 Canada

## HOMEPAK USER'S MANUAL

This manual and the computer programs on the accompanying floppy disks which are described by this manual are copyrighted and contain proprietary information belonging to Batteries Included and Star Systems Software.

This manual may not be copied, photocopied, reproduced, translated or reduced to machine readable form, in whole or in part, without the prior written consent of Batteries Included.

The accompanying floppy disks may not be duplicated, in whole or in part, for any purpose. No copies of the floppy disks or this manual or the listings of the programs on the floppy disks may be sold or given to any person or other entity. Notwithstanding the above, the accompanying disks may be duplicated for the sole use of the original purchaser. All rights reserved.

## LIMITATIONS OF WARRANTY AND LIABILITY

**BATTERIES INCLUDED**, or any dealer or distributor distributing this product, makes **NO WARRANTY, EXPRESS OR IMPLIED**, with respect to this manual, the related floppy disk(s) and any other related items, their quality, performance, merchantability, or fitness for any particular use. It is solely the purchaser's responsibility to determine their suitability for any particular purpose.

**BATTERIES INCLUDED**, will in no event be held liable for direct, indirect or incidental damages resulting from any defect or omission in this manual, the floppy disk(s), or other related items and processes, including but not limited to any interruption of services, loss of business or anticipatory profit, or other consequential damages.

**THIS STATEMENT OF LIMITED LIABILITY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. BATTERIES INCLUDED** neither assumes nor authorizes any other person to assume for it any other warranty or liability in connection with the sale of its products.

This manual and the computer programs on the accompanying floppy disk(s) which are described by this manual are copyrighted and contain proprietary information belonging to **BATTERIES INCLUDED**.

## PRODUCT IMPROVEMENTS

BATTERIES INCLUDED reserves the right to make corrections or improvements to this manual and to the related floppy disk(s) at any time without notice and with no responsibility to provide these changes to purchasers of earlier versions of its product.

## WARNING!

This manual and the programs contained on these disk(s) are protected by International Copyright laws. Duplications by any means is strictly forbidden and a violation of copyright laws.  
**VIOLATORS WILL BE PROSECUTED! All rights reserved.**

## TRADEMARKS CREDITS THANKS

"The following commercial products were used during the development of HomePak™:

**ACTION!™**

**ACTION!™ Commercial Run-Time Package**

**MAC/65™ (SuperCart version)**

**BUG/65™ (Disk version)**

OSS Inc., 1221 B Kentwood Avenue, San Jose, CA 95129

**The Next Step™**

Sierra On-Line, Sierra On-Line Building, Coarsegold, CA 93614

**Atari™ Macro-Assembler**

Atari Corp., 1265 Borregas Avenue, Sunnyvale, CA 94086

Special thanks go to Ron Luks for his untiring support, and to Joe Miller for all his technical help."

ACTION!™ is a trademark of Action Computer Services

MAC/65™ and BUG/65™ are trademarks of OSS, Inc.

The Next Step™ is a trademark of Sierra On-Line

Atari™ is a trademark of Atari Corp.

HomePak™, HomeText™, HomeFind™, and HomeTerm™ are trademarks of Batteries Included.

# Table of Contents

<b>Chapter 1 Introduction</b> .....	1
<b>Chapter 2 Getting Started</b> .....	3
Powering Up .....	4
<b>Chapter 3 HomeText</b> .....	5
Moving Around the Text .....	7
Search and Replace.....	10
Loading and Saving Files .....	20
Print Preview .....	12
The Printer Commands.....	13
Headers and Footers.....	17
Merging Files from HomeFind .....	18
Configuration Files and Defaults .....	20
HomeText Quick Reference Guide.....	21

<b>Chapter 4 HomeFind</b> .....	23
Entering Data .....	26
Changes and Corrections .....	27
Making Information Requests .....	30
Printing Your Requests .....	32
Merge Files .....	35
Quick Reference Guide HomeFind .....	36
<b>Chapter 5 HomeTerm</b> .....	37
Basic Technicalities .....	37
Placing or Receiving a Call .....	41
Transferring Files .....	44
Disk Features .....	45
Macro Commands .....	47
Configuration Files .....	49
HomeTrans .....	50
HomeTerm Quick Reference Guide .....	51
<b>Appendix 'A' Copying a Diskette</b> .....	53
<b>Appendix 'B' CompuServe</b> .....	55

# CHAPTER 1

## INTRODUCTION CONGRATULATIONS!

Congratulations! You have bought three excellent programs—a word processor, database manager and a telecommunications program—for less than the price you would expect to pay for any *one* of them from anyone else! But you're not buying just run-of-the-mill software with **HomePak**; you've got yourself three of the *best* programs of their type on the market. These aren't programs which have compromised power and quality for a low price; you're going to find features and functions in this package which are equal to or better than even the most expensive programs you can buy for your computer. And **HomePak** is written by a well-known, and respected professional programmer—Russ Wetmore.

There's no need to bend your ear with a lot of hyperbole. You'll find out quickly enough exactly how good and how powerful **HomePak** is. What's more, you'll find that the **HomePak** programs are easier to use than most others which offer similar capabilities—with on screen help menus and friendly prompt messages. **HomePak** finally gives a *real* meaning to the over-worked term 'user friendly'.

## HOMETEXT

In **HomePak** you'll discover **HomeText**; a word processor with all the features you need to do your personal, school and even business writing. It even allows you to 'preview' your text, seeing in graphic form how it will look on paper before you print it! **HomeText** can use information you stored with **HomeFind** and insert it into letters like the mail merge feature found in more expensive programs. You can use **HomeText** to edit files and 'chats' saved online with **HomeTerm**.

## HOMEFIND

You also get **HomeFind**, is a powerful 'natural language' database which stores and retrieves data in a manner similar to the way you think, without the complexity of rigid field structures and records. This deceptively simple method of dealing with information is more flexible and easier to use than many databases found on professional and business computer systems.

## HOMETERM

In the third program, **HomeTerm**; a simple but full featured telecommunications program which allows you to sign onto bulletin boards and databases, load and send files, chat and record conversations easily. It works with any modem which connects to the **Commodore 64** (such as the **1600 VicModem**, **1650 AutoModem** and **Hayes Smartmodem**, through an RS-232 Interface). **HomeTerm** brings you the exciting world of telecommunications without the difficulties of wading through arcane and obscure technical manuals.

In all you get three 'integrated' programs at a low price, on a copyable diskette, so you don't have to worry about damaging your master copy every time you load a program. Each program has been thoroughly tested and debugged to make sure it runs smoothly and properly. We're sure you'll find **HomePak** the best deal in a software package you've bought for your computer!

## NOTE

Throughout the text COM+ has been used to designate the special Commodore key  $\text{⌘}$



# CHAPTER 2

## GETTING STARTED FIRST STEPS

Format 2 disks  
Make a backup copy of the  
master disk

## PREPARING BLANK DISKS

Make sure your program disk  
isn't in the drive being for-  
matted.

**WARNING:** you cannot use a  
**HomeFind** data disk to store  
any other files or programs.

Before you begin with **HomePak**, you need to initialize some disks for your data and text files. You also need to make a backup copy of the master disk so that you can work with the **HomePak** programs without worrying about damaging your original disk.

**HomeText** and **HomeTerm** can both use any disk you use to store your programs and files on, but **HomeFind** needs a new, blank disk to keep your data properly. For your own organization, it's best to keep text files on their own disk, so you need to initialize a new disk for your **HomeText** files. You can use the same disk for **HomeTerm** as long as you have enough space for any files you download from another computer.

You'll need to format at least two disks; if you don't know how to do this from **BASIC**, then read ahead to *HomeTerm* chapter and use the "mini-DOS" menu and choose Format. Make sure your program disk isn't in the drive being Formatted **HomeFind** will format its own disks from within the program itself, so you only need to have a blank disk ready when you start it.

**WARNING:** you cannot use a **HomeFind** data disk to store any other files or programs.

Use the copy program we provide to duplicate the program disk (see Appendix A). Follow the screen instructions, using the original as the 'source' and a blank disk as the 'destination'. The computer will prompt you for each stage as the copy is being made. Once you have the copy, place your original in a safe place and only use it to make backup copies when required. Don't cover the write/protect notch on your backup copy with a sticker; you may want to change the screen colors to suit your own pleasure and save those changes to the disk as the new start-up colors.

The process of formatting and validating disks is further explained in the **Commodore** manuals. If you need more information, refer to them.

## 4 POWERING UP

When you're ready to start working with **HomePak**, turn on your system in the following order.

- Text
1. Television or monitor
  2. Printer and modem
  3. Disk drive (the first drive is number 8; make sure your **HomePak** disk is inserted in the drive **AFTER** it is turned on).
  4. Other disk drives
  5. Commodore computer

Type **LOAD "0:\*"8,1** and the main menu will load itself. You will need a modem attached to your system in order to use **HomeTerm**. You need a printer to produce 'hard' copy with any of the three programs, although you don't need one to create and store files or information. Make sure the volume is turned up a bit on the TV or monitor so you can hear the sound prompts.

Type **LOAD "0:\*"8,1**,

## THE MENU SCREEN



Fig. 1 Main Menu Screen

The main menu screen is how you get from one part of **HomePak** to another. If you press the **F5** key, you'll see the colored bar move from one program name to the next. The bar changes color for each program and gives you a little sound prompt.

Using **F5**, position the bar over the program you want to use and press **F7**. The chosen program will load. You will be prompted when you need to change your program disk for your data disk. You are now ready to begin using **HomePak**!

# CHAPTER 3

## HOMETEXT THE WORD PROCESSOR

To use HomeText properly, you'll need a printer

## BASIC WRITING FEATURES

Word processing is easily the most popular use for home computers (after entertainment). Until you've tried it, you're probably not aware of how easy writing can be with a computer. You can make changes and corrections, move blocks of text around quickly, change and replace characters, words or phrases, search for references and words in your text, delete unwanted material—all with a few simple keystrokes. Plus you get to save your text to disk as a permanent record, and come back to it any time. Once you begin to use **HomeText** for your writing, you'll wonder how you ever got along without it!

**HomeText** has several advanced features as well as the 'standard' functions mentioned above; for one, it allows you to take key information out of your **HomeFind** data and include it in the letters of text you write; very similar to the powerful 'mail merge' feature found in expensive business software. It also allows you to print in bold, enhanced or underlined text.

To use **HomeText** properly, you'll need a printer, connected to your **C64**. You don't need to have the printer on when you're just writing the letters, memos, reports or whatever to save them to disk, but you will need it hooked up properly in order to print out anything you write.

Load **HomeText** from the main menu by selecting the program and pressing the **F7** key. When the copyright screen appears, press any key to get to the writing screen.

Press any key once the program has loaded. At first, there's nothing on the writing screen; you have an empty screen waiting for you. Take a look at the bottom status lines on the screen; you'll see you're in 'Replacing' mode and you have about 13728 bytes left in the buffer. In order to see what you can do with **HomeText**, type in the first paragraph **above**.

As you type, the words will 'wrap' around the screen as you see below, in the proper places. When you get to the end of a paragraph (not a sentence), press the **RETURN** key. Use the **INST/DEL** to go back correct any mistakes. You need some sample text to try the various features described next. Before you do anything else to the text once you've typed it in, press **F5** and save the file on a blank, formatted disk under the name '**SAMPLE.TXT**'.

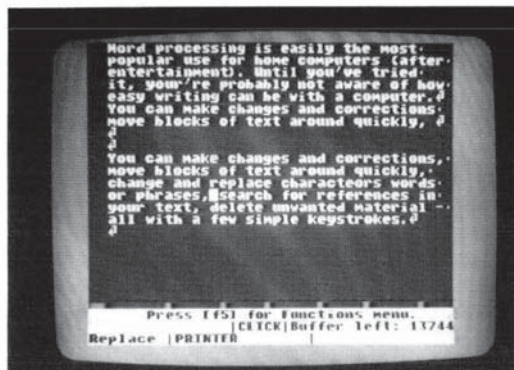


Fig. 2: Sample Text

All of this text won't fit on the screen at once; the top will scroll up and out of sight as you add text to the bottom. The status lines at the bottom of the screen will be explained in more detail further on in the text, but not to keep you in the dark, they are:

```
-----
:           A           :           B           :           C           :
:   D   :           E           :           F           :
-----
```

- A: current filename of text
- B: Key CLICK status
- C: Amount of memory left in the buffer
- D: **REPLACE** or **INSERT** mode
- E: current print output device (Printer or disk filename)
- F: current **HomeFind** merge filename (selected from Functions menu)

## MOVING AROUND THE TEXT

Move from the top to the bottom  
of the buffer by presing  
**CTRL + T** or **CTRL + B**  
To the top left with **CTRL + Q**

**HomeText** sees your document in two ways; as a whole buffer and as separate screens. You can move from the top to the bottom of the buffer by pressing **CTRL + T** or **CTRL + B** respectively; watch the screen display change when you do this. You can also move about the screen; to the top left with **CTRL + Q**, the middle left with **CTRL + A**. To move backward in the buffer a full screen, use **CTRL + W**, and forward a full screen with **CTRL + Z**. You can move to the beginning and end of the current line with **CTRL + S** (or **CLR/HOME**) and **CTRL + D**.

You should be familiar with the **Commodore** cursor control functions. The arrow keys (alone or shifted) move the cursor up or down a line and forward or backward a single space. **INST/DEL** erases the character left of the cursor and the **Commodore** key + **INST/DEL** erase the character right of the cursor. Use the **SHIFT + CLR/HOME** to erase an entire line. **SHIFT INST/DEL** adds blank spaces to the right of the cursor.

## OTHER FEATURES

Note the small colored marks  
above the status line; these are  
the 'tab stops'.

There are several features about this mode you will discover; the first is that the 'buffer space left' figure decreases with each character you type in. You'll see the "␣" character used to signify that you pressed **RETURN**. Where the word breaks are, you'll see a small dot which tells you the text continues on the next line. Finally, note the small colored marks just above the first status line; these are graphic representations of the 'tab stops'; described a bit further on.

Key combinations are described in the quick reference guide to **HomeText**. Practice moving about the screen and the buffer until you're familiar with these commands. Try adding more text and see how it affects the buffer size and your movement through it.

If you type on top of a character, your new letters write over the old—that's because we're in 'replace' mode. Try typing over a line of text to see how this works. If you want to insert a character, word or even a larger body of material into something you've already typed, press the **F1**; this toggles insert and replace modes; the screen border changes color to let you know which mode you're in and the message on the status line changes. When your buffer is almost full, you won't be able to use insert to add more characters than you have memory; you'll be put into replace mode automatically.

Press **F1**; this toggles insert and  
replace modes.

Press **F1** to go into insert mode. Move the cursor to the top of the buffer then use the down arrow to move to the beginning of the first paragraph and press the space bar five times; this indents the text properly. Move to the beginning of the next paragraphs (use the down arrow) and do the same. You'll see the words wrap around the screen to fit properly. Try placing the cursor in the middle of the text and typing a few words; watch how the line wraps around on the screen as the existing text is pushed to the right to make way for your new material.

Text Press **F1** to go back to replace mode. You can stay in whichever mode suits you best, toggling to the other when you need to. The border color changes will help to remind you what mode you're in.

**CTRL I** (or the left arrow beside the "I" key) moves the cursor to the next tab stop—set at every five columns. **CTRL I** doesn't force an indentation; it only moves the cursor. To indent the text, use the insert mode and add spaces to the front of a paragraph. To set a new tab location at the cursor position, press **SHIFT** plus the left arrow beside the "I" key. To erase a tab position at the cursor, press **CTRL** plus the left arrow.

The next step to learn is manipulating text 'blocks'. A block is any large chunk of text you want to move, delete or copy. Press **F7** to see the block menu appear in the middle of your text. Don't worry; it hasn't harmed anything. The window looks like this:

## BLOCK MANIPULATION COMMANDS

Press **F7** to see the block menu.

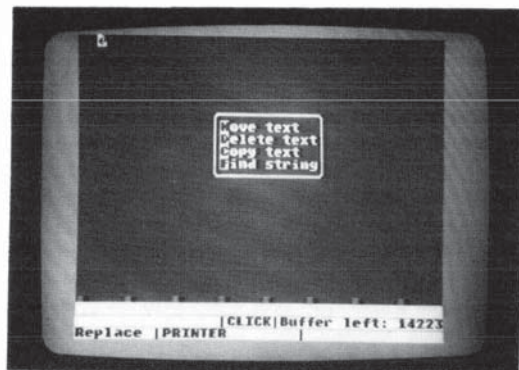


Fig. 3: Block Manipulation Window

Chose **Move text**. At the prompt, move the cursor (using the arrow keys) to the beginning of a paragraph you typed. Press **RETURN**. Then, at the prompt, move the cursor to the end of the same paragraph and press **RETURN**. This defines the block to move. Now move the cursor to the top of the buffer (**CTRL T**) and press **RETURN**. The block (paragraph) you

## MOVE TEXT

## COPYING TEXT

defined will be moved to the new location immediately, erasing it from its old location and inserting it into the new.

**Copying text** works exactly the same as moving text, except that it duplicates the block and leaves the original in place, so you have the block appearing twice in your text. Press **F7** again and choose Copy; place the cursor at the beginning of the first paragraph and press **RETURN**, then at the end and press **RETURN**. Move the cursor down one line and press **RETURN**. The block is copied to the new location; you'll see both blocks on the screen now, one below the other. Move and copy text only work with blocks up to one full screen in length.

## To delete a block

To **delete** a block, press **F7**, and define the paragraph you just copied by moving the cursor and pressing **RETURN** at the beginning and end of the paragraph as you did with Move and Copy. When you press **RETURN** again, the section you defined will disappear. Make sure you really want to erase it before you go ahead!

In case you chose the wrong feature, don't move the cursor at all; press **RETURN** twice; the computer will ignore the request. You can't move, copy or delete a block inside itself. If you want to leave without making any choices at all, press **RETURN**.

## SEARCH AND REPLACE

To find a word or phrase, press **F7**.

Whatever you search for should be typed exactly as it appears in the text.

To find a particular word or phrase, or even collection of letters in a text, press **F7** and choose Find string. Type in the phrase *business software* and press **RETURN**. Whatever you search for should be typed exactly as it appears in the text, using the correct upper and lower case characters. The computer begins a search from the current cursor location, so you if you want to search for a string in the entire buffer, move the cursor to the beginning of the text buffer first (**CTRL T**).

**HomeText** will stop at the first occurrence of the string it finds in the text and ask you if you wish to replace it. Type "Y" for yes, and when it asks you to type in the word or phrase to replace the original, type *computer programs*. **HomeText** will ask you if you want to replace every one of these words it finds in the text. Type **N** for no (right now, there's only one).

You will be asked if you want **HomeText** to continue searching for more occurrences of the word. If you say no, the search will end and the cursor will be on the first character of the word you searched for. Take a look at the last paragraph now; you'll see that *computer programs* has replaced *business software*.

**HomeText** will tell you if it didn't find the string in the text, and it will move the cursor to the bottom of the text buffer when finished searching or replacing. Use **CTRL T** to get back to the top.

## THE FUNCTIONS MENU

A popular trick used in word processing is to use a short form of a frequently typed word or phrase in your text—such as *wp* for word processing—and then replace every occurrence when you're finished writing; it can save you a lot of typing! Here's another small tip for advanced users; if you keep the **F7** key pressed down, the window doesn't appear; you can press **M**, **D**, **C** or **F** to choose your function, then answer the prompts. It will save you a keystroke or two.



Fig. 4: HomeText Functions Menu Screen

## LOADING AND SAVING FILES

Press the **F5** key.

Anything overwritten is erased for good, be careful.

When you press the **F5** key, you'll see this menu appear. Numbers eight and nine will bring you a directory of what's on the disk in that drive and how much space is left for files. To save the file (store it on your disk or print it), press **'S'** and answer with the file name **'MORE.TXT'**. If you have already loaded a file, you'll be asked if you want to save it with the same name again. The current filename will appear in the status line once you load or save a file.

To load a file from your disk, press **'L'** and type in the file name. To load the file you saved earlier, press **L** and type **SAMPLE.TXT**.

In case you still have text in the buffer, you will be asked if it's okay to overwrite it when you try to load a new file. Anything which is overwritten is erased for good, so be careful. You don't need to type in **"8"** after a file name, since this is the default here.



## 11 APPEND, NEW OUTPUT AND CONFIGURE PRINTER

NOTE: For HomeTerm you'll discover that you can make the screen a new output device, but this is not supported in HomeText.

### CONFIGURE PRINTER

### OTHER FEATURES

Append allows you to attach another file to the *end* of the current buffer, if there is room available for both files in the buffer. You *can* string files together for printing which are larger than the buffer space by using the 'include file' feature, described further along. Press **A** and answer **SAMPLE.TXT**. When you return to the text window, you'll see the file you saved was duplicated; the second copy was appended to the end of the first.

New output device allows you to choose your final output destination for the formatted print copy; you can rename the file and print it to disk or send it the printer. Don't use a disk filename for new output device if you have **HomeFind** merge tokens in your text; it will cause the file to be written and erased until **HomeText** encounters the **HF End-Of-File (EOF)** token. The default output device is "PRINTER". NOTE: For **HomeTerm** you'll discover that you can make the screen a new output device, but this is not supported in **HomeText**.

Configure printer allows you to change the default printer control commands (you can save these and several other changes to disk in the configuration file by pressing **CTRL + W** described later). **HomeText** supports three printer control codes you can change; bold, extended and underlined print. You enter the codes (up to five decimal values, each separated by a space) to turn the print commands on and off separately. These command values are found in your printer manuals. The screen tells you what the last or default values for each control commands are.

If your printer supports other features, such as italics, you can tell **HomeText** the control codes for this instead of either the bold or underlining features described here. Another way to do this is by using the 'special character' command, described below.

Before you change any printer codes, make sure you have the correct printer type established—**Commodore** serial printers (the default) or others (**Centronics** parallel printers using interface devices such as the **BusCard II BI Printer Interface** or the **Card Co**). Press the **@** key to choose your printer type; your choice can be saved to disk with your own configuraton file.

If you are using a **CARDCO** Interface with a paralell printer, before using **HomeTerm** , type the following from **BASIC**.

```
OPEN #1,4,25 (RETURN)
PRINT #1 (RETURN)
CLOSE #1 (RETURN)
```

This allows the interface to pass true **ASCII** characters to the printer.

## 12 PRINT PREVIEW

Extended and boldface characters are shown as yellow, underlined words as green.

### BUFFER COMMANDS

Before you clear the buffer make sure you have saved important material.

To print a file make sure your printer is on.

One of the most impressive and useful features of **HomeText** is the print preview function. This graphically illustrates on the high-res screen what your page will look like when it's printed, using dotted lines to replicate each line of text, highlighting any special printer features (extended and boldface words or characters are shown as yellow, underlined words as green; normal words or characters are printed in black).

Print preview works with line lengths of up to 158 characters and page lengths of up to 88 lines (how you alter these is described in the next section).

Try a preview of the file you have in the buffer; see how each word and paragraph is graphically represented on the screen. Press **RETURN** to continue when finished or (at any time during the preview), **F5** to quit. You will be told if your file is too large to preview.

If you want to preview a long text, save your writing to disk and clear the buffer. Return to the text screen and press **F3** and then **D** for include. Type in the filename of the text you just saved (with the correct disk id) and press **RETURN**. Now go back to the Functions Menu and Preview the text. It will be called up from disk and previewed for you.

To clear the buffer, use **CTRL C**; you'll be asked to confirm it first. This completely erases everything you had there—all text—so make sure you have saved any important material first, because you can't get it back once you've cleared it.

To delete a file on the disk, press **CTRL D** and give the file name. A deleted file cannot be restored, so make sure it's the file you want to delete first.

To print a file (send it to the specified output device), press **CTRL P**. Make sure your printer is on or else you'll get an error message. Print the file **SAMPLE.TXT** now and see how it looks. Save this copy to compare with a later printout of the same file after we've made some changes to it.

## 13 THE PRINTER COMMANDS

To format your file for your printer—set the margins, define special text features (extended, boldface or underlining), centering, justification and other features—you press **F3** and the window will appear. Formatting establishes how the output will look when it gets printed. Printer commands are inserted into your text at the location you want them to take effect. Press **F3** to see the menu which looks like this:



Fig. 5: The Printer Format Window

HomeText has several default values which will be used if you don't make any changes.

There are several things to watch out for when using this menu. First, make sure your cursor is in the right location before changing or adding a feature. The feature will appear on the screen, in inverse characters, where the cursor was positioned. The feature will be followed by a right-facing arrow key and in some cases be followed by a value. HomeText has several default values which will be used if you don't make any changes. In some cases, such as print features, you have to turn the feature on first, then off where you want to return to normal text. In such a case, the inverse name will be preceded by a left-facing arrow to tell you that this is where the command ends.

## 14 A QUICK EXAMPLE

Load the file 'SAMPLE.TXT' and place the cursor at the beginning of the first line-'All about word processing'. Press **F3** and choose 'C' for center text. Return to the functions menu by pressing **F5** and preview the text; you'll see the top line is now centered on the screen. Return to the text screen.

Move to the beginning of the second paragraph, press **F3** and then 'N' for line length. Choose 25 and press **RETURN**. Keep the cursor at the same place and press **F3** and 'S' for spacing; choose two and press **RETURN**. Now go to the functions menu again and preview the text; you'll see that the second and any following paragraphs are double spaced, with shorter lines. Practice using the printer commands and previewing their effects before you use them in your printed document. Before continuing on, re-load **SAMPLE.TXT** so you can try other features in an un-changed document.

### QUICK TIPS

You can delete a print format command by placing the cursor on the first character and pressing **COM+INST/DEL**. One useful hint is to create one common, handy print format with margins, headers and footers, page dimensions and other necessary commands together. Save it as a file so you can call it up any time and have your printer commands and page dimensions already entered when you begin typing.

For advanced users, if you keep the **F3** key pressed down, the window doesn't appear; you can press the desired letter to choose your function. This means, of course, that you need to memorize the proper commands in order to use this method.

### PAGE DIMENSION COMMANDS

Margins, page length, spacing,  
line length.

Use the print preview to see the  
effect of a command.

Commands which affect the dimensions of the printed page—margins, page length, spacing, line length—should all be placed at the top of the buffer, before you write any text. These include margins, line length, page size, line spacing and indentation of paragraphs. If some of these commands appear later in a file, they can cause your printing to come out rather awkwardly. Use the print preview feature to see what the effect of a command is when placed in the middle of the text (before) you start to print your file.

While you can vary these dimensions in almost any location in your text, it's a better practice to use standard dimensions throughout your document, rather than having the text appear in different forms in the same document.

To make your format commands easy to read, you can place a carriage return (press **RETURN**) between commands. Most of these commands are simple to use and obvious as to their functions.

**MARGINS**

Defaults are: left margin 5, right margin 70, top margin 6, bottom margin 61.

Margins can be changed anywhere in the text.

Page size and line length.

## PRINTOUT APPEARANCE COMMANDS

Line spacing

INDENTATION

**Margins** are the distance between the text and the edges of the paper: the number of characters from the **leftmost** edge of the paper at which the text starts (left margin) and ends (right margin, counted from the left side), and the number of lines from the top of the page that printing will begin at and end at (bottom margin). The initial defaults are: left margin 5 spaces, right margin 70 spaces, top margin 6 lines, bottom margin 61 lines (the normal page length is 66 lines from top to bottom and 80 characters wide).

Margins can be changed anywhere in the text, but there are some constraints; the left margin should be entered first, before the right margin. The value for the left margin **must** be lower than that of the right, so you won't have an overlap. Make sure you leave enough spaces between margins to print your longest word. To print a continuous output file with no top or bottom margins—say a draft copy for editing—set top and bottom margins both to zero.

You can use the margins to offset a section of text to emphasize it, a method used when quoting other material. Try this with the second paragraph. Make your left margin 10 spaces, your right 60 at the beginning of the paragraph you want to offset. Don't forget to return the margins to normal at the end of the offset section.

**Page size and line length** depend on your printer and the type of paper you're using. **HomeText** defaults are set for the standard page size; 8 1/2 by 11"—66 lines long and 80 characters (spaces) wide (tractor feed paper has an extra 1/2" on each side for the paper feed, but don't count it; it's ignored by the printer!). Don't set your page size or line length greater than your actual paper size, or you may end up printing on the roller or platen of your printer! You normally won't change your page size in the middle of a document.

Line spacing is the horizontal distance between lines on a page, counted in number of lines. Lines which follow each other with no space between them have a spacing of '1'. The space can be set to almost any length, up to 231 lines, but there's not much point in setting it greater than your page length. The default is one space. Line spacing can be changed at any time, say to double space one paragraph for emphasis. Make your second paragraph double spaced; don't forget to return to single spacing at the end of the paragraph or you'll find the rest of the document appears double spaced. Look at the effect with print preview.

**Indentation** is the number of characters **HomeText** will begin a paragraph in from the left **margin** (not from the left side of the page. The default is zero, so the paragraphs don't begin inset from the margin unless you change it. If you want to indent your paragraphs, enter an appropriate number; five is pretty standard. Indentation can be changed at any time; often text

## JUSTIFICATION

which is offset by changing the margins has no indentation.

**Justification** is a method of evenly spacing text in a paragraph so that it lines up evenly along both margins. To do this, extra spaces are added between words to make each line the same length. You must turn justification on and off where you want it; if you turn it on at the beginning of the buffer, before any text, and don't turn it off, your entire buffer will appear justified. You can turn justification on or off anywhere (it takes place on the next line after the command). If your text isn't justified, (called 'rag right') it will line up along the left margin only.

## CENTER

**Center** allows you to place the current line (it must be placed at the beginning of the line) in the center of your page, evenly spaced between the left and right margins. Center only works if your line is less than a page line long (fewer characters than the right margin size minus the left margin size). Center only works on one line at a time, it doesn't center paragraphs.

## BLOCK RIGHT

**Block right** aligns the right end of the current line with the rightmost margin. Like center, it only works on one line at a time, and only if the line is shorter than your page line length. Block right is often used to place your address and date at the right edge of the top of a letter, and the closing at the right edge of the bottom.

## QUICK TIP

**Bold**, **extended** and **underline** are all type commands. Each must be turned on at the place where you want to begin the special type, and off again where you want to end it. Place the cursor at these locations and call up the print command window, answering the screen prompt with "on" at the beginning and again, but with "off" at the end of the text.

TYPEFACES AND  
PRINTER COMMANDS

**Extended** type takes up twice as much space (in width) as normal type on a page. You won't see the typefaces on the screen, only the inverse characters for the commands to turn them on and off. Don't forget to turn off a typeface command or the rest of your text will use it!

Don't forget to turn off a typeface command.

You can see what text you have in the special typeface in print preview; extended and boldface words or characters are shown in yellow, underlined words appear as a green line, bold as yellow and normal words or characters are printed in black.

## IN PRINT PREVIEW

Extended and boldface are yellow, underlined green.

**Special characters** allow you to send printer function codes to your printer to get features not normally supported by **HomeText** (italics, super- and subscript, etc.). These characters are not counted towards justification, so you don't have to worry about throwing your line off. You type in the decimal value of the character you want to send to the printer (ie, ESC "A" is 27, followed by 65). Decimal values greater than 255 can't be sent to the printer.

## Special characters

Remember when sending special characters, that most features such as italics must be turned off as well as on, so place your special characters to turn on the feature at the beginning of the

End of page

QUICK TIP

Wait per page

## HEADERS AND FOOTERS

You can automatically count and number pages by placing an "@" in the header or footer.

text where you want it to take effect. Then move to the end of the text where you want the effect to stop and enter the special characters to turn the feature off.

**End of page** is a method of forcing the printer to end the page at the place where you place the command. **HomeText** will print any footer (see below) on the bottom of the page, then go on to start a new page. If you will be pasting pictures or graphics into your text, end of page is a good method to reserve a large blank space for them. Try placing an end of page command after the second paragraph in your text and preview it; see how the third and later paragraphs appear on the next page.

**Wait per page** isn't an appearance command; it tells the computer to halt printing until told to resume when you press a key. This allows you to insert separate pages one at a time when printing on a sheet-fed or letter-quality printer. It must be the first command on a line and should be at the top of your buffer. If your printer is a tractor-feed, dot matrix printer, you won't need to wait; each page is fed directly into the printer automatically.

You can include in your text one or more lines at the top and bottom of every page; chapter headings, page number, name or whatever, up to 255 characters in each (including carriage returns and formatting commands). The text at the top of the page is called a header, at the bottom it's a footer. A typical header might be:

Chapter 1: Word processing                      by Bob Smith  
Page @

This will automatically print out at the top of every page, and the page number will be incremented to show the right number. For emphasis, you could make the words "Chapter 1" boldface and center the phrase "Page @". You can see headers and footers in the print preview.

Header and footer commands must start at the beginning of a line. They may contain their own formatting commands after the opening command (such as centering, block right, etc.). They must be closed (off) with another header or footer command and the off command must be followed by a carriage return. Headers and footers can have carriage returns in them as well, so they can be more than one line long.

You can have **HomeText** automatically count and number your pages by placing an "@" sign in the header or footer.

## 18 INCLUDING FILES

Make sure when you print your file that the file to be included is on the proper disk before you begin.

Include allows you to link several files together for printing which would be too large (if combined) to fit together in the buffer. The include command can also be used to preview a text otherwise too long to fit in the preview memory buffer. You can also create special 'batch files' which have only your format files and a series of include commands for smaller files—say chapters—to print long documents.

When **HomeText** encounters the include command, it then brings the file named immediately after the command (the name must be a valid filename such as "TEXT.LTR,8") and prints it right after the last line (not footer line) in the current text. Make sure when you print your file, that the file to be included is on the proper disk before you begin.

If you want the included file to start on a new page, place an end of page command on the line before the include file command. Include file commands must be the first thing on a line. If you want to include more than one file, place the include commands one after another in the first file to be printed. You cannot 'nest' include commands like **FOR-NEXT** statements in **BASIC**.

To test this out, move to the bottom of the buffer (**CTRL B**) and press **F3**, inserting a new page command at the end. Then press again and insert an Include command, for **SAMPLE.TXT,8**. Make sure your printer is hooked up and go to the functions menu for printing the document. Watch how **HomeText** first prints the buffer, then goes to the disk to call up the next file and prints it. You'll also see the effects of all of your other format and printer commands in the printed file; the line spacing and margins.

## MERGING FILES FROM HOMEFIND

You can call up data from any **merge file** you have created in **HomeFind** by first entering the name of the **HomeFind** file from the functions menu (**CTRL H**), and then inserting the merge token in the text where you want the data to be printed. Up to 80 characters (**HomeFind's** maximum record length) can be merged into your text at a time. The merge token must be the only thing on a line, followed by a carriage return; it can't be placed in the middle of a line or within the text body.



The merge command will bring into your text the first record associated with that query (explained more fully in the **HomeFind** chapter). Of course, you will have to create the proper **HomeFind** merge file first in order to use this command.

When you use the **HomeFind** merge token, **HomeText** prints the first record into the body of your text. If there is more than one record in the file (say your file was titled 'address' and contained everyone's address from the entire disk), then **HomeText** will print the next record, with the same text; this is how you can print the same letter to several people in your database (mailing list). Simply type the merge command where you want to print the address, instead of typing the entire address out each time. **HomeText** will translate the down arrow characters into carriage return/line feeds where it encounters them. This merge feature can easily save you a lot of time in typing, especially where letters are involved.

More than one merge file record can be called upon in a body of text, but each must be available on the proper disk at print time, in the proper order to be included in your text. Each time **HomeText** encounters the **HF** merge token in the text, it includes the next record in the same file. So if you have address and phone number and two tokens in a letter, the first will be replaced by the address and the second by the phone number.

If you created a merge file called 'Bob', it will contain all of your data, such as address, phone number, shoe size, job, make of car (provided, of course, you have entered all of this into **HomeFind**). When you include the merge token in a letter to Bob, the program will print out several letters with each record, one right after another, in place of the **HomeFind** merge token. So the first letter will be okay if the first record is Bob's address, but the next will have the phone number instead of an address, the next a shoe size and so on. You end up with many letters, but only one correctly printed.

To avoid this problem, create proper merge files; only have in them the information you need to have printed out in that letter. If you create a 'generic' type file with too much information in it, you may find it easier to 'include' a file on a separate page which does nothing but cause **HomeText** to print the remainder of the records on the page without reprinting the text. This include file could be nothing more than a series of merge tokens to represent the remaining data in the file. So if your merge file has the address, phone number, job and work address in it, but you only want the address, include a file with three merge tokens on a blank page. This is faster and easier than printing four letters, one for each record!

If you want to create a label list, make your page length six, and your set top and bottom margins accordingly. Use a letter which only has an **HF** merge token as its entry.

Create a label list.

## 20 CONFIGURATION FILES AND DEFAULTS

Certain default values can be changed.

### HOMETEXT FILE TYPE

The **HomePak** disk contains a number of special files with a **.SET** extension, called *configuration files*; one for each of the three programs on the disk. These are records of the current screen, border and text colors, key click sound, printer type and other features specific to each program in **HomePak**. For **HomeText**, this also includes the three basic printer control codes.

You can change these features to suit your own use (see the quick reference guide in each program for what can be changed) and save these changes back onto disk by pressing **CTRL W** in the functions menu. When you load the **HomePak** program, the new settings will be loaded in automatically.

Certain settings in **HomeText** have default values which can be changed when you type the proper commands in your text. These are always the same when you begin to use **HomeText** each time. The defaults used are:

Left margin .....	5
Right margin .....	70
Top margin .....	6
Bottom margin .....	61
Page length .....	66
Line length .....	80
Line spacing .....	1
Justify .....	OFF
Indent .....	OFF
Wait at end of page .....	OFF

HomeText files are special, unique files for use with this program. To convert these files to **ASCII** or **HomeTerm (PET ASCII)** files for modem transfer, use the special **HomeTrans** translator program provided on the disk (and described in a later chapter). To convert other files to **HomeText** format for editing, use the same program.

# C64 HOMETEXT

## QUICK REFERENCE GUIDE

### CURSOR CONTROL KEYS

- CTRL + Q**  
cursor to top left of screen
- CTRL + A**  
cursor to middle left of screen
- CTRL + Z**  
cursor to bottom left of screen
- CTRL + W**  
cursor backwards one screen
- CTRL + X**  
cursor forward one screen
- CTRL + S**  
cursor to the beginning of the current line
- CTRL + D**  
cursor to the end of the current line
- CTRL + T**  
cursor to top (beginning) of buffer
- CTRL + B**  
cursor to bottom (end) of buffer

### OTHER KEYS

- CTRL + I** or **-**  
cursor to next tab setting
- CURSOR KEYS (SHIFT CURSOR)**  
moves cursor one space in direction of arrow
- COM + INST/DEL**  
delete one character to right of cursor
- COM + CLR/HOME**  
delete current line
- SHIFT - INST/DEL**  
insert character at cursor

### SCREEN CONTROL KEYS

- To change screen color:  
**COM + S**
- To change text color:  
**COM + C**
- To change border color:  
**COM + B**
- To change the screen margins (toggles 2 spaces)  
**COM + M**
- To toggle the key click sound:  
**COM + K**
- To set a tab location:  
**SHIFT - ←** (beside "1" key)
- To erase a tab setting:  
**CTRL + ←** (beside "1" key)
- To save these changes on your program disk:  
**CTRL + W** (Make sure your **data disk** isn't in the drive!)
- This will make your changes the new startup defaults.

### EDITING KEYS

- To delete the previous character:  
**INST/DEL**
- To delete the current line:  
**SHIFT - CLR/HOME**
- To insert a space  
**SHIFT - INST/DEL**

## FUNCTION KEYS

To select the printer command window:

**F3**

To enter the Functions menu:

**F5**

To select the text block window:

**F7**

### IN THE FUNCTIONS MENU:

To load a file into the buffer:

**L**

To save the buffer as a file:

**S**

To append a file to the end of the buffer:

**A**

To specify a new output device (Printer or filespec)

**N**

To specify printer configuration:

**C**

To get a disk directory:

**8 or 9**

To exit to the main menu:

**X**

TO SPECIFY A HOMEFIND MERGE FILE:

**CTRL H**

To print the buffer:

**CTRL P**

To clear the buffer:

**CTRL C**

To delete a file on disk:

**CTRL D**

To select the printer type:

**@**

# CHAPTER 4

## HOMEFIND THE INFORMATION MANAGER

You hear a lot about database managers these days, but what is a database? It is simply any organized collection of 'data' - that is, information, facts, details, notes, names and addresses and the like. A database manager is a means to add some sort of order to the data you have collected - for example, a name and address book is a simple method of organizing or managing that data.

Of course, computer database managers offer a lot more than storing your data; they offer flexible ways to retrieve, to sort and select the information. For businesses which deal with many clients, large inventories or staff, the database manager must be powerful, complex and very flexible. This usually means difficult to learn and expensive as well.

Database managers generally depend on a rigid framework of entry lines called 'fields', which, once you have established their size, usually remain fixed and cannot be changed. So if you decide you only need ten characters for a person's business title but you find later you have to enter 'Assistant Vice-president for Exemplary Sales Division', then you're out of luck. You have to shorten the title down to fit the field; something like 'Ast VP ESD' which doesn't help or tell you a lot. Many database managers aren't very flexible when it comes to this type of thing.

Most of us don't think of data anyway; we don't organize information into little fields in our heads. When you think of Bob Smith, you don't mentally look up a box called 'title'; you think "What's Bob Smith's title?". You don't perform a conscious 'sort and extract' routine when you think "Who's Bob Smith?", so why should you have to learn to fit your thinking into the vertebrate structure of a database manager?

Well, you don't; **HomeFind** is a 'natural language' information manager; you type in information the way it occurs to you; "Bob Smith's title's Assistant VP Exemplary Sales Division" and that's it. The next time you want to know about Bob Smith, you ask "who's Bob Smith?" and the computer will answer with all of the information you've typed in so far. Or if you ask "what's Bob Smith's title?", it will answer with "Assistant VP Exemplary Sales Division", just the way you typed it in.

All you have to learn is the simple syntax (style) for entering or retrieving information; you don't need to fuss about separate disks for separate data, about field lengths and extract parameters or the like. The process is simple, easy and remarkably uncomplicated for what you can do with it. There

## CREATING A DATA DISK

are some tricks you will learn as you work with it, especially how to properly organize your information *before* you start to enter it, so you can retrieve it in the best manner.

Load the HomeFind program from the main menu by pressing **F5** to move the colored bar to **HomeFind** and press **F7**. Follow the explanations which follow for creating a data disk and using the program.

Here is the screen you see once you have loaded the **HomeFind** program:



Fig. 6: HomeFind's Initial Screen

Make a new data disk.

Since you're just starting with this program, you'll need to make a new data disk. Remove the program disk and put a blank disk in the drive. If you're using more than one drive, you'll be able to change the drive number a bit further along. For now, just press **F5**.

The screen changes to the Function menu screen, and the prompt asks you to choose what you want to do. This is an abbreviated form of the screen, with only a few commands available. Later, when you are entering or retrieving data, you can press **F5** to see the full feature screen.

You make a new data disk by pressing **M** - a process which formats the disk in the drive noted at the bottom of the screen as the 'data drive', erasing any material on the disk. You can change the data drive if you have more than one drive by pressing **D** (do so now, and place your blank disk in the chosen drive) or you can exit to the main **HomePak** menu by pressing **X**. You can also return to the previous screen which asks for an already prepared data disk by pressing **RETURN** by itself.

We will choose to make a new data disk, so press **M**. You will next be asked to name your data disk - choose a name 12 or fewer characters long (including spaces, numbers and punctuation) and press **RETURN**. Use the **INST/DEL** key to correct any mistakes you make. You have a final chance to escape without making a disk by answering **N** to the last question on the screen once you enter the name.

**HomeFind** will format and prepare the disk, saying "Done!" when it's finished. Press any key to continue. You'll be back at the function menu screen again.

## FUNCTIONS MENU

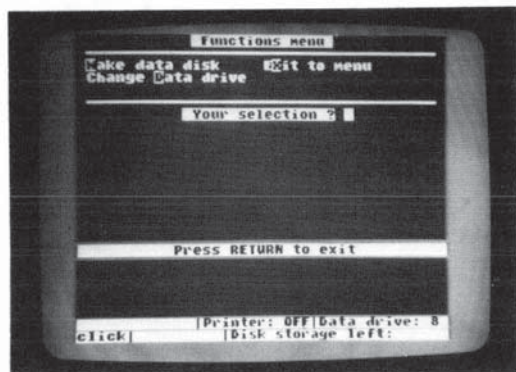


Fig. 7: The First Function Menu Screen

Press **RETURN** to exit and we will begin entering data on your new disk.

Keep your data disk in the drive and press **RETURN**. You will find yourself in the main **HomeFind** screen once the program checks your disk. Take a look at the bottom of the screen; now you'll see the name of your data disk in the left corner and the number of bytes left on the disk in the lower right; 174434 when you start with a new disk, or about 7000 words.

Before you type anything in, check the quick reference chart to see how can you change many of the parameters of the program. The **F3** key toggles the printer on and off. **COM K** toggles the key click. **F5** returns you to the Functions Menu screen. **COM +** and **COM -** will let you change the screen colors, **COM I** changes the text color.

You can save these changes as a configuration file on your backup program disk by pressing **CTRL W** from the function menu screen (not when you're in the data entry screen) and make them your own startup defaults. The original default configuration file will be erased when you do this. **CTRL W** is one of several commands not mentioned on the function menu screen (see the quick reference for these commands). Make sure your **program** disk is in drive one, **NOT** your data disk, when you save a configuration file!

Make sure your program disk is in drive one, **NOT** your data disk, when you save a configuration file!

Okay, so let's try a few simple examples of entering information. Type this in exactly as you see it here:

Mike's birthday's April 18, 1958.

Press **Return**. You'll see what you type appear in the lower middle section of the screen. The top of the screen will tell you "Mike's news to me! New subject? Y/N". The computer has just told you it has never heard of Mike and wants to know if Mike is a new subject. Answer with "y" for yes. Then the computer will say "birthday's news to me! New tag Y/N?". Again, the computer wants to know if 'birthday' is a new tag to use in identifying 'Mike'. Answer "y". The computer will now save the information to the disk and tell you "Thanks!".

Every time you enter a new subject or a new tag, **HomeFind** will ask you if it's new. You answer "y" for yes and the new item will be added to the information on disk. If you answer "n" or any other character, the entire entry will be ignored.

## INFORMATION ENTRY SYNTAX

'Subject', 'tag' and 'object'.

What you have done is enter your first 'subject', 'tag' and 'object'. The process of entry is always done in this simple three part form:

subject's tag's object



27 Notice the apostrophes—they are very important.

Notice the apostrophes (the "" characters) - they are very important: they are the markers which tells the computer where each portion of the subject and tag in an entry statement ends. The computer 'parses' (analyses the grammar of) each line to break it up into these parts so it can store them on the disk and retrieve them properly later. You can type in up to 80 characters for each part and the computer will treat it all as one segment until it reaches the "'s" break. This means that "Account #12345's", "follow up date for contract signing's", "'Mike's" and "serial number's" are all individual, legal entries.

Rules are few and simple.

**HomeFind** creates three indices; one index for each of subject, object and tag. You can ask for information in any one of them. The rules are few and simple:

1. Subjects and tags can't have apostrophes in their names, but need an "'s" added to the end.
2. Objects can't have apostrophes in them, even "'s".
3. A tag cannot be the same as a previously chosen subject and vice versa.
4. To avoid confusion, an object should not be the same as a previously chosen subject or tag.
5. Each part cannot be longer than 80 characters and the entire line cannot be longer than 144 characters.
6. An entry must have all three parts.

Your entry must have all three parts to be correct.

Your entry *must* have all three parts to be correct. If you are missing any part, the computer will ask for the object. You can press **RETURN** to quit and the computer will say "Never mind!", which means it has ignored what you typed in. If the entry has a subject and tag which you have already entered, the computer will respond as if you were asking it for information. If you type "Mike's birthday" by itself, the computer will tell you "April 18, 1958".

If you type in some information which is already entered, the computer comes back with "That's no news to me!". If you type an entry which has the same subject and tag but a different object - say "Mike's birthday's June 5, 1950", the computer will respond with a message like "Mike's birthday was April 18, 1958. Add or change? A/C". You can do either or press **RETURN** to quit that entry and the computer will say "Never mind!". But if either the subject or the tag are different, the computer will accept the entry. It will save the new entry *as well* as the old if you choose to add the change.

## CHANGES AND CORRECTIONS

While typing, you can use the **INST/DEL** key to correct your entry, or erase the entire line with the **SHIFT-LEFT CURSOR** combination. But what if you make a mistake in the information? Say

For changing an entry use the word *'isn't'*.

you type "Cindy's sign's Virgo" but you later find out she's really a Pisces. Then you want to change it.

The first method is to type the same line again, this time with the new, correct information: "Cindy's sign's Pisces". The computer will tell you that her sign was Virgo and ask if you want to add or change the entry. This method only works if there is one object for a particular subject/tag combination. If you choose to add rather than change, then the next time you enter Cindy's sign, the computer will assume you're merely adding to the growing list. This way, you can make something Like Bob's dog's mean, nasty, vicious or whatever, all together.

The best method for changing an entry (and the only one which works when there is more than one subject/tag combination) is to use the word *'isn't'*, so "Cindy's sign isn't Virgo". The computer tells you the original entry and asks if you wish to replace it. You answer "y" and the computer asks what Cindy's new sign is. Enter the new object and press **RETURN**. The computer will tell you "Thanks!" when finished. If you answer "n", the computer deletes the entry completely, returning with "Forgot it!" when done. Any other key than "y" or "n" cancels the request to change completely.

Continue entering the information you wish to store on the disk. For the examples below, type in the following:

Robert's birthday's March 23, 1953  
 Mike's favorite color's blue  
 Mike's car's Honda  
 Mike's phone's 929-9909 (home)  
 Mike's phone's 596-1405 (office)  
 Robert's car's Chevrolet  
 Susan's favorite color's yellow  
 Robert's phone's 233-3331 (home)  
 Robert's favorite color's blue

A little experimentation will show you that the computer will accept "mike" equally well as "MIKE" or "Mike". The program stores the information in the form you enter it, with upper and lower case intact, but it replies to your request in the case you ask in. So if you have entered "Mike's dog's Rover" and ask "what's mike's dog?", you get "mike's dog's Rover".

Your screen will now look something like this:



Fig. 8: HomeFind's Main Screen

## ADVANCED DATA ENTRY TIPS

### Apostrophes

As you enter information, watch the 'disk storage left' line to see how much space you've got left on the disk.

Entering a lot of similar data can be a bit of a chore. What if you wanted to enter a long list of friends' telephone numbers? Can you imagine typing "Bob's phone's 255-4491, Judy's phone's 633-9090, Ian's phone's 444-2321" for a hundred friends? That's when the apostrophe comes into its own.

You can use an apostrophe as a 'ditto' (repeat) mark when entering repeated subjects or tags. You must have one blank space before and after the single apostrophe in order for **HomeFind** to recognize it. In the phone list, you could type the first entry "Bob's phone's 255-4491" and then type all the others as "Judy's ' 633-9090, Ian's ' 444-2321" etc., using the apostrophe to signify the tag 'phone'.

### Multiple Line Entries

Sometimes you want to break an entry up - particularly objects - into several lines rather than one long one. To do this, you insert a Down Arrow in the entry by pressing the **DOWN CURSOR** key where you want the line to break. For

example: "Mary's address's 20 Main St[down arrow]Apt 301[down arrow]Dorado[down arrow]Calif 90108". When you ask "What's Mary's address?", you get:

Mary's address's  
 20 Main St  
 Apt 301  
 Dorado  
 Calif 90108

### Comments

Sometimes it's useful to be able to comment your entries with additional information that you don't need to reference in your requests for information. In the examples "Mike's phone's 929-9909 (home) and Mike's phone's 565-1405 (office)", you might like to keep the information about home and office out of the main entry so you don't have to remember exactly how you entered it when asking for information later.

To comment an entry, you use the UP ARROW + key, like this: "Mike's phone's 919-9909 + home" and "Mike's phone's 565-1405 + office". Any characters after (and any spaces before) the "+" character are treated as a comment. Comments are ignored when **HomeFind** searches for information for a request.

## MAKING INFORMATION REQUESTS

Once you have enough information entered, you will want to retrieve it; after all, that's what a database is really for. So let's try a simple request. Type "who's mike?". You should get this:

Mike's phone's 929-9909 (home)  
 Mike's phone's 596-1405 (office)  
 Mike's favorite color's blue  
 Mike's car's Honda  
 Mike's birthday's April 18, 1958  
 That's it!

If you type in "what's Mike" or even just "mike", you'll get the same response. You can ask for simple requests on any single subject, tag or object and get everything related to that request. You can also use the pronouns 'when' and 'where' interchangeably with 'what' and 'who'. Punctuation in your requests is optional but helps keep the process friendly when you use them; "who's mike" works as well as "who's mike?" but the latter is easier to use.

31 You must type in the request exactly as you entered it.

"News to me!"

Try other simple, single item requests like "what's phone?" and "favorite color" to see what happens. You **must** type in the request exactly as you entered it; you must use "favorite color", not simply "color" or "596-1405 (office)" not merely "596-1405" or you will get the message "News to me!". This is why you should use comments to add information like office or home for phone numbers; you won't have to worry about the exact way you entered them later.

If you ask about something you *haven't* entered yet, you'll get a polite response "News to me!". If you have objects which are the same as a subject or tag, you won't be able to retrieve information about them with a simple request; you'll get the information for the tag or subject reference instead. For example, if you type "Dave's friend's Jim" and "Jim's friend's Paul", if you request only "Jim", all you'll get is "Jim's friend's Paul". You'll have to use combined requests, described below.

## GETTING SPECIFIC: COMBINED REQUESTS

You can be more specific with your requests. You can ask, for example "What's Robert's favorite color?" or "What's Mike's car?" and get the answer. Now if you ask something that you haven't entered previously, such as "what's Robert's house?", you'll be told the new item is "News to me!" and be asked if it's new (in this case, a new tag). Then the computer will say "Tell me, what's Robert's house?" and you can answer with the correct object. If you now say "What's Mike's house?" the computer will say back "News to me! Tell me, what's Mike's house?" and wait for your answer. Hitting **RETURN** alone cancels the entry.

You can use "who's" and "what's" interchangeably.

When you ask questions, you can use "who's" and "what's" interchangeably. Also, you don't need to end the query with a question mark except for good form.

## MORE SPECIFIC: ANALOG REQUESTS

So far, you haven't been shown any real magic; just simple, clean requests. Now you'll learn some neat tricks. Type in the following:

Robert's nickname's Bob  
Robert's hobby's fossil collecting  
Acct. #1552's outstanding credit's \$145  
Acct. #1552's credit limit's \$500  
Acct. #1552's name's Lisa Harris

HomeFind can only deal with requests if the object is unique.

So now you can ask "what's Bob's hobby?", since Bob has been cross-referenced with Robert. By the same token, you can ask "What's Lisa Harris's outstanding credit?" and "what's Lisa Harris's credit limit?".

There's a hitch to this. **HomeFind** can only deal properly with an analagous request if the object associated with the request ('Bob' or Lisa Harris in these examples) is unique and not used elsewhere on your data disk. So if you type:

Bill's nickname's Bud  
 Bill's hobby's music  
 John's nickname's Bud  
 John's hobby's boating

and you ask "What's Bud's hobby?", **HomeFind** would respond with one reference, the last one typed, but wouldn't be able to distinguish between Bill and John or know which one you were referring to here.

You must also make sure you order your information in a way that makes an analogous query meaningful, as well as asking a relevant question. If you type:

Susan's bike's red  
 Susan's cat's Tibby  
 Susan's nickname's Sue

then when you ask "what's Sue's bike?", you get "Sue's bike's red", which is fine, but if you ask "what's Tibby's bike", you get "Tibby's bike's red", which is silly! Analogous requests require you to think out the request clearly before you ask, so that you don't get an answer which has no meaning. The OBJECT you use in an analogous request should have some meaningful relationship to the TAG.

HomeFind doesn't provide a report printout like many other programs; most home users don't need a fancy print out of their data. Instead, we offer a simple, easy method of printing: the **F3** key toggle. Press it once and the "Printer: OFF" line at the bottom of the screen becomes "Printer: ON". Press it again and it goes to OFF. Make sure your printer is turned on in order to print.

When the printer is on, it echoes everything *relevant* which appears on the screen to the printer; your new entries, your requests, plus everything you list when in the functions menu section, below. You won't get prompts or error messages cluttering up your printout.

**Make sure you order your information.**

The OBJECT should have some meaningful relationship to the TAG.

## PRINTING YOUR REQUESTS

The F3 key toggle.

**Make sure your printer is turned on in order to print.**

You can press the **F5** key any time and immediately be transferred to the functions menu screen. You will see that once you begin to enter data, several new options become added to the few we saw before, which are described above.



Fig. 9: The Function Menu Screen

Never insert a new data disk without first using the *new disk* feature.

When you use **HomeFind**, you can only have one disk in one drive active at a time. In order to change the disk, you must select **N** for new data disk. If you simply insert a new data disk without using this feature, you will damage it and destroy the data on it **PERMANENTLY** when **HomeFind** writes something to the disk. **Never insert a new data disk without first using the new disk feature.** You will be prompted to insert the disk. **HomeFind** maintains certain information about the current disk in memory which is cleared out when you use this function.

Make sure you put your new disk in the proper drive if you have more than one. If you choose the wrong drive number, you won't be able to enter or request any information until you change it to the correct drive. Use the **N** function even after you make a new data disk, before you write to it, or request any information from the disk (including listing all subjects and tags).

Since **HomeFind** uses a special disk format for its *data*, you can't copy it normally (or write anything to the disk). That's why we have provided a simple routine to make backup copies of your

Always back up your data disks after each session.

*Backup* formats the disk first, so anything on it is erased.

Choose **K** for compress to reorganize your data disks.

Don't remove your disk while it's being compressed.

Run the compress function periodically.

If you make a new data disk choose **N** to use new data disk before you attempt to read or write.

**CTRL W** writes a new startup file.

data disks. You should **always** backup your data disks after each session with **HomeFind** when you have made additions, deletions or changes. Choose **B** and follow the screen prompts to insert the proper disks in the drive as necessary. Backup formats the disk first, so anything on it is erased.

It's often useful to see the list of all subjects and tags you have on a disk, especially when you're adding or changing a lot of data. The **S** and **T** choices will print the list on the screen for you. In order to get a printed copy, press the **F3** key before you make the choice, and again after to turn the printer off.

**HomeFind** deletes objects automatically, but not subjects and tags. When you delete an entry, the program doesn't run through every connection and make sure something wasn't filed under that heading. This would simply take too long to do efficiently, but it can leave 'dangling headings' on the disk which take up space but aren't used as references. To correct this, we have a special feature called compress which you should do regularly to your data disks.

Choose **K** for compress to reorganize your data disks. It cleans up the disk, reclaiming lost space, removing deleted entries and making sure all of the links are correct. The screen will show that it's working, with a dot printed for each step along the way. Depending on how much information you have stored on your disk, the process can take quite some time to complete. Don't remove your data disk while it's being compressed or you will damage it permanently.

You should run the compress function periodically to ensure you don't have any dangling headings on your disk and the space is properly used. This is especially important when you have made a lot of deletions or changes to your data. Make sure you backup your disk before you compress it, just in case. After you compress a disk, **always** choose **N** for "new" data disk so the program will read the new directory properly.

Make a new disk, change **Data** drive and **EXit** to the main menu were all discussed earlier. Remember that when you make a new data disk, the blank is formatted first, erasing any material on it. If you make a new data disk after you've been working with another, make sure you choose **N** to use new data disk **before** you attempt to read or write from the disk or you may cause an error.

While it's not on the menu, **CTRL W** writes a new startup configuration file to your **program** disk. Make sure you remove your data disk and place the backup program disk in the drive **BEFORE** you write the new file; if you write it to your data disk, you will damage the data permanently!



## 35 MERGE FILES

A special feature of **HomeFind** is the merge file; it creates a special file on a regular **Commodore** diskette which can be read into your document from **HomeText**. Press **CTRL C** in the Functions menu; the program will ask you for a search request; answer with a valid query: Subject, Tag or Subject's Tag. The search response is saved in memory; only as many objects as can be stored in memory can be saved as a file. Then give a disk filename. **HomeFind** will write to disk all of the Objects associated with your query.

To create a mailing list.

Later, when using **HomeText**, you can insert 'merge tokens' into the text in order to call up the objects saved in this file. This is explained in more detail in the chapter on **HomeText**. If you want to create a mailing list, then use 'address' as your search request; the entire range of addresses on your disk (Bob's address, Sue's address, Mike's address, etc.) will be saved in the file. Records are printed into your **HomeText** documents in the order in which they are saved.

You can use other database managers to create valid merge files, as long as certain rules are followed: the entire record (not file) is no more than 80 characters long, multi-line entries are separated by ASCII character 29 (the down arrow) and each record is separated by one and only one carriage return.

## DISK SPEED

In **HomeFind**, the slow speed of the Commodore 1541 disk drive is most apparent. If you are going to be using **HomeFind** in a business application or on any frequent basis, you may wish to consider the purchase of a parallel disk drive and an **IEEE** interface such as the **MSD**® disk drives and **BUSCARD II**® interface. These will be found to speed up disk access considerably.

# C64 HOMEFIND

## QUICK REFERENCE GUIDE

### SCREEN CONTROL KEYS

To change screen color:

**COM +** and **COM -**—To change the text color:

**COM I**

To toggle the key click sound:

**COM K**

To save these changes on your program disk:

**CTRL W** (make sure your **data disk** isn't in the drive!)

This will make your changes the new startup defaults.

### EDITING KEYS

To delete the previous character:

**INST/DEL**

To delete the previous line:

**SHIFT LEFT CURSOR**

### CONSOLE KEYS

To toggle the printer on and off:

**F3**

To enter the Functions menu:

**F5**

To create a merge file for **HomeText** use:

**CTRL C**

### INFORMATION SYNTAX

To enter information:

Subject's Tag's Object

Example: David's bicycle's red

To retrieve information:

Allowable pronouns: Who's, what's, where's, when's

Single item query: pronoun subject, or

pronoun tag, or

pronoun object, or

simply enter the single word

Multiple item query: pronoun subject's tag, or

pronoun tag's object, or

subject's tag (no pronoun),

or

tag's object (no pronoun)

Analogous query based on object:

pronoun object tag, or

object tag (no pronoun)

### IN THE FUNCTIONS MENU:

To create a new data disk:

**M**

To change the drive number where the data disk is:

**D**

To copy the data disk:

**B**

To change to a new data disk:

**N**

To list all subjects on the data disk:

**S**

To list all tags on the data disk:

**T**

To compress the data disk:

**K** (Always do a **(New)** after a compress)

To exit to the **HomePak** menu:

**X**

# CHAPTER 5

## HOMETERM THE TELECOMMUNICA- TIONS PROGRAM

Computer-to-computer  
communication.

Most of the features of  
HomeTerm do not work without a  
modem.

## BASIC TECHNICALITIES

The speed of communication

Telecommunication means computer-to-computer communication over the telephone line; linking your computer with one or more others so that you can send and receive programs or 'electronic mail', transmit or read information, chat with other users, store files, do electronic shopping or banking, read on-line magazines or even an encyclopedia.

Modems (for modulator/demodulator) are the devices which link computers, translating the electronic signals from your computer into an audible tone which is then transmitted along the phone lines. The tones are translated back into recognizable signals by the modem at the other end. If you have ever lifted your telephone receiver while transmitting or receiving a file, you will have heard the sound of the modems 'talking'. This isn't a recommended practice however - it almost always causes your data to become scrambled or garbled when you pick up the receiver to listen.

Modems are serial devices - meaning they transmit data sequentially, one bit at a time, turning the eight bits (one byte) of a character into a stream of bits which follow one another. Your computer re-assembles the bit stream back into bytes when it receives data from the modem.

The first thing you'll need to use this program is a phone number of a local bulletin board system, users group, on-line network such as CompuServe or a friend who has a modem hooked up to a computer. Not all of the features described work properly without a modem attached, so make sure it's on before trying HomeTerm.

Telecommunication isn't difficult or very complex, but it does require that you understand a few technical terms and how it works in order to use it properly. You may have to try the program out several times to get the hang of it.

The first thing you need to know is the speed of communication; both computers have to talk to each other at the same speed. This is measured in *baud*. Most home computers transmit at 300 baud, which translates to roughly thirty characters per second or three hundred words per minute. Many newer modems can switch to 1200 baud - four times as fast. People used to use 110 baud - a very slow speed - before faster modems became cheaper to buy. The so-called 'smart modems' can work at several speeds and even tell what speed the other computer is working at and adjust to it. Check your modem manual for

details. You should try to find out what speed the other computer is using before you call it up.

The next item is *duplex*; modems are capable of transmitting data in both directions at the same time; in 'full-duplex' state (sometimes called 'echo-plex'), they do just that, just like two people talking at the same time on a telephone. Your screen shows you what the other system echoes back to you. Full duplex is the faster mode. In 'half-duplex', you transmit only one way at a time (say, to the other computer), then the other way (back to your computer), like a CB radio. Your screen shows what you type, without an echo to your screen. When you're in half duplex and the other system is in full, you get double of characters, so if you type "HELLO", you end up with "HHEELLLLLOO".

Which duplex you need depends on what the other person is also set at! There are no set rules for duplex; you will have to try one or the other if you have any troubles communicating. The duplication of characters you type is a good indication that you need to switch duplex. Often switching your duplex will cure any problems. Some modems have a switch to set the duplex mechanically; make sure the switch setting conforms to the mode you need. Experimentation will show you what's necessary.

There are several choices involved in communications and transmitting (*uploading* or receiving (capturing or *downloading*) files. The first step is to establish what type of computer you are communicating with. Most computers converse with each other in 'ASCII' code - characters; numbers, letters, punctuation, without control or escape codes or inverse characters. When two Commodores talk to each other, they can send codes, inverse characters and special symbols in **C64** mode. **CompuServe** has special cursor control features it supports, using a system called 'Vidtex'. **HomeTerm** supports all three methods.

Many bulletin board systems - particularly those using a **CP/M** computer (or **CompuServe** for file transfers only) - use a file transfer protocol method designed and developed by Ward Christensen, called the *Xmodem* protocol. **HomeTerm** also supports Xmodem.

Which method you should use - ASCII, **C64**, or Vidtex - will depend on the computer at the other end of the line. You will usually be able to talk or chat, read mail and information in ASCII mode, but it is important to use the right method when moving files. You may have to experiment a bit first to get it right.

- ASCII
- C64
- Vidtex

**HomeTerm** supports all three methods.

**HomeTerm** also supports Xmodem.

**Buffer**

**HomeTerm** reserves a section of memory called a *buffer* for use when transferring files. When you send a file, as much of it as can be stored in the buffer is loaded in, then transmitted to the other computer. When the buffer is empty, it fills up again and continues doing this until the entire file is sent. When you receive a file it works in reverse; as much of the file as possible is stored in the buffer before being saved to disk, then once the buffer is empty again, it starts to fill up again. During the times the disk is being used, the computer doesn't transmit. It sends a signal to the other computer, telling it to wait until the operation is finished, and when done, sends another signal to start up again. The buffer is discussed in more detail later.

**Parity**

There are two other areas which are important but not usually critical to home use. One is *parity*; when you transmit in ASCII, a *start bit* is added to the front of the character - a zero - to tell the host system to expect an ASCII character. After the letter is sent, a parity bit follows. This is either a one or zero to make the sum of the bits in the character sent - including the parity bit - come out either odd or even. Older systems used to use parity checking to insure the transmission was correct. **HomeTerm** ignores parity, since it isn't used much on modern systems anymore.

**Stop bits**

Finally there are *stop bits*. After each character has been sent, one or two bits follow as a 'flag' to tell the receiving system that the entire character has been sent and the next bit received will be the start bit of the following character. **HomeTerm** uses one stop bit, since most systems nowadays support just one rather than two stop bits. You can't change either the no-parity or one stop bit protocol, but you won't find many systems which need or use anything else.

**USING HOMETERM;  
THE SCREENS**

After you load **HomeTerm** from the main menu, remove the program disk and place it in a safe location. Place a blank disk in one of your drives to store programs you wish to retrieve from another (or *host* computer), or a disk with files you wish to send to another computer. Your first screen is the 'interactive mode' screen; this is the screen you see when calling another system, when transferring files, when chatting online. There are only two screens in **HomeTerm**; the other is the Functions menu screen.

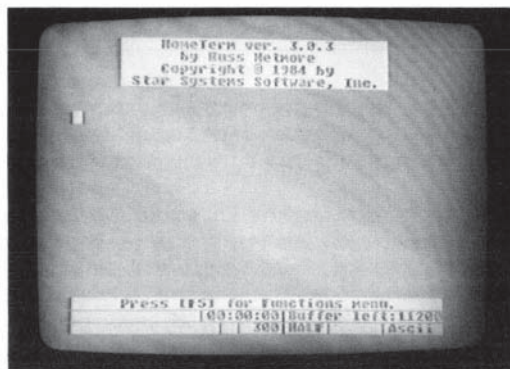


Fig. 10: Interactive HomeTerm Screen

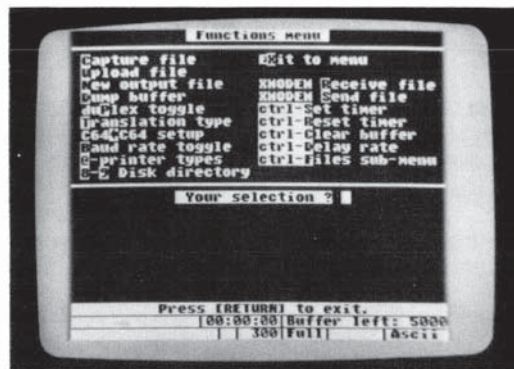


Fig. 11: HomeTerm Function Menu Screen

The bottom two lines tell you the status of your link to the other computer. You can see current size of your memory buffer, the type of file to download (program - PGM, or sequential - SEQ), the baud rate (300), the duplex (full) and the translation mode (ASCII). The status lines will also tell you what file activity you're performing and the name of the file. The center box shows a timer you can set in the functions menu screen to keep track of how long you've been online (especially useful on systems which charge for their services!).

Going to the functions menu won't disconnect you from the other computer.

Press **F5** to go to the Functions menu screen. When you're online with another computer, going to the functions menu **won't** disconnect you from the other computer. However, if you're talking to someone, it's only good manners to tell them you're leaving for a moment, since you can't talk to them from the functions screen.

Not every feature of **HomeTerm** is listed on the screen; only the most commonly used are shown, so you may have to refer to the quick reference card for such things as changing the screen color. Let's look at the features shown on the screen, one at a time, while we go through the process of 'signing on' to a bulletin board, or calling another computer.

## FIRST STEPS BEFORE PLACING A CALL

The **B** key

If you are using a modem which supports more than one baud rate, you need to make sure that you are calling at the right speed. The **B** key toggles between 300 and 1200 baud. Try it and see it change on the status line at the bottom of the screen. If your modem can transmit at 1200 baud and you know the computer at the other end can as well, then use 1200. Otherwise, 300 baud is the most common speed used. You can't change your baud rate once you have connected to another computer.

When you use 1200 baud the border lines around the status boxes disappear.

When you use 1200 baud, you'll notice that the border lines around the status boxes disappear (the border around the edit window will also disappear). This is because the lines are made of **C64** sprites and the **C64** cannot operate with sprites on screen at that speed. There's nothing wrong with your computer; the effect is only cosmetic. (This is also noticed when saving and loading files to disk and occur for the same reasons.)

You should start in ASCII mode when placing a call; you can change translation modes later when transferring files. One of the reasons for using ASCII to dial is that your modem will accept commands in ASCII, but may not take them in PET ASCII (Commodore) mode. If you can't get the modem to respond, try holding down **SHIFT** to set the output to uppercase, then re-enter your commands.

Select a duplex mode with **P**. Start out with full duplex (the default); if you have problems, you can change once you're connected. If you're in half duplex mode and you get "doubled" keystrokes on your screen, switch to full duplex. Now you're ready to make a call. Press **RETURN** to switch to the interactive screen.

## PLACING OR RECEIVING A CALL

In the interactive screen, type the commands to dial a number. If you're using an old style 'acoustic coupler' modem, or one which doesn't have 'autodial' capability, you can still use **HomeTerm**, but you'll have to dial the number manually. Your modem documentation will tell you

42 Your modem documentation will tell you how to dial.

how to dial and what you need to enter. The Hayes and other 'smart modems' use a command like this: (refer to your modem manual for details)

**ATD555-1234 ◀RETURN▶**

This says "attention modem (**AT** - tells it a command is coming), touch-tone dial (**D**; if you were using a rotary phone, you use **DP** for pulse dial) the number which follows (555-1234)". When the modem on the other end of the line answers, you may see a message on your screen, telling you that you are connected (such as 'carrier detected' or 'connected') or you may have to type something to get the other computer to recognize you (**RCP/M** systems require a **RETURN**, **Compu-Serve** needs a **CTRL + C**). When you're calling a friend, you may see nothing at all and may be able to type without needing to send other signals.

Auto-answer

If you have a modem which can answer calls (an 'auto-answer' modem), then set it to do so (this means setting the proper switch in the Hayes or giving the modem the proper command in others). With an auto-answer modem, when someone calls you, the modem will answer the phone (don't pick it up yourself!) and send out a tone for the caller to recognize. You may see a message saying you are connected, if your modem can send such prompts to your screen. Consult your modem manual for more information.

## THE INTERACTIVE, OR CHAT MODE QUICK TIPS

Now that you've made connection, whatever you type is automatically transmitted to the other computer, as well as to your screen. When you're online with a bulletin board or electronic database, you should end each entry with a **RETURN**. When you're talking back and forth with a friend, you should end each line or sentence with something like '**GA**' for 'go ahead' and three periods (...) for 'more to come', so that they know you're finished and can respond. Wait until you see their end-of-message sign ('**GA**') before you begin typing your own reply. Another way to signify who's talking (especially when saving the conversation to a disk file for later reading) is for one of you to use **CTRL + I** (tab) before starting your line.

Screen and text colors

You can change screen and text colors in the interactive mode using **COM + F** and **COM + B** (if the screen color is black only). You can also turn the key click sound on and off with **COM + K**, toggle the edit window with **COM + E** and toggle word wrap with **COM + W**. Word wrap formats the text on the screen properly. When your text comes to the end of the screen, it breaks at the last word and continues on the line below, so the words aren't broken in the middle. This isn't always necessary or wanted—say when capturing a file. The screen will tell you what you've done. Word wrap is convenient when reading files formatted for 80 column displays.



43 If you're not the best typist in the world.

If you're not the best typist in the world, you sometimes make mistakes in your input and get the wrong response. **HomeTerm** has an edit window, toggled by **COM E**. When it's on, you see a line cut across the bottom of the screen. Everything you type appears in this window in green text, but isn't sent to the other computer or the modem until you press **RETURN**. The edit buffer can hold up to 120 characters; some systems won't accept that much text at a time without a carriage return - experiment to see what it can take.

Green was chosen because, despite how it may look on your tv set, it's the best color for visibility when you use a monochrome monitor or black and white tv. The text color of the edit window does change though when you change text color on the main screen, to maintain differentiation.

When you press **RETURN**, everything from the beginning to the end is sent, minus any trailing blanks, no matter where you placed the cursor when you pressed **RETURN**. You can use the arrow keys, **CTRL I** or the **INST/DEL** keys to edit the window before you send anything. The **SHIFT CLR/HOME** keys will clear the window. The editing feature is particularly useful in **CompuServe's 'CB'** section.

At 1200 baud, timing is very critical and the edit window clears as fast as it is sent. In order to prevent your transmission from being garbled, you will have to set a very large delay rate between characters (3,000 to 5,000). Delays are discussed below. You won't have any trouble with receiving files or communications, just sending. You may even find that characters received are dropped from time to time. This is due to hardware limitations in the C64 and you should log off and try again at 300 baud if this happens.

Material you want to save

Sometimes when you're talking online or reading messages or getting information, you see material you want to save for later. To open the buffer to begin saving what's appearing on the screen, press the **F3** key. The status line on the bottom tells you that capturing is on (and the screen border turns red). Press **F3** again turns the capture buffer off. You can start and stop saving data into the buffer any number of times before saving, as long as there's room in the buffer for it. When you want to save the buffer to a disk file, press **F5** for the function menu and the **D** to dump. **HomeTerm** will ask for a filename; you can also choose to dump the buffer to the printer rather than to disk by entering the word **PRINTER** rather than a filename, you may send the buffer contents to your printer. You may also type in the word **SCREEN** and the contents of the buffer will be sent to the screen for review. You can hold down the **CTRL** key to show down this display.

You may use these special names (**PRINTER** and **SCREEN**) when using the **Copy** command in the **FILES** submenu. This is quite convenient for reviewing text saved to disk after an on-line session.

## TRANSFERRING FILES

Talking with another computer.  
Capture and Upload.

When uploading or downloading with XMODEM protocol anything other than normal ASCII text, you will need to set the Translation type to C64.

Xmodem transfers don't work on the C64 at 1200 baud.

Before capturing or sending files, press **F5** to return to the functions menu.

If you are going to be talking with another **Commodore** computer, the arrow key beside the "1" on the keyboard will put you into the **Commodore/Commodore** mode; this changes your duplex to half and your translation mode to **C64** mode. If you are going to talk to another type of computer, press **T**; you'll be given a choice of ASCII (for most communications), **Commodore** (for PETASCII and **Commodore** files) and Vidtex (for **CompuServe**). If you don't know which to use, choose ASCII. You can always change later.

Capture a file is the normal way to receive (capture, or download) and **Upload** to send (upload) a file. You will be asked for the filename; if you're using more than one drive, specify the drive number, for example; TEST,9. You can also ignore uppercase in the filename, so test,8 is treated like TEST,8 without problems by **HomeTerm**. The program assumes you mean "8" if you don't specify a drive. If the file you intend to send isn't on disk, you'll get an error message. Press any key to continue. You can get a disk directory by pressing the numbers eight or nine.

When you are talking with a CP/M or RCP/M system, or any system which uses the Christensen (Xmodem) protocol (such as **CompuServe** for file transfers; often listed on the system's opening screens), you use **Receive** and **Send** files, rather than Capture and Upload. In both cases, you can simply press **RETURN** when asked for a filename and cancel the operation before it gets started. To begin sending or receiving a file, press **RETURN** to return to the interactive mode and then press **F7** to initiate the process. S and R automatically set the correct duplex and translation modes for correct transfer; you don't need to set them manually. When uploading or downloading with **Xmodem** protocol anything other than normal **ASCII** text, you will need to set the Translation type to **C64**.

The best way to do this is to answer any on-line questions that the other system requires **before** switching translation type. If you do not, and type to another computer that isn't also a **C64**, it may not understand what you are typing. When the other computer indicates that it is ready to send or receive, switch translation type just before pressing **F7** to commence transfer.

Similarly, once the **Xmodem** transfer is completed, switch back to **ASCII** or **Vidtex** immediately.

Due to hardware limitations, Xmodem transfers don't work on the **C64** at 1200 baud; you'll have to use 300 baud for moving these files.

Using the Christensen Xmodem protocols, which breaks a file into 'records' for transmission, the receiver waits 10 seconds for the first byte of a record being sent or one second between each character in a record. If nothing is received in this time period, the system aborts the procedure *after* retrying ten (10) times. The sender has only one time-out; when nothing has been received in acknowledgement for one minute.

Sometimes during a transfer of a file, you need to quit. To do this, press the **RUN/STOP** key. This usually works, but it assumes the other system can recognize the cancel signal - no problem if you're talking to another **HomeTerm** user. Some systems which use the Xmodem protocol **can't** recognize the cancel, so you have to wait it out until the remote 'times-out' or the transfer is complete.

Before you send a file, you have to make sure you have the translation mode (**T** and **A**) set properly. In ASCII and Vidtex modes, there are several special key combinations to give you special characters or commands (see the reference card). Once you begin to send or receive a file, you will see your data presented on the screen as it moves between computer and modem. Once a file has been sent, you can clear the buffer in preparation for more transfers (**CTRL + C**). You cannot send or receive more with an intact buffer.

In Vidtex mode, true cursor control is implemented, but you must go into the **CompuServe** **DEFAULT** program and choose the terminal type of 'VIDTEX' with a 40 character by 21 line screen in order to use it properly. Vidtex has clear screen and cursor position features not used in other systems. This is described in more detail, along with the **DEFAULT** program use, in your **CompuServe** manual.

If you want to print a file rather than save it to disk, give it a file name of "PRINTER" for output, so the copy goes directly to the printer. The carriage return/linefeed (**CR/LF**) combination is always sent to the modem or the device, automatically at the end of a line (EOL character).

When you capture (or receive) a file, you'll be asked if it is a program (PGM in your disk directory) file. Answer **Y** or **N**; the other format is sequential (SEQ). If you capture the file as the wrong format, you can always change it back by using the copy file routine, described below. Before you attempt to transfer your **HomeText** files, you'll have to translate them to either Term or ASCII format, using the **HomeTrans** file transfer program provided.

## DISK FEATURES

The 'mini-DOS' function.

You've already seen that the numbers eight or nine produce a directory of that drive, if connected. There are more disk related features available in **HomeTerm** - there is a 'mini-DOS' func-

tion which allows you to perform the most important DOS features without leaving **HomeTerm** or going offline!

Press **CTRL F** for the files sub-menu. It has several functions to allow you to manage your disks and files properly; copy, delete and rename files, get a directory, initialize, validate and format a disk. These features are all explained in your Commodore 1541 manual; consult it for more information.

### The capture buffer.

Copy uses the capture buffer to copy files. You will be asked if the program can use the entire buffer; if you answer '**N**', the program will use only the available free memory, which means more disk swaps with one drive (the routine needs at least 1024 bytes of buffer space to operate). You can also copy a file to the printer by calling the destination **PRINTER** or to the screen by calling the destination file **SCREEN**. Use **CTRL** to pause screen copies.


Copy asks you if the destination file is a program file (**Y** or **N**). If you say **N**, the destination file will become a **SEQ** (sequential) type file once copied. This allows you to change the format of a file if you made a mistake in specifying the type when downloading.

### Rename

With rename, you can specify any valid drive for the first name, but the new name cannot have a drive specification (the file is assumed to be on the same disk). Wildcards are allowed.

Make sure you don't have your program disk in the drive when you press **F** to format the disk!

One precaution: make sure you don't have your program or data disk in the drive when you press **F** to format the disk! If you choose a selection but change your mind, press **RETURN** instead of answering with a filename and the command will be cancelled.

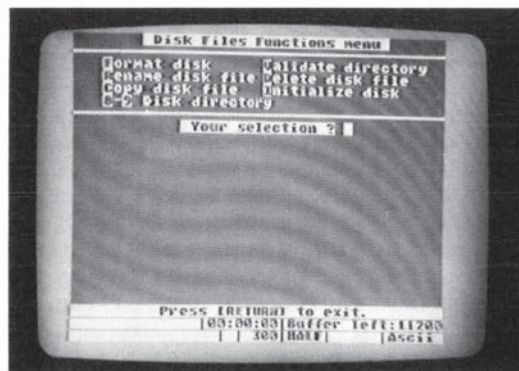

Disk Files Function Menu

## SPECIAL FEATURES

### The timer.

You have noticed several other commands on the functions menu so far we haven't discussed. The first is the timer; set with **CTRL S**. The timer is a 24 hour real time clock. You can enter the current time and it will keep the clock running on the status line of the screen. You can reset the time to 00:00:00 by pressing **CTRL R**. This is useful to keep track of the time you've spent online when using a system with either a time limit or a fee for usage. You must turn the timer on to get it working after you've set it; press the **COM T** keys to toggle the timer on or off (in either screen).

### The buffer.

When you capture data using the **F3** key, or send or receive a file using a function menu choice, you use the buffer. There is only one buffer and in order to use it for other purposes, you must clear it; press **CTRL C**. You can also simply load or receive a file but change your mind and clear the buffer without either saving it or sending it. The buffer is usually cleared automatically after a file transfer.

### Add delays.

Sometimes you need to add delays between characters when transmitting a file, so that the other computer has enough time to fetch and display the character then get ready for the next character being transmitted, without losing any data. **CTRL D** sets the delay in increments of 50 milliseconds. Just type in the number you need to add to each line. Usually between ten and 50 delay increments are sufficient; delays greater than fifty are seldom necessary unless you are transmitting at 1200 baud, when 3,000 to 5,000 may be necessary, due to hardware limitations.

## MACRO COMMANDS

### QUICK TIPS

Macros are simple keystrokes which allow you to transmit several commands or a long string of characters (up to 70 characters total in each) without having to type the entire line in each time. You can best use them to 'automate' your dialing and log-on sequence to such systems as **CompuServe**, where a long keying process is involved. You can have up to ten macros at a time and store them to disk, along with several other parameters, in a special configuration file.

Macros are transmitted in the interactive mode by pressing the Commodore key (**COM**) and the number of the macro - zero through nine (**0-9**). To abort a macro, press any key while in operation (you can tell a macro is still working because the screen itself changes to green). To get a list of your active macros, press **COM M** in either screen.

### Macros.

Macros are defined in the function menu by pressing **M**. You will be shown the current list and asked which one you wish to change. If you have entered data for that macro already, you will get an edit window which allows you to change a few characters if necessary, without having to change the entire line. Control characters appear in inverse ASCII.

### Current list.

### To write a macro.

To write a macro, you simply type in the characters and commands you want to send, ending the sequence with a **RETURN**. A carriage return and line feed (**CR/LF**) is sent at the end of each macro

A carriage return is always sent after a macro is completed, except when the last character in the macro is the **ESC** key.

unless the last character is the escape character (**CTRL+D**).

There are several special characters used in macros. These are:

1. **CTRL + C** Toggles the capture buffer open and closed.
2. **CTRL + N** Sends the end-of-line character.
3. **CTRL + P** Pauses for two seconds before continuing.
4. **CTRL + U** "Use" the macro whose number follows immediately. This is like the "GOTO" command in BASIC; it allows you to combine several macros together. Using **CTRL + U**, you can link several macros together into a 'giant' macro with many more commands than one alone would permit; almost 700 characters can be combined in one mega-macro this way.
5. **CTRL + W** Wait for the next character you specify to appear from the host. If the character hasn't appeared in 30 seconds, the macro is aborted.
6. **CTRL + ESC** Makes the next character 'verbatim'; necessary to transmit control codes rather than interpreting them as a command.

Here's an example of a macro used to call up and log on to **CompuServe**. The `` character means 'CTRL' and the square brackets —[ ]— aren't typed in—they're only shown here to differentiate between control codes and other characters.

```
ATD555-1234[^P] [^M] [^W] T [^P] [ESC] [^C] [^W]: 77770,111 [^M] [^W] : FREE-DEMO
```

This macro breaks down as follows:

1. ATD555-1234[^P] [^M] Call the number 555-1234 and pause for two seconds to allow the modem to catch up to the input stream.
2. [^W] T [^P] Wait for the 'T' in the '**CONNECT**' prompt from the modem then pause again while the sign on message is being displayed.
3. [ESC] [^C] Send a **CONTROL C** so that **CompuServe** can acknowledge the call. The ESC tells **HomeTerm** that the **CONTROL C** is to be transmitted to **CompuServe**, not taken as a command.
4. [^W]: 77770,111 waits for the final ':' in the **CompuServe** 'USER ID:' prompt, then sends the users ID code, followed by the end-of-line character.
5. [^W]: FREE-DEMO waits for the final ':' character in **CompuServe's** 'PASSWORD:' prompt, then sends the password.

## 49 CONFIGURATION FILES

You can save your screen and text color choices to disk, along with your current list of macros, the current baud rate, key click, duplex mode and translation type as a configuration file, while in the function menu. This is done by pressing **CTRL W**. The default configuration file which comes with the program is called 'HOMETERM.SET'. To save your own default file under that name (replacing the one on the program disk), press **CTRL W**. The default configuration file is always the one which boots up with the initial program load.

To save a differently named configuration file, press **CTRL N**. You will be asked to give the filename. You can store as many as you want, as long as you give them each different names and you have enough disk space.

To load a different configuration than the default once you're in **HomeTerm**, press **CTRL L**. You will be asked for the name of the file to load. Using different configuration files, you can save several different sets of macros for use with different online systems.

The configuration file commands are not shown on the function menu screen. They only work in the function menu, not in the online or interactive screen mode.

## SIGNING OFF

Once you've signed on to a system, you'll want to explore it, test what it has to offer, download (capture) files or programs, read and leave messages or electronic mail (often called Email)—whatever the system allows (most bulletin boards and databases have menus for you to choose from). When you're finished, you'll have to sign off. Usually the system has a menu choice for quitting; sometimes it's a single word like 'BYE' or 'QUIT'. Check with the system functions menu before you continue, so you know ahead of time how to leave properly.

If your modem is still hooked up, you will need to disconnect it (sometimes manually) or place it 'on the hook' so that your phone line is clear again and the modem doesn't answer when someone calls! The Hayes Smartmodem uses "ATH" as the 'hang up' command. Check your modem manual for details.

## HOMETRANS

### FILE TRANSFER AND CONVERSION

To convert a file from one format to the other.

There are three basic file types used by **HomePak**; **ASCII**-straight character files, useful for transmission to other brands of computers; **HomeTerm** files using 'PET ASCII' format, for transmitting to other **Commodore** computers (loadable by **Paperclip** by pressing **CTRL J** in that program) and **HomeText** files created by the word processing portion of **HomePak**. These three are not generally compatible with each other or other programs in this package.

To convert a file from one format to the other, use the **HomeTrans** program supplied with the disk. To load the program, type **LOAD "TRANSFER",8,1** from **BASIC** and the program will load automatically. You may also load the transfer program from the main **HomePak** menu by typing **"T"** after a conversion you will be returned to the menu.

The transfer program is entirely screen driven; place your disk with the file(s) to be converted in the disk drive and answer with the name of the file to be converted. Then you are shown a list of the three file types. Give the file's original type, the new name for the translated file and the new file type. The file is converted under the new name and both now exist on your disk. You can continue to translate files until you answer **N** to the question about continuing.

### PRG AND SEQ FILES

In case you download a file in **HomeTerm** and define it as the wrong type (SEQ instead of PRG or vice versa), you can change it back to the correct type by using the Copy file feature in the disk file sub-menu in **HomeTerm**. This is explained in the chapter on **HomeTerm** and is not the same as translating a file with **HomeTrans**.



# C64 HOMETERM

## QUICK REFERENCE GUIDE

In the interactive screen mode:

To change the screen color:

**COM + F**

To change text color:

**COM + B** (only when screen is black)

To toggle the key click:

**COM + K**

To toggle the Edit window:

**COM + E**

To toggle the word-wrap feature:

**COM + W**

To toggle the real time clock on/off:

**COM + T**

function menu screen)

### MACROS:

To initiate (transmit) a macro:

**COM + 0** through **9**

To see the list of macros:

**COM + M**

### FUNCTION KEYS:

To toggle capture buffer on/off:

**F3** (if no other file transfer mode has been selected)

To go to the function menu:

**F5**

To begin a file transfer operation:

**F7**

### SPECIAL KEYS:

To lock the keyboard in uppercase only:

**SHIFT LOCK**

To release the shift lock:

**SHIFT LOCK** again

To tab every eight spaces:

**CTRL + I**

To ring the bell on the host computer:

**CTRL + G** (ASCII and Vidtex modes only)

To clear the screen (form feed):

**CTRL + L** (ASCII and Vidtex modes only)

To send a left curly brace ({}):

**CTRL + ;** (ASCII and Vidtex modes only)

To send a right curly brace (}):

**CTRL + ◀** (ASCII and Vidtex modes only)

To send a reverse apostrophe:

**CTRL + ,** (ASCII and Vidtex modes only)

To send an underscore ( \_ ) character:

**left arrow** (beside "I" key)

### IN THE FUNCTION MENU:

To toggle computer and modem for Commodore to Commodore mode:

**◀-**

To toggle between 300 and 1200 baud:

**B**

To prepare to receive a Commodore or ASCII file:

**C**

To dump present buffer to device and filename:

**D**

To change the current output filename:  
**N**  
 To toggle between half and full duplex:  
**P**  
 To prepare to receive an Xmodem file:  
**R**  
 To prepare to send an Xmodem file:  
**S**  
 To select file transfer translation mode:  
**T**  
 To prepare to send an Commodore or ASCII file:  
**U**  
 To exit to the **HomePak** menu:  
**X**  
 To clear the buffer:  
**CTRL + C**  
 To set the output file delay rate:  
**CTRL + D** (each increment is 50 ms)  
 To select the disk file menu:  
**CTRL + F**  
 To load a configuration file:  
**CTRL + L**  
 To change or edit macros:  
**M**

To write a configuration file:  
**CTRL + N** (you give the filename;  
 screen parameters and macros saved)  
 To reset the timer clock to all zeroes:  
**CTRL + R**  
 To set the timer clock:  
**CTRL + S** (you must enter all three  
 time fields)  
 To write the default configuration file:  
**CTRL + W** (writes **HOMETERM.SET,8**)

### IN THE DISK FILES FUNCTION MENU:

To copy a single file:  
**C**  
 To delete a file from disk:  
**D**  
 To format a disk:  
**F**  
 To initialize a disk:  
**I**  
 To rename a file:  
**R**  
 To validate the directory:  
**V**  
 To get a disk directory:  
**8-9**

### MACRO COMMANDS:

To invoke (transmit) a macro:  
**COM + 0** through **9** (in interactive  
 screen mode)  
 To list macros:  
**COM + M** (either mode)  
 To edit or change macros:  
**M** (function menu mode)  
**Commands or characters within macros:**  
 To toggle buffer open/closed:  
**CTRL + C**  
 To send a carriage-return (Return)  
 character:  
**CTRL + N**  
 To pause two seconds:  
**CTRL + P**  
 To use another macro:  
**CTRL + U + 0** through **9**  
 To wait for the next character before  
 proceeding:  
**CTRL + W + character**  
 To make the next character verbatim:  
**ESC (CTRL + [)**

# APPENDIX "A"

## COPYING A DISKETTE WITH A SINGLE DRIVE

Use the program **backup64** supplied.

As mentioned in the main part of this manual, it is very important to both make back-ups of your Program disk and any data disks with which you are working. Owners of 1541 disk drives should use the program **backup64** supplied on your Program diskette.

Reset the computer (turn it off and then back on again).  
Put the Program diskette in the drive and close the door.  
Load the back-up program as follows:  
Type: **load "backup64,"8**  
Press: **RETURN**

The program will ask you for a name and an ID code. Any name up to 16 characters long may be used, and any 2 characters may be used for the ID code. Use a name that will help you identify the nature of the contents of the disk. For safety, if it doesn't already have one, put a write-protect tab on the original diskette. This will prevent any difficulty that might be caused if you accidentally confuse the diskettes during copying.

The program will format the destination disk (the blank one you just put in). It will then request you to put in the source (original) diskette into the drive. The program will read as much of the diskette contents into memory as possible, then ask that you exchange the diskette with the destination diskette. The information stored in the computer is put on the new diskette, and the program will repeat the process until all information on the original diskette has been transferred to the new disk. You now have two copies of the diskette.

Take care of your diskettes.

Take care of your diskettes. If one should become damaged, all information (your Master Program or files) stored on that diskette will be lost. Make backup copies of all diskettes frequently. One day you will be glad you did!

Make backup copies of all diskettes frequently.

You will notice that your program diskette also contains a program called **backup64k**. This is similar to **backup64** except that it is intended to be used if you **do not** have any devices (such as the **BusCard II**) plugged into your **C64** while *using the copy program*.

The fastest copies are possible with **backup64**.

The difference between these programs is that the **backup64k** version uses ALL of the RAM in the computer and thus copies are made somewhat more quickly. If certain peripheral devices are attached they also use some of the memory space and thus problems can arise when doing

Please note that it is *only* when using backup64 that there is a restriction on devices attached.

a disk copy. Which program to use is up to you. The fastest copies are possible with **backup64k**, but use it only if you have no other devices plugged into your **C64** when doing a backup. Please note that it is *only* when using **backup64k** that there is a restriction on having devices such as the **BusCard II** attached.

# APPENDIX "B"

## USING HOMETERM ON COMPUSERVE™ AND HOW TO USE THE COMMODORE IN- FORMATION NETWORK COMMODORE INFORMATION NETWORK (CIN)

To access the SIGS

**IMPORTANT**—It's all right to tell others your USER ID number

**NEVER** tell anyone else your private password.

To access the C64 SIG.

**GO CBM.**

With **HOMETERM**, the entire universe of **COMMODORE BBS** systems and commercial data services are just a few keystrokes away. Perhaps the largest and most widely known of these are the three "SIGs" that comprise the **COMMODORE INFORMATION NETWORK (CIN)**, located on the **CompuServe Information Service, (CIS)**. Each "SIG" or (S)pecial (I)nterest (G)roup is more than a simple BBS (Bulletin Board System). Among its many features are its powerful and versatile user forum. This features a sophisticated message transfer system and an online, real-time **CO**nferencing facility that permits over 100 users to converse simultaneously or in private with others all across the nation. Each CIN SIG offers multiple databases with over 1,000 public domain files available for downloading at no extra charge. Membership in each CIN SIG is available to anyone with a **CompuServe ID**, with no additional charges beyond the normal connect rates.

To access the SIGS just sign on to **CompuServe** by following the log-on directions provided with your **CIS** starter kit. (These are available at most major computer retailers.) After dialing in, **CompuServe** will prompt you to enter your **USER ID**:. This ID, commonly referred to as a **PPN**, is a 2-part number that looks like 77777,7777. Next enter the password provided with your starter kit. Don't worry if you can't see the password as you type it in. This is done for security reasons so anyone looking over your shoulder can't access your account.

**IMPORTANT** - It's perfectly all right to tell others your USER ID number, also known as PPN. In fact, they need to know this number to send you any **EMAIL (Electronic Mail)** or other messages on the system. Think of this number as just like your street address for postal mail. **NEVER, NEVER** tell anyone else your private password. This is just like the key to your house. Never give it to strangers!

Once online with **CompuServe**, you will be "positioned" at the "TOP" page of the **VIDEOTEXT** service. **CIS** is structured into a "paged" format where each "page" is denoted with a 2 or 3 letter abbreviation and a number. You may navigate around the system by stepping thru the menu selections until you arrive at the page with the information or service you desire, or you may go directly to any page as long as you know the page number. To access the **C64 SIG**, you may start on page **CIS-1** and step thru the various submenus until you get to page **CBM-1** or you may save time and money by jumping there directly with the command: **GO CBM** from any other page in the system.

It's a good idea to save this text to disk or printer.

The first time you access each CIN SIG, you will be greeted by the NEW MEMBER MENU. By selecting the appropriate menu choice, you can read a brief description about the purposes and features of the SIG, list out a LONG file of SIG instructions, (it's a good idea to open the capture buffer on **HomeTerm** and then save this text to disk or printer), enter as a non-member, or Sign up for SIG membership. There are no additional fees for membership, but only members may use all the features of the SIG. To join, you must enter your **FULL, REAL NAME** when prompted. Use of pseudonyms (handles) or first names only is not permitted. The rest of the Signup process is automatic and takes just a few seconds. You need only go thru this Signup process once. On future visits, members pass directly into the message section of the SIG.

Before we examine the different features of the SIG program, a discussion of the two operating modes available is in order. Each CIN SIG can be accessed in "command mode" or "menu mode". In MENU mode, the user may select a function by number from an abbreviated menu of choices or type in the actual command itself. In COMMAND mode, the system simply uses the single word prompt "FUNCTION:" and expects the user to type in the proper command. In either mode, you must terminate your input with the ◀RETURN▶ key. New users generally use MENU mode while they learn the system commands, then change to COMMAND mode to save time and connect dollars after a few weeks of practice. Don't be afraid to experiment and abandon MENUS for the more efficient COMMAND mode. If you can't remember the proper command or the exact command format when prompted, simply enter a question mark "?" or the word "HELP" and the system will display a list of valid commands. In many instances, you may obtain additional help on a SPECIFIC command by typing: ?xxx, where "xxx" is the command in question. A system as powerful and complex as the SIG program on **CompuServe**, by its very nature, accepts a large number of system commands in a variety of different command formats. To complicate this situation, CIS is constantly expanding and refining these commands. As a result, system documentation is often outdated faster than it can be printed. In some cases, the commands have just been renamed and the system will accept both the old and new names. Often, old commands are no longer documented online, but are still valid. As new commands are added, the online help is updated as soon as possible, but as this is not under the control of the Sysops, the updates are 'irregular'. In other words, if the system doesn't respond exactly as you would expect, it may not be your fault! The information and programs available in each CIN SIG are further divided into individual section topics. To see a list of the available section names, type the command: **SN** (or **SB** after Nov., 84)

If you can't remember the proper command simply enter a question mark "?" or the word "HELP".

## "Quick Scan"

Additional information for each section # is available by typing: **X#** (where #=0 to 9). While accessing the message sections of the SIG, you may scan the message headers or read the full text of the message. When scanning, the header will display the name of the **SENDER**, the **RECIPIENT**, the **SUBJECT** of the message, and the date and time it was written. You may scan message headers in forward or reverse chronological order, by specific subject threads, and even scan and mark individual messages for later reading. You may choose a "Quick Scan" option which shows the subject information only. For a detailed description of all the scanning command variations, type: ? **S** (for scanning) or ? **QS** (quick scanning) at the **FUNCTION:** prompt. There are similar command variations for reading messages. You may elect to read messages in forward or reverse order, by subject threads, by **WRITER**, by **ADDRESSEE**, only specifically marked messages, or only **NEW** messages written since your last visit. To view the online instructions for reading messages, type: ? **R** (at the **FUNCTION:** prompt). After reading a message, you may immediately elect to **(RE)ply** to the writer, and the system will automatically address the reply for you. When reading a message thread, you may choose to **RE-READ (RA)** a message or even back up a step and **READ** the **PREVIOUS** message (**RP**).

As you might expect, to see a list of all valid reply options, type a "?" when prompted for a response. To initiate a new message to another member or sysop, use the "**L**" command. You will be prompted for a **SUBJECT** (23 chars. max) and an **ADDRESSEE**. If you wish the system to automatically notify the other party of a waiting message when they next enter that SIG, you must include their PPN when prompted for a name. The only exception to this is a message to the head sysop. He will be flagged to any message that includes his PPN -or- the name "**SYSOP**". You cannot send a private message to another SIG member, but you may send a private message to the primary sysop if you address it **TO:"\*SYSOP"**. (with the \* but without the ").

When reading or scanning messages, you may limit yourself to a specific section by typing the command: **SS#** (where #=0-9), **BEFORE** reading or scanning. To access all available sections, use the command: **SSALL**.

## (CO)nferencing channels

From the **FUNCTION:** or **MAIN SIG MENU** level, you may enter the SIG **(CO)nferencing** channels by typing: **CO** (or **CB**). The system will display a short text prepared by the sysop which may include a schedule of upcoming conferences or other timely information then display your **NAME** or **HANDLE** as it will be seen by others and indicate which of the 31 channels are in use. Unlike the **CHAT** feature of most private BBS's, the **CO** channels can accom-

For complete discussion of the CO commands read the helpfiles in the TELECOM-MUNICATIONS data library.

Downloading data bases.

moderate dozens of simultaneous users. Conferencing is surprisingly simple once you get the hang of it, as long as you keep a few simple rules in mind.

1-You may "converse" in lines up to 80 characters long simply by typing your words in from the keyboard, but NOTHING is transmitted to others UNTIL YOU HIT THE ◀RETURN▶ KEY. Since others will be "talking" while you are composing your words, it's HIGHLY recommended that you use the **EDIT WINDOW** feature of **HOMETERM** while in CO.

2-The system will consider every line you type as "conversation" EXCEPT FOR LINES THAT BEGIN WITH A SLASH (/) IN COLUMN ONE. A SLASH IN COLUMN ONE DENOTES A COMMAND TO THE SYSTEM. For example, to see a list of valid CO commands, type: **/HELP** while in CO. To exit CO and return to the SIG, type: **/EXIT** (or **CTRL C**). For a more complete discussion of the CO commands, we suggest you read the helpfiles in the TELECOM-MUNICATIONS data library.

The final (and most popular) feature of the CIN SIGS are the downloading databases (also called XA's or data libraries). Like the message sections, the databases are divided by subject, roughly corresponding to message sections. For example, let's say Section 2 was named TELECOMMUNICATIONS. Thus, any questions to the SYSOP about **HOMETERM** would be left in Section 2 of the message area, and any programs and helpfiles relating to terminal software, BBS's, etc., would be found in XA-2 (soon to be called DL-2). To enter this database, type: **XA2** (or **DL2**) at the **FUNCTION:** or **MAIN SIG MENU** prompt. The databases include text files and program listings in many forms. **HELP** files will always be found in XAO of the Commodore SIGs.

**HOMETERM** will allow you to **DOWNLOAD** or retrieve MOST of these files using the **XMODEM** or **CAPTURE BUFFER** protocols.

As previously noted, this section of the **SIG** program is being revised as this text was being written. Among the features of the database that are expected to remain, are the powerful searching and browsing commands. When a text-file or program is submitted to the databases, the **UPLOADER** is required to supply a short description of the file and a few meaningful keywords. Other members accessing the database may then view these with the **(S)can** and **(BRO)wse** commands. To see a directory of just filenames, use the **(S)can** command. The **(BRO)wse** command displays each file's description and **KEYWORDS** and gives you the option of reading the file, downloading it, or continuing to the next entry. The **(S)can** and **(BRO)wse** commands support additional parameters or "switches" which permit the more experienced users to search the



database files in many ways. For example, to (S)can for all files with the extender .DOC, you could enter the command: **S\*.DOC**.

Another variation of the **BROW**se command used in conjunction with the /**KEYWORD** "switch" might be used to display the descriptions of only those files denoted with the keyword "**XMODEM**" like: **BRO \*.\* /KEY:XMODEM**. A complete discussion of all the possible variations and uses of these commands is beyond the scope of this text. Once again, we recommend you read the online documentation for any specific database command, by typing: ? **xxx** (where **xxx**= command) or "? **ALL**" (for help on all commands).

The chief reason for maintaining a program database is to support file transfers. When a program is sent from the host computer (**CompuServe**) to your **C64**, the process is named **DOWNLOADING**. When you send a file from your **C64** to the host computer (**CompuServe**), the process is called **UPLOADING**. There are many different methods for **UPLOADING** and **DOWNLOADING**, but they can be broken down into two basic types of transfer methods, "**SMART**" and "**DUMB**" transfers. In both methods, one computer sends a stream of data to the other computer. When this is done via modems over local or long distance phone lines, line "noise" or other factors might affect this data stream, possibly dropping or changing the value of a single data byte. Depending on the nature of the file being transferred, such a "glitch" may be in**SIG**nificant, or a major problem. In a **DUMB** transfer, the sending computer simply transmits the data stream and expects the receiving computer to take the responsibility (and possible risk of inaccurate data) for displaying and or storing the incoming characters. This method is usually used for sending text files and is probably 95-99.9% safe.

The (**U**)pload and (**C**)apture functions of **HOMETERM** perform such a **DUMB** transfer and should be used for sending and receiving files from the **SIGS** whenever possible. We'll discuss the exact procedure to do this in a moment. Sometimes, especially when transferring a **BINARY FILE** where 1 garbled character may prevent a program from running correctly, you **MUST** ensure that every data byte is received accurately. In such cases, the sending computer will transmit a file in pieces or "blocks". The sending system uses an algorithm to calculate a verifying code for a specific block of data. The sending system transmits that block of data and the receiving computer will use the same algorithm or formula to calculate the verifying code. If the codes match, the block is assumed to have been transmitted accurately, and the sender then repeats this process with the next block of data. If the codes do **NOT** match, the sender will attempt to resend the same block. As you might guess, this second process with all the verification checks takes considerably longer to complete a file transfer, sometimes increasing the

To DOWNLOAD a file.

transfer time by a factor of 2-4 times longer. Compounding the problem is the fact that there are many different algorithms or protocols used to verify accuracy. Obviously, both ends must be using the same protocol if this process is to work.

The **XMODEM** protocol is one of the most commonly used protocols in the microcomputer world. It features a verifying algorithm that offers a reasonable compromise between accuracy and speed. The protocol was created by Ward Christensen for use on another computer system but has been adapted to run on your **C64** in **HOMETERM**. It was recently implemented by **CompuServe** for use in the SIGS as an alternative to **CompuServe's** own proprietary protocols.

To DOWNLOAD a file FROM the SIG to your computer, you must use the **Scan** or **BROWse** commands to find the EXACT FILENAME. FIRST—note the 3 letter extension. If the extender is **.IMG**, the file should **not** be DOWNLOADED with **HOMETERM**. Files with this extender have been stored in the databases in a special format that requires they be DOWNLOADED by a terminal program that supports **CompuServe's** proprietary B-protocol. If the extender is **.BIN**, use **HOMETERM** and choose **"R"** for XMODEM-RECEIVE on **HOMETERM's** function menu. For any other extender, the file is assumed to be an ASCII text file. For these files, select **"C"** for CAPTURE on the **HOMETERM** menu. When you select **"R"** or **"C"** on the **HOMETERM** menu, you will be prompted for a filename. This is the name you wish to save the file under on your **C64** disk. It does not have to be the same name used on **CompuServe**. Once **HOMETERM** is set up, you must tell **CompuServe** to send you the file. Use the **DOW** command with the exact filename as: **DOW FILE.BIN** or **DOW SIG-CO.DOC** and press **◀RETURN▶**. **CompuServe** will then display 4 choices of transfer protocols:

- 1-A Protocol
- 2-B Protocol
- 3-XMODEM Protocol
- 4-DC2/DC4 Protocol

**HOMETERM** only supports selections 3 and 4. Pick **DC2/DC4** when using the **"C"**apture feature of **HOMETERM**. This corresponds to a **"DUMB"** file transfer. You **MUST** use **XMODEM** if the **CompuServe** filename uses the extender **.BIN**. You **MAY** use **XMODEM** instead of **DC2/DC4** (**"C"**apture) for the other files if you desire the added security of knowing that **EVERY BYTE** in the file was verified as it was transferred. For detailed program listing, this may be desirable, but for text files (i.e.—a product review), the extra time required for the error checking (and hence, the extra **COST**) is hard to justify. If you select **XMODEM**, you will be asked for a 7 or 8

Sending a file from your C64 to CompuServe.

bit transfer. Select 8 bit for .BIN files, 7 bit for text files. **CompuServe** will then tell you that **XMODEM** has started and you should hit your computer's **F7** key and sit back. When you select **DC2/DC4** (which is **CompuServe's** fancy name for DUMB transfers), the file will begin to scroll IMMEDIATELY, so be ready to press your **F7** key instantly. In fact, most people hit **F7** to open the capture buffer BEFORE hitting ◀RETURN▶ to start **CompuServe**.

If you are sending a file from your C64 to **CompuServe**, the process is almost identical. If your file is all text, without any non-ASCII characters use "U"pload with **HOMETERM**. If your program is a binary file or TOKENIZED BASIC, you should use **XMODEM-SEND** on **HOMETERM**. **CompuServe** only accepts 6 letter filenames and a 3 letter extender. To prepare **CompuServe** to accept your UPLOAD, use the command: **UPL filename.ext**.

\*\*\*IMPORTANT\*\*\*

\*\*\*IMPORTANT\*\*\*

WHEN YOU CHOOSE A FILENAME FOR **COMPUSERVE**, THE EXTENDER IS VERY IMPORTANT!! IF YOU ARE USING **XMODEM** TO TRANSMIT THE FILE WITH **HOMETERM**, YOU MUST USE THE EXTENDER ".BIN" FOR ALL BINARY FILES, OR FILES CONTAINING INVERSE VIDEO. YOU SHOULD ALWAYS SELECT 8-BIT TRANSFERS FOR THESE. NEVER USE ".IMG".

When sending files with the "U"pload feature of **HOMETERM**, choose **DC2/DC4** as the protocol. You don't require to be prompted for each line. Sometimes when **CompuServe** is very busy, **HOMETERM's** "U"pload stream will overwhelm the system and send data faster than **CIS** can accept it. The system literally "chokes". We suggest you set a delay speed of around 500 ms. when using "U"pload to send text to **CompuServe**.

A service by enthusiasts for enthusiasts.

That then is a brief outline on how to use the largest C64 oriented "BBS" in North America, the **C64 Information Network** on **CompuServe**. This is a service run by enthusiasts for enthusiasts. From beginners to old-hands, the SIG is open to all. All it requires is an interest in things related to the **C64**. See you there!

Ron Luks  
October, 1984

For  
**Technical  
Support**  
or  
**Batteries  
Included  
Product  
Information**  
please call



**BATTERIES INCLUDED**

"The Energized Software Company!"

(416)  
**881-9816**

30 Mural Street Richmond Hill Ontario Canada L4B 1B5













BATTERIES INCLUDED



TM

# HomePak

BY RUSS WETMORE

FOR  
ATARI™

# HomePak™

Atari™ Edition

Program design by

**RUSS WETMORE**

for Star Systems Software, Inc.

Written by Russ Wetmore

Manual written by Ian Chadwick

Package design by MML & Associates Inc.

## NOTICE OF REGISTERED TRADEMARK

In this manual reference is made to Atari  
which is a registered trademark of Atari, Corporation

Copyright© Second Edition, January 1985 by Batteries Included  
All Rights Reserved

**BATTERIES INCLUDED**



*"The Energized Software Company!"*

Telex 06-218290

PRINTED IN CANADA  
JANUARY 1985

30 Mural St. Richmond Hill, Ontario L4B 1B5 Canada

# Table of Contents

<b>Chapter 1 Introduction</b> .....	1
<b>Chapter 2 Getting Started</b> .....	3
Powering Up .....	4
<b>Chapter 3 HomeText</b> .....	6
Moving Around the Text .....	8
Search and Replace .....	11
Loading and Saving Files .....	11
Print Preview .....	13
The Printer Commands .....	14
Headers and Footers.....	18
Merging Files from HomeFind .....	19
Configuration Files and Defaults.....	21
HomeText Quick Reference Guide .....	23

<b>Chapter 4 HomeFind</b> .....	25
Entering Data .....	28
Changes and Corrections .....	30
Making Information Requests.....	32
Printing Your Requests.....	34
Merge Files.....	37
Quick Reference Guide HomeFind .....	38
<b>Chapter 5 HomeTerm</b> .....	39
Basic Technicalities .....	40
Placing or Receiving a Call .....	44
Disk Features .....	47
Macro Commands.....	49
Configuration Files.....	50
HomeTerm Quick Reference Guide .....	53
<b>Appendix 'A' CompuServe</b> .....	55

## HOMEPAK USER'S MANUAL

This manual and the computer programs on the accompanying floppy disks which are described by this manual are copyrighted and contain proprietary information belonging to Batteries Included.

This manual and the computer programs on the accompanying floppy disks which are described by this manual are copyrighted and contain proprietary information belonging to Batteries Included and Star Systems Software.

The accompanying floppy disks may not be duplicated, in whole or in part, for any purpose. No copies of the floppy disks or this manual or the listings of the programs on the floppy disks may be sold or given to any person or other entity. Notwithstanding the above, the accompanying disks may be duplicated for the sole use of the original purchaser. All rights reserved.

**BATTERIES INCLUDED**, or any dealer or distributor distributing this product, makes **NO WARRANTY, EXPRESS OR IMPLIED**, with respect to this manual, the related floppy disk(s) and any other related items, their quality, performance, merchantability, or fitness for any particular use. It is solely the purchaser's responsibility to determine their suitability for any particular purpose.

**BATTERIES INCLUDED**, will in no event be held liable for direct, indirect or incidental damages resulting from any defect or omission in this manual, the floppy disk(s), or other related items and processes, including but not limited to any interruption of services, loss of business or anticipatory profit, or other consequential damages.

**THIS STATEMENT OF LIMITED LIABILITY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. BATTERIES INCLUDED** neither assumes nor authorizes any other person to assume for it any other warranty or liability in connection with the sale of its products.

This manual and the computer programs on the accompanying floppy disk(s) which are described by this manual are copyrighted and contain proprietary information belonging to **BATTERIES INCLUDED**.

## LIMITATIONS OF WARRANTY AND LIABILITY

## PRODUCT IMPROVEMENTS

BATTERIES INCLUDED reserves the right to make corrections or improvements to this manual and to the related floppy disk(s) at any time without notice and with no responsibility to provide these changes to purchasers of earlier versions of its product.

## WARNING!

This manual and the programs contained on these disk(s) are protected by International Copyright laws. Duplications by any means is strictly forbidden and a violation of copyright laws. VIOLATORS WILL BE PROSECUTED! All rights reserved.

## TRADEMARKS CREDITS

"The following commercial products were used during the development of HomePak™:

ACTION!™

ACTION!™ Commercial Run-Time Package

MAC/65™ (SuperCart version)

BUG/65™ (Disk version)

OSS Inc., 1221 B Kentwood Avenue, San Jose, CA 95129

The Next Step™

Sierra On-Line, Sierra On-Line Building, Coarsegold, CA 93614

Atari™ Macro-Assembler

Atari Corp., 1265 Borregas Avenue, Sunnyvale, CA 94086

ACTION!™ is a trademark of Action Computer Services

MAC/65™ and BUG/65™ are trademarks of OSS, Inc.

The Next Step™ is a trademark of Sierra On-Line

Atari™ is a trademark of Atari Corp.

HomePak™, HomeText™, HomeFind™ and HomeTerm™ are trademarks of Batteries Included.

## THANKS

Special thanks go to Ron Luks for his untiring support,  
and to Joe Miller for all his technical help."

# CHAPTER 1

## INTRODUCTION

## CONGRATULATIONS!

Congratulations! You have bought three excellent programs – a word processor, database manager and a telecommunications program – for less than the price you would expect to pay for any *one* of them from anyone else! But you're not buying just run-of-the-mill software with **HomePak**; you've got yourself three of the *best* programs of their type on the market. These aren't programs which have compromised power and quality for a low price; you're going to find features and functions in this package which are equal to or better than even the most expensive programs you can buy for your computer. And **HomePak** is written by a well-known, and respected professional programmer – Russ Wetmore.

There's no need to bend your ear with a lot of hyperbole. You'll find out quickly enough exactly how good and how powerful **HomePak** is. What's more, you'll find that the **HomePak** programs are easier to use than most others which offer similar capabilities – with on screen help menus and friendly prompt messages. **HomePak** finally gives a real meaning to the over-worked term 'user friendly'.

## HOMETEXT

In **HomePak** you'll discover **HomeText**, is a word processor with all the features you need to do your personal, school and even business writing. It even allows you to 'preview' your text, seeing in graphic form how it will look on paper before you print it! **HomeText** can use information you stored with **HomeFind** and insert it into letters like the mail merge feature found in more expensive programs. You can use **HomeText** to edit files and 'chats' saved online with **HomeTerm**.

## HOMEFIND

You also get **HomeFind**; a powerful 'natural language' database which stores and retrieves data in a manner similar to the way you think, without the complexity of rigid field structures and records. This deceptively simple method of dealing with information is more flexible and easier to use than many databases found on professional and business computer systems.



## 2 HOMETERM

The third program, **HomeTerm**: a simple but full featured telecommunications program which allows you to sign onto bulletin boards and databases, load and send files, chat and record conversations easily. It works with any **Atari** modem or other brand which connects through the 850 interface (such as the **Hayes Smartmodem™**) and certain other modems such as the **MPP 1000-C™**. **HomeTerm** brings you the exciting world of telecommunications without the difficulties of wading through arcane and obscure technical manuals.

In all you get three 'integrated' programs at a low price, on a copyable diskette, so you don't have to worry about damaging your master copy every time you load a program. Each program has been thoroughly tested and debugged to make sure it runs smoothly and properly. We're sure you'll find **HomePak** the best deal in a software package you've bought for your computer!

# CHAPTER 2

## GETTING STARTED

### PREPARING BLANK DISKS WITH ATARI DOSII

Keep text files on their own disk.

Format two disks.

The first for 'HomeText/HomeTerm Files'.

The Second for 'HomePak Programs'

**WARNING:** you cannot use a HomeFind data disk to store any other files or programs.

Before you begin work with **HomePak**, you need to prepare some disks. You will need blank disks for your data files and your text files. You will also need to make a backup copy of the master disk we provide so that you can work with the **HomePak** programs without worrying about damaging your original disk.

**HomeText** and **HomeTerm** can both use any disk you use for files and to store your programs on, but **HomeFind** needs a new, blank disk to keep your data properly. For your own organization, it's best to keep text files on their own disk, so you need to format a new disk for your **HomeText** files. You can use the same disk when you are using **HomeTerm** as long as you have enough space for any files you download from another computer.

The first thing to do is to make sure your computer is properly hooked up and all cables are attached. Place a disk with **Atari DOS II** (Disk Operating System) in the drive. Turn on your drive, then your monitor or television set and - when the red 'Busy' light on the disk drive goes out - turn on your computer. When DOS is loaded and the menu screen appears, remove your disk and put in a **new** disk. Choose menu selection 'I' to format the disk. This completely erases anything previously on the disk and prepares it to receive new data. When the process is complete, use the 'H' option to write DOS files to the disk.

Format two disks (you don't need the DOS files on the second disk) and label the first disk '**HomeText/HomeTerm Files**' and the second '**HomePak Programs**'. **HomeFind** will format its own disks from within the program itself, so you only need to have a blank disk ready when you start it. **WARNING:** you cannot use a **HomeFind** data disk to store any other files or programs.

While you still have DOS loaded, place the original **HomePak** disk in the drive and choose menu selection 'J' to duplicate the disk. Follow the screen instructions, using the original as the 'source' and the disk you labelled '**HomePak Programs**' as the 'destination'. The computer will prompt you for each stage as the copy is being made. Once you have the copy, place your original in a safe place and only use it to make backup copies when required. Don't cover the write/protect notch on your backup copy with a sticker; you may want to change the screen colors to suit your own pleasure and save those changes to the disk as the new start-up colors.

## POWERING UP

**HomePak** already contains DOS, so you don't need to write DOS to the disk for your own copy. **HomePak** is an autoboot disk, which means it loads the menu program and starts itself without needing any special commands from you.

While you can copy individual files from the original disk, it is not recommended that you do so. Each program needs several other programs or files to boot properly and you won't be able to get one working alone. **HomePak** was written as an 'auto boot' disk which performs several functions *before* loading a single program. Keep all of the programs together on the one disk and you won't have any problems.

The process of formatting and duplicating disks is further explained in the Atari Disk Operating System manual. If you need more information, refer back to it.

When you're ready to start working with **HomePak**, turn off your computer and disk drive. You should now turn on your system in the following order:

1. Television or monitor
2. Printer and modem
3. 850 interface (if you are using one)
4. Disk drive number one (make sure your **HomePak** disk is in the drive after it is turned on.)
5. Other disk drives
6. **Atari** computer (make sure you have no cartridges like BASIC installed)

Make sure you have no cartridges installed.

If you're using an XL series computer, it isn't necessary to hold down the OPTION key during loading, as with some programs. **HomePak** knows to disable BASIC. For the 400, 800 and 1200 machines, you must make sure you don't have the BASIC cartridge in the slot when booting.

You will need a modem attached to your system in order to use **HomeTerm** properly. You need a printer to produce 'hard' copy with any of the other programs, although you don't need one to use them to create and store files or information.

**HomePak** works with the **Atari** direct connect 835 and 1030 modems and a direct connect serial-to-

## THE MENU SCREEN

parallel printer interface such as the 'Ape Face'™. The **HomePak** main menu screen will appear shortly after you turn on your computer. Make sure your sound is turned up a bit on the tv or monitor so you can hear the sound prompts.

The main menu screen is how you get from one part of **HomePak** to another. If you press the **SELECT** key, you will see the colored bar move from one program name to the next. The bar changes color for each program and gives you a little sound prompt.

Using **SELECT**, position the bar over the program you want to use and press the **START** key. The chosen program will load. You will be prompted when you need to change your program disk for your data disk. You are now ready to begin using **HomePak**!



Fig.1 Main Menu Screen

# CHAPTER 3

## HOMETEXT

### THE WORD PROCESSOR

You'll need a printer to print out anything you write.

### BASIC WRITING FEATURES

Word processing is easily the most popular use for home computers (after entertainment). Until you've tried it, you're probably not aware of how easy writing can be with a computer. You can make changes and corrections, move blocks of text around quickly, change and replace characters, words or phrases, search for references and words in your text, delete unwanted material - all with a few simple keystrokes. Plus you get to save your text to disk as a permanent record, and come back to it any time. Once you begin to use **HomeText** for your writing, you'll wonder how you ever got along without it!

**Hometext** has several advanced features as well as the 'standard' functions mentioned above; for one, it allows you to take key information out of your **HomeFind** data and include it in the letters or text you write; very similar to the powerful 'mail merge' feature found in expensive business software. It also allows you to print in bold, enhanced or underlined text.

To use **HomeText** properly, you'll need a printer, connected either to your 850 interface or via a serial-to-parallel interface such as the Ape-Face™. You don't need to have the printer on when you're just writing the letters, memos, reports or whatever to save them to disk, but you will need it hooked up properly in order to print out anything you write.

Load **HomeText** from the main menu by selecting the program and pressing the **START** key. When the copyright screen appears, press any key to get to the writing screen.

Press any key once the program has loaded. At first there's nothing on the writing screen; you have an empty screen waiting for you. Take a look at the bottom status lines on the screen; you'll see you're in 'Replacing' mode and you have about 8350 bytes left in the buffer. In order to see what you can do with **HomeText**, type in the two paragraphs we've shown in the sample screen.

Just type in the paragraphs; the words will 'wrap' around the screen as you see below, in the

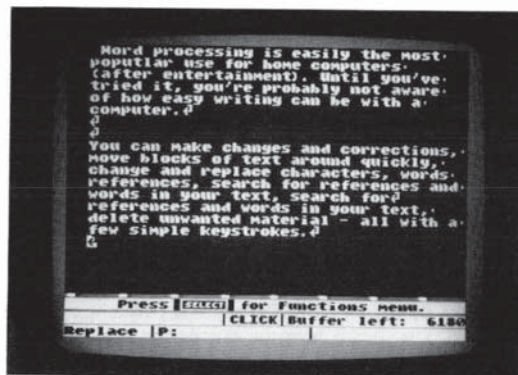


Fig. 2: Sample Text

proper places. When you get to the end of a paragraph (not a sentence), press the **RETURN** key. Use the **DELETE/BACK S** to correct any mistakes. You'll need to have some sample text to try the various features described below. Before you do anything else to the text once you've typed it in, press **SELECT** and save the file on a blank, formatted disk under the name **'SAMPLE.TXT'**.

All of this text won't fit on the screen at once; you'll see the top scroll up and out of sight as you add text to the bottom. The status lines at the bottom of the screen will be explained in more detail further on in the text, but not to keep you in the dark, they are:

```
-----
:           A           :           B           :           C           :
:   D   :           E           :           F           :
-----
```

A: current filename of text  
B: Key CLICK status

C: Amount of memory left in the buffer  
D: REPLACE or INSERT mode

## MOVING AROUND THE TEXT

Atari cursor controls functions;

## OTHER FEATURES

The "J" character

'Replace' mode.

"Atari key" toggles insert and  
replace modes;

E: current output device (P: for printer or disk filename)

F: current HomeFind merge filename (selected from Functions menu)

**HomeText** sees your document in two ways; as the whole buffer and as separate screens. You can move from the top to the bottom of the buffer by pressing **CTRL T** or **CTRL B** respectively; watch the screen display change when you try this. You can also move about the screen; to the top left with **CTRL Q**, the middle left with **CTRL A** and the bottom with **CTRL Z**. To move backwards in the buffer by a full screen, use **CTRL W**, and forwards by a full screen by **CTRL X**.

Finally, you can move to the beginning and end of the current line with **CTRL S** and **CTRL D**.

You should be familiar with the Atari cursor control functions; **CTRL** plus an arrow key. These work here to move the cursor up or down a line and forward or backward a single space. **DELETE/BACK S** erases the character left of the cursor and **CTRL DELETE** erases the character right of the cursor. **SHIFT DELETE** erases the entire line. **CTRL INSERT** adds blank spaces to the right of the cursor, but **SHIFT INSERT** *doesn't* work here.

There are several features about this mode you will discover; the first is that the 'buffer space left' figure decreases with each character you type in. Then, you'll see the "J" character used to signify that you pressed **RETURN**. Where the word breaks are, you'll see a small dot which tells you the text continues on the next line. Finally, note the small colored marks on the bar just above the first status line; these are graphic representations of the 'tab stops'; described a bit further on.

These key combinations are described in the quick reference guide to **HomeText**. Practice moving about the screen and the buffer until you're familiar with these commands. Try adding more text and see how it affects the buffer size and your movement through it.

If you type on top of a character, your new letters write over the old - that's because we're in 'replace' mode. Try typing over a line of text to see how this works. If you want to insert a character, word or even a larger body of material into something you've already typed, press the **Atari key**; this toggles insert and replace modes; the screen border changes color to let you know which mode you're in as well as the message on the status line. When your buffer is almost full, you won't be

able to use insert to add more characters than you have memory; you'll be put into replace mode automatically.

Press the **Atari key** and go into insert mode. Move the cursor to the top of the buffer then use the **CTRL** and down arrow to move to the beginning of the first paragraph and press the space bar five times; this indents the text properly. Move to the beginning of the next paragraphs (use the **CTRL** and down arrow keys) and do the same. You'll see the words wrap around the screen to fit properly. Try placing the cursor in the middle of the text and typing a few words; watch how the words wrap around on the screen as the existing text is pushed to the right to make way for your new text.

Press the **Atari key** to go back to replace mode. You can stay in whichever mode suits you best, toggling to the other when you need to. The change in border color will help remind you what mode you're in.

The TAB Key

The **TAB** key moves the cursor to the next tab stop - initially set to every five columns. If you want to add a tab stop to the bar below the text, move the cursor to the correct position and press **SHIFT-TAB**; another mark will be highlighted on the indicator bar. To remove a tab, move the cursor over the location and press **CTRL-TAB**. You'll see the mark disappear except at the end of text. **TAB** doesn't force an indentation; it only moves the cursor. To indent the text, use the insert mode and add spaces to the front of a paragraph.

The next step to learn is manipulating text 'blocks'. A block is any large chunk of text you want to move, delete or copy. Press **START** to see the block menu appear. It will appear in the middle of your text, but don't worry; it hasn't harmed anything.

Choose **Move text**. At the prompt, move the cursor (using **CTRL** and the arrow keys) to the beginning of a paragraph you typed. Press **RETURN**. Then move the cursor to the end of the same paragraph and press **RETURN**. This defines the block to move. Now move the cursor to the top of the buffer (**CTRL T**) and press **RETURN**. The block (paragraph) you defined will be moved to the new location immediately, erasing it from its old location and inserting it into the new.

## BLOCK MANIPULATION COMMANDS

Move text.  
Copying text.



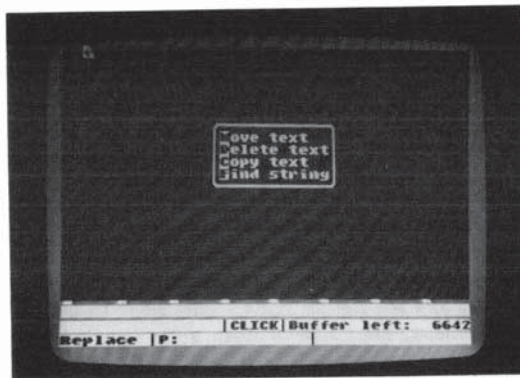


Fig. 3: Block Manipulation Window

"NOTE:" Move and Copy text only work with blocks of text less than 960 characters, or about one screen in length.

and Copy. When you press **RETURN** again, the section you defined will disappear. Make sure you really want to erase it before you go ahead!

In case you chose the wrong feature, don't move the cursor at all; press **RETURN** twice; the computer will ignore the request and say "Never mind!"; you can't move or copy a block inside itself. If you want to leave without making any choices at all, press the **ESC** key.

Copying text works exactly the same as moving text, except that it duplicates the block and leaves the original in place, so you have the block appearing twice in your text. Press **START** again and choose Copy; place the cursor at the beginning of the first paragraph and press **RETURN**, then at the end and press **RETURN**. Move the cursor down one line and press **RETURN**. The block is copied to the new location; you'll see both blocks on the screen now, one below the other. NOTE: Move and Copy text only work with blocks of text less than one screen in length.

To delete a block, press **START**, and define the paragraph you just copied by moving the cursor and pressing **RETURN** at the beginning and end of the paragraph as you did with Move

## SEARCH AND REPLACE

Whatever you search for should be typed exactly as it appears in the text.

To find a particular word or phrase, or even collection of letters in a text, press **START** and choose Find string. Type in the phrase *business software* and press **RETURN**. Whatever you search for should be typed exactly as it appears in the text, using the correct upper and lower case characters. The computer begins to search from the current cursor location, so if you want to search for a string in the entire buffer, move the cursor to the beginning of the text buffer first (**CTRL T**).

**HomeText** will stop at the first occurrence of the string it finds in the text and ask you if you wish to replace it. Type **Y** for yes, and when it asks you to type in the word or phrase to replace the word, type *computer programs*. **HomeText** will ask you if you want to replace every one of these words it finds in the text. Type **N** for no (right now, there's only one).

You will be asked if you want **HomeText** to continue searching for more occurrences of the word. If you say no, the search will end and the cursor will be on the first character of the word you searched for. Take a look at the last paragraph now; you'll see that *computer programs* has replaced *business software*.

**HomeText** will tell you if it didn't find the string in the text, and it will move the cursor to the bottom of the text buffer when finished searching or replacing. Use **CTRL T** to get back to the top.

A popular trick used in word processing is to use a short form of a frequently typed word or phrase in your text - such as *wp* for word processing - and then replace every occurrence when you're all done typing; it can save you a lot of typing! Here's another small tip for advanced users; if you keep the **START** key pressed down, the window doesn't appear; you can press **M**, **D**, **C** or **F** to choose your function, then answer the prompts. It will save you a keystroke or two.

## LOADING AND SAVING FILES

Press the **SELECT** key.

When you press the **SELECT** key, you'll see this menu appear. Numbers one to four will bring you a directory of what's on the disk in that drive and how much space is left for files. To save the file (store it on your disk or other selected output device), press **S** and answer with the file name **MORE.TXT**. If you have already loaded a file, you'll be asked if you want to save it with the same name again. The current filename will appear in the status line once you load or save a file.

To load a file from your disk, press **L** and type in the file name. To load the file you saved earlier, press **L** and type **SAMPLE.TXT**.

- 12 You don't need to type in D: since this is the default.

In case you still have text in the buffer, you will be asked if it's okay to overwrite it when you try to load a new file. Anything which is overwritten is erased for good, so be careful. You don't need to type in D: or D1: before a file name, since this is the default.

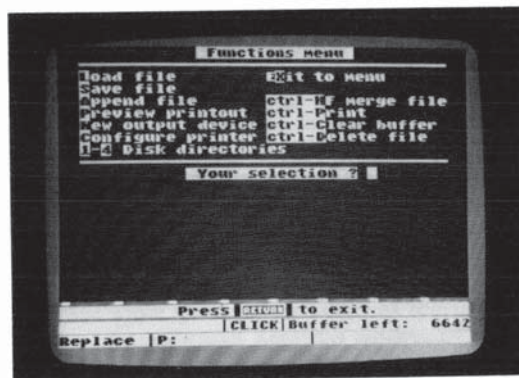


Fig. 4: HomeText Functions Menu Screen

## APPEND, NEW OUTPUT

Append allows you to attach another file to the end of the current buffer, if there is room available for both files in the buffer. You can string files together for printing which are larger than the buffer space by using the 'include file' feature, described further along. Press **A** and answer **SAMPLE.TXT**. When you return to the text window, you'll see the file you saved was duplicated; the second copy was appended to the end of the first.

New output device allows you to choose your final output destination; you can rename the file and print it to disk (device D:) or the printer (P:). Don't use a disk filename for output if you have HomeFind merge files in your text; it will cause the file to be written and erased until HomeText encounters the HF End-of-File (EOF) token.

## 13 CONFIGURE PRINTER

Configure printer allows you to change the default printer control commands (you can save these and several other changes to disk in the configuration file by pressing **CTRL-W** described later). **HomeText** supports only three printer control codes you can change; bold, extended and underlined print. You enter the codes (up to five decimal values, each separated by a space) to turn the print commands on and off separately. These command values are found in your printer manuals. The screen tells you what the last or default values for each control commands are.

If your printer supports other features, such as italics, you can tell **HomeText** the control codes for this instead of either the bold or underlining features described here. Another way to do this is by using the 'special character' command, described below.

One of the most impressive and useful features of **HomeText** is the print preview function. This graphically illustrates what your page will look like when it's printed, using dotted lines to replicate each line of text, highlighting any special printer features (extended and boldface words or characters are shown in blue, underlined words have a green line beneath them; normal words or characters are printed in black).

Print preview works with line lengths of up to 158 characters and page lengths of up to 88 lines (how you alter these is described in the next section).

There is one small drawback; print preview needs a lot of memory to work - there must be about 5400 bytes remaining in the buffer space in order to preview a single file in memory. This means you can only preview files of two pages in length at most, when the file is in memory. Try a preview of the file you have in the buffer; see how each word and paragraph is graphically represented on the screen. Press **RETURN** to continue or (at any time during the preview), **SELECT** to quit. You will be told if your file is too large to preview.

If you want to preview a long text file, first save it to disk, then clear the buffer and enter on a blank screen press **OPTION D** and then type the name of the file you wish to preview. Then, go to preview and files of any length can be previewed on the screen.

To clear the buffer, use **CTRL C**; you'll be asked to confirm it first. This completely erases everything you had there - all text - so make sure you have saved any important material first, because you can't get it back once you've cleared it.

To delete a file on the disk, press **CTRL D** and give the file name. A deleted file cannot be restored, so make sure it's the file you want to delete first. To prevent important files from being accidentally deleted, use the 'lock' command in **Atari DOS** to lock a file.

### PRINT PREVIEW

Print preview needs 5400 bytes remaining in the buffer to preview a file in memory.

To preview a long text file.

### BUFFER COMMANDS

Make sure you have saved important material first.

## THE PRINTER COMMANDS

To print a file, press **CTRL P**. Make sure your printer and interface (if you have one) are both on or else you'll get an error message. Print the file **SAMPLE.TXT** now and see how it looks. Save this copy to compare with a later printout of the same file we'll do, after we've made some changes to it.

To format your file for your printer - set the margins, define special text features (extended, bold-face or underlining), centering, justification and other features - you press **OPTION** and the window will appear. Formatting establishes how the output will look when it gets printed. Printer commands are inserted into your text at the location you want them to take effect. Press **OPTION** to see the menu which looks like this:



Fig. 5: The Printer Format Window

Make sure your cursor is in the right location before changing or adding a feature.

There are several things to watch out for when using this menu. First, make sure your cursor is in the right location before changing or adding a feature. The feature will appear on the screen, in inverse characters, where the cursor was positioned. **HomeText** has several default values which will be used if you don't make any changes. In some cases, such as print features, you have to turn the feature on first, then off where you want to return to normal text. In such a case, the inverse name will be preceded by a left-facing arrow to tell you that this is where the command ends.

## 15 A QUICK EXAMPLE

Load the file **SAMPLE.TXT** and place the cursor at the beginning of the first line - 'All about word processing'. Press **OPTION** and choose **C** for center text. Return to the functions menu by pressing **SELECT** and preview the text; you'll see the top line is now centered on the screen. Return to the text screen.

Move to the beginning of the second paragraph, press **OPTION** and then **L** for left margin. Choose 25 and press **RETURN**. Keep the cursor at the same place and press **OPTION** and then **L** for left margin. Choose 25 and press **RETURN**. Keep the cursor at the same place and press **OPTION** and **S** for spacing; choose 2 and press **RETURN**. Now go to the functions menu again and preview the text; you'll see that the second and any following paragraphs are double spaced, with a much more indented left margin. Practice using the printer commands and previewing their effects before you use them in your printed document. Before continuing on, re-load **SAMPLE.TXT** so you can try other features in an un-changed document.

### Quick Tips

You can delete a print format command by placing the cursor on the first character and pressing **CTRL-DELETE**. One useful hint is to create one common, handy print format with margins, headers and footers, page dimensions and other necessary commands together. Save it as a file so you can call it up any time and have your printer commands and page dimensions already entered when you begin typing.

For advanced users, if you keep the **OPTION** key pressed down, the window doesn't appear; you can press the desired letter to choose your function. This means, of course, that you need to memorize the proper commands in order to use this method.

## PAGE DIMENSION COMMANDS

Use the print preview feature to see the effect of a command.

Commands which affect the dimensions of the printed page - **margins, page length, spacing, line length** - should all be placed at the top of the buffer, before you write any text. These include margins, line length, page size, line spacing and indentation of paragraphs. If some of these commands appear later in a file, they can cause your printing to come out rather awkwardly. Use the print preview feature to see what the effect of a command is when placed in the middle of the text before you start to print your file.

While you can vary these dimensions in almost any location in your text, it's a better practice to use standard dimensions throughout your document, rather than having the text appear in different forms in the same document.

Margins can be changed anywhere in the text, but...

Page size and line length depend on your printer and the type of paper you're using.

## PRINTOUT APPEARANCE COMMANDS

Line spacing can be changed at any time.

To make your format commands easy to read, you can place a carriage return (press **RETURN**) between commands. Most of these commands are simple to use and obvious as to their functions.

**Margins** are the distance in characters from the left and topmost edges of the paper at which the text starts (left margin) and ends (right margin, counted from the left side), as well as the number of lines from the top of the page that printing will begin at and end at (bottom margin). The initial defaults are: left margin 5 spaces, right margin 70 spaces, top margin 6 lines, bottom margin 61 lines (the normal page length is 66 lines from top to bottom and 80 characters wide).

Margins can be changed anywhere in the text, but there are some constraints; the left margin should be entered first, before the right margin. The value for the left margin **must** be lower than that of the right, so you won't have an overlap. Make sure you leave enough spaces between margins to print your longest word. To print a continuous output file with no top or bottom margins - say a draft copy for editing - set top and bottom margins both to zero.

You can use the margins to offset a section of text to emphasize it, a method used when quoting other material. Try this with the second paragraph. Make your left margin 10 spaces, your right 60 at the beginning of the paragraph you want to offset. Don't forget to return the margins to normal at the end of the offset section.

**Page size and line length** depend on your printer and the type of paper you're using. **HomeText** defaults are set for the standard page size; 8 1/2" by 11" - 66 lines long and 80 characters (spaces) wide (tractor feed paper has an extra 1/2" on each side for the paper feed, but don't count it; it's ignored by the printer!). Don't set your page size or line length greater than your actual paper size, or you may end up printing on the roller or platen of your printer! You normally won't change your page size in the middle of a document.

**Line spacing** is the horizontal distance between lines on a page, counted in number of lines. Lines which follow each other with no space between them have a spacing of 1. The space can be set to almost any length, up to 231 lines, but there's not much point in setting it greater than your page length. The default is one space. Line spacing can be changed at any time, say to double space one paragraph for emphasis. Make your second paragraph double spaced; don't forget to return to single spacing at the end of the paragraph or you'll find the rest of the document appears double spaced. Look at the effect with print preview.

Turn justification on and off where you want it.

Center only works on one line at a time.

Block right only works on one line at a time.

## TYPEFACES AND PRINTER CONTROLS

Don't forget to turn off a typeface command or the rest of your text will use it!

In print preview; extended and boldface words or characters are shown in blue, underlined words have a green line beneath them.

**Indentation** is the number of characters **HomeText** will begin a paragraph in from the left margin (not from the left side of the page). The default is zero, so the paragraphs don't begin inset from the margin unless you change it. If you want to indent your paragraphs, enter an appropriate number; five is pretty standard. Indentation can be changed at any time; often text which is offset by changing the margins has no indentation.

**Justification** is a method of evenly spacing text in a paragraph so that it lines up evenly along both margins. To do this, extra spaces are added between words to make each line the same length. You must turn justification on and off where you want it; if you turn it on at the beginning of the buffer, before any text, and don't turn it off, your entire buffer will appear justified. You can turn justification on or off anywhere (it takes place on the next line after the command). If your text isn't justified, (called 'rag right') it will line up along the left margin only.

**Center** allows you to place the current line (it must be placed at the beginning of the line) in the center of your page, evenly spaced between the left and right margins. Center only works if your line is less than a page line long (fewer characters than the right margin size minus the left margin size). Center only works on one line at a time, it doesn't center paragraphs.

**Block right** aligns the right end of the current line with the rightmost margin. Like center, it only works on one line at a time, and only if the line is shorter than your page line length. Block right is often used to place your address and date at the right edge of the top of a letter, and the closing at the right edge of the bottom.

**Bold**, **extended** and **underline** are all type commands. Each must be turned on at the place where you want to begin the special type, and off again where you want to end it. Place the cursor at these locations and call up the print command window, answering the screen prompt with **on (Y)** at the beginning and again, but with **off (N)** at the end of the text.

Extended type takes up twice as much space (in width) as normal type on a page. You won't see the typefaces on the screen, only the inverse characters for the commands to turn them on and off. Don't forget to turn off a typeface command or the rest of your text will use it!

You can see what text you have in the special typeface in print preview; extended and boldface words or characters are shown in blue, underlined words have a green line beneath them; normal words or characters are printed in black.

**Special characters** allow you to send printer function codes to your printer to get features not supported by **HomeText** (italics, super- and subscript, etc.). These characters are not counted towards justification, so you don't have to worry about throwing your line off. You type in the deci-



mal value of the character you want to send to the printer (ie, **ESC A** is 27, followed by 65). Decimal values greater than 255 can't be sent to the printer.

Remember when sending special characters, that most features such as italics must be turned off as well as on, so place your special characters to turn on the feature at the beginning of the text where you want it to take effect. Then move to the end of the text where you want the effect to stop and enter the special characters to turn the feature off.

End of page.

**End of page** is a method of forcing the printer to end the page at the place where you place the command. **HomeText** will print any footer (see below) on the bottom of the page, then go on to start a new page. If you will be pasting pictures or graphics into your text, end of page is a good method to reserve a large blank space for them. Try placing an end of page command after the second paragraph in your text and preview it; see how the third and later paragraphs appear on the next page.

Wait per page.

**Wait per page** isn't an appearance command; it tells the computer to halt printing until told to resume when you press a key. This allows you to insert separate pages one at a time when printing on a sheet-fed or letter-quality printer. It must be the first command on a line and should be at the top of your buffer. If your printer is a tractor-feed, dot matrix printer, you won't need to wait; each page is fed directly into the printer automatically.

## HEADERS AND FOOTERS

You can include in your text one or more lines at the top and bottom of every page; chapter headings, page number, name or whatever, up to 255 characters in each (including carriage returns and formatting commands). The text at the top of the page is called a **header**, at the bottom it's a **footer**. A typical header might be:

Chapter 1: Word processing Page @ by Bob Smith

This will automatically print out at the top of every page, and the page number will be incremented to show the right number. For emphasis, you could make the words "Chapter 1" bold-face and center the phrase "Page @". You can see headers and footers in the print preview.

Header and footer commands must start at the beginning of a line.

Header and footer commands must start at the beginning of a line. They may contain their own formatting commands after the opening command (such as centering, block right, etc.).

They must be closed (off) with another header or footer command and the off command must be followed by a carriage return. Headers and footers can have carriage returns in them as well, so they can be more than one line long.

You can have **HomeText** automatically count and number your pages by placing an "@" sign in the header or footer.

## INCLUDING FILES

The include command can also be used to preview files of any length.

Make sure the file to be included is on the proper disk.

**Include** allows you to link several files together for printing which would be too large (if combined) to fit together in the buffer. As mentioned earlier, the include command can also be used to preview files of any length. You can also create special 'batch files' which have only your format files and a series of include commands for smaller files - say chapters - to print long documents.

When **HomeText** encounters the include command, it then brings the file named immediately after the command (the name must be a valid filename and device such as **D1:TEXT.LTR**) and prints it right after the last line (not footer line) in the current text. Make sure when you print your file, that the file to be included is on the proper disk before you begin.

If you want the included file to start on a new page, place an end of page command on the line before the include file command. Include file commands must be the first thing on a line. If you want to include more than one file, place the include commands one after another in the first file to be printed. You cannot 'nest' include commands like **FOR-NEXT** statements in **BASIC**.

To test this out, move to the bottom of the buffer (**CTRL-B**) and press **OPTION**, inserting a new page command at the end. Then press **OPTION** again and insert an Include command, for **D:SAMPLE.TXT**. Make sure your printer is hooked up and go to the functions menu for printing the document. Watch how **HomeText** first prints the buffer, then goes to the disk to call up the next file and prints it. You'll also see the effects of all of your other format and printer commands in the printed file; the line spacing and margins.

## MERGING FILES FROM HOMEFIND

The merge token must be the only thing on a line, followed by a carriage return; it can't be placed in the middle of a line or within the text body.

You can call up data from any **merge** file you have created in **HomeFind** by first entering the name of the **HomeFind** file from the functions menu (**CTRL H**), and then inserting the merge token in the text where you want the data to be printed. Up to 80 characters (**HomeFind's** maximum record length) can be merged into your text at a time. The merge token must be the only thing on a line, followed by a carriage return; it can't be placed in the middle of a line or within the text body.

You will have to create the proper HomeFind file in order to use this command.

### Quick Tips

The merge command will bring into your text the first record associated with that query (explained more fully in the **HomeFind** chapter). Of course, you will have to create the proper HomeFind merge file first in order to use this command.

When you use the **HomeFind** merge token, **HomeText** prints the first record into the body of your text. If there is more than one record in the file (say your file was titled 'address' and contained everyone's address from the entire disk), then **HomeText** will print the next record, with the same text; this is how you can print the same letter to several people in your database (mailing list). Simply type the merge command where you want to print the address, instead of typing the entire address out each time. **HomeText** will translate the down arrow characters into carriage return/line feeds where it encounters them. This merge feature can easily save you a lot of time in typing, especially where letters are involved.

More than one merge file record can be called upon in a body of text, but each must be available on the proper disk at print time, in the proper order to be included in your text. Each time **HomeText** encounters the **HF** merge token in the text, it includes the next record in the same file. So if you have address and phone number and two tokens in a letter, the first will be replaced by the address and the second by the phone number.

If you created a merge file called 'Bob', it will contain all of your data, such as address, phone number, shoe size, job, make of car (provided, of course, you have entered all of this into **HomeFind**). When you include the merge token in a letter to Bob, the program will print out several letters with each record, one right after another, in place of the **HomeFind** merge token. So the first letter will be okay if the first record is Bob's address, but the next will have the phone number instead of an address, the next a shoe size and so on. You end up with many letters, but only one printed correctly.

To avoid this problem, create proper merge files; only have in them the information you need to have printed out in that letter. If you create a 'generic' type file with too much information in it, you may find it easier to 'include' a file on a separate page which does nothing but cause **HomeText** to print the remainder of the records on the page without reprinting the text. This include file could be nothing more than a series of merge tokens to represent the remaining data in the file. So if your merge file has the address, phone number, job and work address in it, but you only want the address, include a file with three merge tokens on a blank page. This is faster and easier than printing four letters, one for each record!

To create a label list.

## CONFIGURATION FILES AND DEFAULTS

If you want to create a label list, make your page length six, and your set top and bottom margins accordingly. Use a letter which only has an **HF** merge token as its entry.

The **HomePak** disk contains a number of special files with a **-SET** extension, called *configuration files*; one for each of the three programs on the disk. These are records of the current screen color, brightness and text brightness, margins, key click sound and other features specific to each program in **HomePak**. For **HomeText**, this also includes tab settings, shift-lock and the three basic printer control codes.

You can change these features to suit your own use (see the quick reference guide in each program for what can be changed) and save these changes back onto disk by pressing **CTRL W** in the functions menu. When you load the **HomePak** program, the new settings will be loaded automatically.

Certain settings in **HomeText** have default values which can be changed when you type the proper commands in your text. These are always the same when you begin to use **HomeText** each time. The defaults used are:

Left margin.....	5
Right margin.....	70
Top margin.....	6
Bottom margin.....	61
Page length.....	66
Line length.....	80
Line spacing.....	1
Justify.....	OFF
Indent.....	OFF
Wait at end of page.....	OFF




# ATARI HOMETEXT

Quick Reference Guide

## CURSOR CONTROL KEYS

- CTRL Q**  
cursor to top left of screen
- CTRL A**  
cursor to middle left of screen
- CTRL Z**  
cursor to bottom left of screen
- CTRL W**  
cursor backwards one screen
- CTRL X**  
cursor forward one screen
- CTRL S**  
cursor to beginning of current line
- CTRL D**  
to end of current line
- CTRL T**  
cursor to top (beginning) of buffer
- CTRL B**  
cursor to bottom (end) of buffer

## OTHER KEYS

- TAB**  
cursor to next tab setting
- SHIFT TAB**  
set tab at current column where cursor is
- CTRL TAB**  
remove tab at current column where cursor is
- CTRL arrow**  
moves cursor one space in direction of arrow
- CTRL DELETE**  
delete one character to right of cursor
- SHIFT DELETE**  
delete current line
- CTRL INSERT**  
insert character at cursor
- ATARI KEY**   
toggle between insert and replace modes

## SCREEN CONTROL KEYS

To change screen color:

**SHIFT CTRL ↓** (down)

**SHIFT CTRL ↑** (up)

To change screen brightness:

**SHIFT CTRL <** (down)

**SHIFT CTRL >** (up)

To change text brightness:

**SHIFT CTRL I**

To toggle the key click sound:

**SHIFT CTRL TAB**

To change the left hand margin:

**SHIFT CTRL M** (toggles between 0 and 2)

To save these changes on your program disk:

**CTRL W** (make sure your **data disk** isn't in the drive!)

This will make your changes the new startup defaults.

## EDITING KEYS

To delete the previous character:

**DELETE/BACK S**

To delete the previous line:

**SHIFT DELETE/BACK S**

## CONSOLE KEYS

To select the printer command window:

**OPTION**

To enter the Functions menu:

**SELECT**

To select the text block window:

**START**

## IN THE FUNCTIONS MENU:

To preview a print-out:

**P**

To load a file into the buffer:

**L**

To save the buffer as a file:

**S**

To append a file to the end of the buffer:

**A**

To specify a new output device (**P:** or disk filespec)

**N**

To specify printer configuration:

**C**

To get a disk directory:

**1 to 4**

To **exit to the main menu**:

**X**

To specify a **HomeFind** merge file:

**CTRL H**

To print the buffer:

**CTRL P**

To clear the buffer:

**CTRL C**

To delete a file on disk:

**CTRL D**

# CHAPTER 4

## HOMEFIND THE INFORMATION MANAGER

A means to add order to the data you have collected.

You hear a lot about database managers these days, but what is a database? It is simply any organized collection of 'data' - that is, information, facts, details, notes, names and addresses and the like. A database manager is a means to add some sort of order to the data you have collected - for example, a name and address book is a simple method of organizing or managing that data.

Of course, computer database managers offer a lot more than storing your data; they offer flexible ways to retrieve, to sort and select the information. For businesses which deal with many clients, large inventories or staff, the database manager must be powerful, complex and very flexible. This usually means difficult to learn and expensive as well.

Database managers generally depend on a rigid framework of entry lines called 'fields', which, once you have established their size, usually remain fixed and cannot be changed. So if you decide you only need ten characters for a person's business title but you find later you have to enter 'Assistant Vice-president for Exemplary Sales Division', then you're out of luck. You have to shorten the title down to fit the field; something like 'Ast VP ESD' which doesn't help or tell you a lot. Many database managers aren't very flexible when it comes to this type of thing.

Most of us don't think of data anyway; we don't organize information into little fields in our heads. When you think of Bob Smith, you don't mentally look up a box called 'title'; you think "What's Bob Smith's title?". You don't perform a conscious 'sort and extract' routine when you think "Who's Bob Smith?", so why should you have to learn to fit your thinking into the vertebrate structure of a database manager?

Well, you don't; **HomeFind** is a 'natural language' information manager; you type in information the way it occurs to you; "Bob Smith's title's Assistant VP Exemplary Sales Division" and that's it. The next time you want to know about Bob Smith, you ask "Who's Bob Smith?" and the computer will answer with all of the information you've typed in so far. Or if you ask "What's Bob Smith's title?", it will answer with "Assistant VP Exemplary Sales Division", just the way you type it in.



## CREATING A DATA DISK

All you have to learn is the simple style used when entering or retrieving information; you don't need to fuss about separate disks for separate data, about field lengths and extract parameters or the like. The process is simple, easy and remarkably uncomplicated for what you can do with it.

There are some tricks you will learn as you work with it, especially how to properly organize your information *before* you start to enter it, so you can retrieve it in the best manner.

Load the **HomeFind** program from the main menu by pressing **SELECT** to move the colored bar to **HomeFind** and press **START**. Follow the explanations which follow for creating a data disk and using the program.

Here is the screen you see once you have loaded the **HomeFind** program:

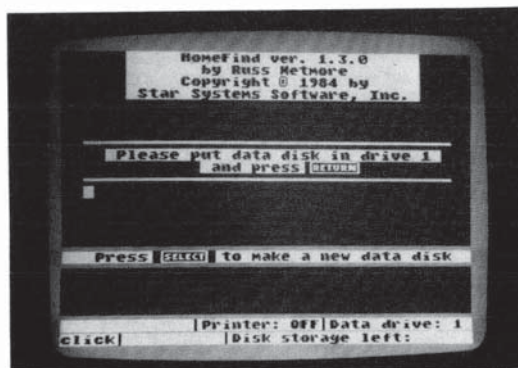


Fig. 6: **HomeFind**'s Initial Screen

Since you're just starting with this program, you'll need to make a new data disk. Remove the program disk and put a blank disk in the drive. If you're using more than one drive, you'll be able to change the drive number a bit further along. For now, just press **SELECT**.

The screen changes to the **Function** menu screen, and the prompt asks you to choose what you want to do. This is an abbreviated form of the screen, with only a few commands available. Later, when you are entering or retrieving data, you can press **SELECT** to see the full feature screen.

27 Make a new data disk by pressing M

You make a new data disk by pressing **M** - a process which formats the disk in the drive noted at the bottom of the screen as the 'data drive', erasing any material on the disk. You can change the data drive if you have more than one drive by pressing **D** (do so now, and place your blank disk in the chosen drive) or you can exit to the main **HomePak** menu by pressing **X**. You can also return to the previous screen which asks for an already prepared data disk by pressing **RETURN** by itself.

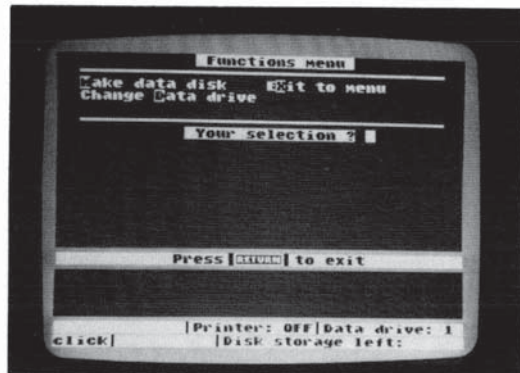


Fig. 7: The First Function Menu Screen

We will make a new data disk, so press **M**. You will next be asked to name your data disk - choose a name 12 or fewer characters long (including spaces, numbers and punctuation) and press **RETURN**. Use the **DELETE/BACK SPACE** key to correct any mistakes you make, or the **SHIFT-DELETE/BACK S** combination to delete the entire line. You have a final chance to escape without making a disk by answering **N** to the last question on the screen once you enter the name.

**HomeFind** will format and prepare the disk, saying "Done!" when it's finished. Press any key to continue. You'll be back at the function menu screen again.

Press **RETURN** to exit and we will be entering data on your new disk.

Keep your data disk in the drive and press **RETURN**. You will find yourself in the main **HomeFind** screen once the program checks your disk. Take a look at the bottom of the screen; now you'll see the name of your data disk in the left corner and the number of bytes left on the disk in the lower right; 91746 when you start with a new disk, or about 3700 records.

Before you type anything in, check the quick reference chart to see how you can change many of the parameters of the program. The **OPTION** key toggles the printer on and off. **SHIFT CTRL-TAB** combination toggles the key click. **SELECT** returns you to the Functions Menu screen. Other keys and key combinations will let you change the screen colors, brightness and the left margin.

You can save these changes as a configuration file on your backup program disk by pressing **CTRL W** from the function menu screen (not when you're in the data entry screen) and make them your own startup defaults. The original default configuration file will be erased when you do this. **CTRL W** is one of several commands not mentioned on the function menu screen (see the quick reference for these commands). Make sure your **program** disk is in drive one, **NOT** your data disk, when you save a configuration file!

Okay, let's try a few simple examples of entering information. Type this in exactly as you see it here:

Mike's birthday's April 18, 1958

Now press **RETURN**. You'll see what you typed appear in the lower middle section of the screen. The top of the screen will tell you "Mike's news to me! New subject? Y/N". The computer has just told you it has never heard of Mike and wants to know if Mike is a new subject. Answer with **Y** for yes. Then the computer will say "birthday's news to me! New tag Y/N?". Again, the computer wants to know if 'birthday' is a new tag to use in identifying 'Mike'. Answer **Y**. The computer will now save the information to the disk and tell you "Thanks!".

Every time you enter a new subject or a new tag, **HomeFind** will ask you if it's new. You answer **Y** for yes and the new item will be added to the information on disk. If you answer **N** or any other character, the entire entry will be ignored.

**CTRL W** is one of several commands not mentioned on the function menu screen.

Make sure your program disk is in drive one, **NOT** your data disk, when you save a configuration file!

## INFORMATION ENTRY SYNTAX

Subject's tag's object  
Notice the apostrophes - they  
are very important:

The rules are few and simple:

Your entry *must* have all three  
parts.

What you have done is enter your first 'subject', 'tag' and 'object'. The process of entry is always done in this simple three part form:

### subject's tag's object

Notice the apostrophes (the " ' " characters) - they are very important: they are the markers which tells the computer where each portion of the subject and tag in an entry statement ends. The computer 'parses' (analyzes the grammar of) each line to break it up into these parts so it can store them on the disk and retrieve them properly later. You can type in up to 80 characters for each part and the computer will treat it all as one segment until it reaches the " 's " break. This means that "Account #12345's", "follow up date for contract signing's", "Mike's" and "serial number's" are all individual, legal entries.

**HomeFind** creates three indices; one index for each of subject, object and tag. You can ask for information in any one of them. The rules are few and simple:

1. Subjects and tags can't have apostrophes in their names, but need an " 's " added to the end.
2. Objects can't have apostrophes in them, even " 's ".
3. A tag cannot be the same as a previously chosen subject and vice versa.
4. An object can, but should not be, the same as a previously chosen subject or tag.
5. Each part cannot be longer than 80 characters and the entire line cannot be longer than 144 characters.
6. An entry must have all three parts.

Your entry *must* have all three parts to be correct. If you are missing any part, the computer will ask for the object. You can press **RETURN** to quit and the computer will say "Never mind!", which means it has ignored what you typed in. If the entry has a subject and tag which you have already entered, the computer will respond as if you were asking it for information. If you type "Mike's birthday" by itself, the computer will tell you "April 18, 1958".

If you type in some information which is already entered, the computer comes back with "That's no news to me!". If you type an entry which has the same subject and tag but a different object - say "Mike's birthday's June 5, 1950", the computer will respond with a message like "Mike's birthday was April 18, 1958. Add or change? A/C". You can do either or press **RETURN** to quit that entry

## CHANGES AND CORRECTIONS

For changing an entry use the word 'isn't'.

and the computer will say "Never mind!". But if either the subject or the tag are different, the computer will accept the entry. It will save the new entry *as well as* the old if you choose to add the change.

While typing, you can use the **DELETE/BACK S** key to correct your entry, or erase the entire line with the **SHIFT-DELETE/BACK S** combination. But what if you make a mistake in the information? Say you type "Cindy's sign's Virgo" but you later find out she's really a Pisces. Then you want to change it.

The first method is to type the same line again, this time with the new, correct information: "Cindy's sign's Pisces". The computer will tell you that her sign was Virgo and ask if you want to add or change the entry. This method only works if there is one object for a particular subject/tag combination. If you choose to add rather than change, then the next time you enter Cindy's sign, the computer will assume you're merely adding to the growing list. This way, you can make something like Bob's dog's mean, nasty, vicious or whatever, all together.

The best method for changing an entry (and the only one which works when there is more than one subject/tag combination) is to use the word 'isn't', so "Cindy's sign isn't Virgo". The computer tells you the original entry and asks if you wish to replace it. You answer **Y** and the computer asks what Cindy's new sign is. Enter the new object and press **RETURN**. The computer will tell you "Thanks!" when finished. If you answer **N**, the computer deletes the entry completely, returning with "Forgot it!" when done. Any other key than **Y** or **N** cancels the request to change completely.

Continue entering the information you wish to store on the disk. For the examples below, type in the following:

*Robert's birthday's March 23, 1953*

*Mike's favorite color's blue*

*Mike's car's Honda*

*Mike's phone's 929-9909 (home)*

*Mike's phone's 596-1405 (office)*

*Robert's car's Chevrolet*

*Susan's favorite color's yellow*

*Robert's phone's 233-3331 (home)*

*Robert's favorite color's blue*

A little experimentation will show you that the computer will accept "mike" equally well as "MIKE" or "Mike". The program stores the information in the form you enter it, with upper and lower case intact, but it replies to your request in the case you ask in. So if you have entered "Mike's dog's Rover" and ask "what's mike's dog?", you get "Rover's mike's dog".

Your screen will now look something like this;



Fig. 8: HomeFind's Main Screen

As you enter information, watch the 'disk storage left' line to see how much space you've got left on the disk.

Entering a lot of similar data can be a bit of a chore. What if you wanted to enter a long list of friends' telephone numbers? Can you imagine typing Bob's phone's 255-4491, Judy's phone's 633-9090, Ian's phone's 444-2321' for a hundred friends? That's when the apostrophe comes into its own.

You can use an apostrophe as a 'ditto' (repeat) mark when entering repeated subjects or tags. You must have one blank space before and after the single apostrophe in order for **HomeFind** to

recognize it. In the phone list, you could type the first entry "Bob's phone's 255-4491" and then type all the others as "Judy's ' 633-9090, Ian's ' 444-2321", etc., using the apostrophe to signify the tag 'phone'.

## MULTIPLE LINE ENTRIES

Sometimes you want to break an entry up – particularly objects – into several lines rather than one long one. To do this, you insert a **CTRL-Down Arrow** in the entry where you want the line to break. For example: "Mary's address's [↓] 20 Main St. [↓] Apt. 301 [↓] Dorado, [↓] Calif 90180". When you ask "What's Mary's address?", you get:

```
Mary's address's
  20 Main St.
  Apt. 301
  Dorado,
  Calif 90180
```

## COMMENTS

Sometimes it's useful to be able to comment your entries with additional information that you don't need to reference in your requests for information. In the examples "Mike's phone's 929-9909 (home) and Mike's phone's 565-1405 (office)", you might like to keep the information about home and office out of the main entry so you don't have to remember exactly how you entered it when asking for information later.

To comment an entry, you use the vertical bar (|) character, like this: "Mike's phone's 929-9909|home" and "Mike's phone's 565-1405|office". Any characters after (and any spaces before) the "|" character are treated as a comment. Comments are ignored when **HomeFind** searches for information for a request.

## MAKING INFORMATION REQUESTS

Once you have enough information entered, you will want to retrieve it; after all, that's what a database is really for. So let's try a simple request. Type "who's mike?". You should get this:

```
Mike's phone's 929-9909 (home)
Mike's phone's 596-1405 (office)
Mike's favorite color's blue
Mike's car's Honda
Mike's birthday's April 18, 1958
  That's all!
```

## QUICK TIPS

You must type in the request exactly as you entered it,

"News to me!".

## GETTING SPECIFIC: COMBINED REQUESTS

## ANALOGOUS REQUESTS

If you type in "what's Mike" or even just "mike", you'll get the same response. You can ask for simple requests on any single subject, tag or object and get everything related to that request. You can also use the pronouns 'when' and 'where' interchangeably with 'what' and 'who'. Punctuation in your requests is optional but helps keep the process friendly when you use them; "who's mike" works as well as "who's mike?" but the latter is easier to use.

Try other simple, single item requests like "what's phone?" and "favorite color" to see what happens. You **must** type in the request exactly as you entered it; you must use "favorite color", not simply "color" or "596-1405 (office)" not merely "596-1405" or you will get the message "News to me!". This is why you should use comments to add information like office or home for phone numbers; you won't have to worry about the exact way you entered them later.

If you ask about something you *haven't* entered yet, you'll get a polite response "News to me!". If you have objects which are the same as a subject or tag, you won't be able to retrieve information about them with a simple request; you'll get the information for the tag or subject reference instead. For example, if you type "Dave's friend's Jim" and "Jim's friend's Paul", if you request only "Jim", all you'll get is Jim's friend's Paul". You'll have to use combined requests, described below.

You can be more specific with your requests. You can ask, for example "What's Robert's favorite color?" or "What's Mike's car?" and get the answer. Now if you ask something that you haven't entered previously, such as "what's Robert's house?", you'll be told the new item is "News to me!" and be asked if it's new (in this case, a new tag). Then the computer will say "Tell me, what's Robert's house?" and you can answer with the correct object. If you now say "What's Mike's house?" the computer will say back "News to me! Tell me, what's Mike's house?" and wait for your answer. Hitting **RETURN** alone cancels the entry.

So far, you haven't been shown any real magic; just simple clean requests. Now you'll learn some neat tricks. Type in the following:

Robert's nickname's Bob

Robert's hobby's fossil collecting

Acct. #1552's outstanding credit's \$145

Acct. #1552's credit limit's \$500



HomeFind can only deal with a request if the object is unique.

Acct. #1552's name's Lisa Harris

So now you can ask "what's Bob's hobby?", since Bob has been cross-referenced with Robert. By the same token, you can ask "What's Lisa Harris's outstanding credit?" and "what's Lisa Harris's credit limit?".

There's a hitch to this. **HomeFind** can only deal properly with an analagous request if the object associated with the request ('Bob' or Lisa Harris in these examples) is unique and not used elsewhere on your data disk. So if you type:

Bill's nickname's Bud

Bill's hobby's music

John's nickname's Bud

John's hobby's boating

and you ask "What's Bud's hobby?", **HomeFind** would respond with one reference, the last one typed, but wouldn't be able to distinguish between Bill and John or know which one you were referring to here.

You must also make sure you order your information in a way that makes an analogous query meaningful, as well as asking a relevant question. If you type:

Susan's bike's red

Susan's cat's Tibby

Susan's nickname's Sue

then when you ask "what's Sue's bike?", you get "Sue's bike's red", which is fine, but if you ask "what's Tibby's bike", you get "Tibby's bike's red", which is silly! Analogous requests require you to think out the request clearly before you ask, so that you don't get an answer which has no meaning. The **OBJECT** you use in an analogous request should have some meaningful relationship to the **TAG**.

## PRINTING YOUR REQUESTS

The **OPTION** key toggle.

HomeFind doesn't provide a report printout like many other programs; most home users don't need a fancy print out of their data. Instead, we offer a simple, easy method of printing: the **OPTION** key toggle. Press it once and the "**Printer: OFF**" line at the bottom of the screen becomes "**Printer: ON**". Press it again and it goes to **OFF**. Make sure your printer is turned on in order to print.

When the printer is on, it echoes everything *relevant* which appears on the screen to the printer; your new entries, your requests, plus everything you list when in the functions menu

## THE FUNCTIONS MENU

To change the disk, you must select N for new data disk.

section, below. You won't get prompts or error messages cluttering up your printout.

You can press the **SELECT** key any time and immediately be transferred to the functions menu screen. You will see that once you begin to enter data, several new options become added to the few we saw before, which are described above.

When you use **HomeFind**, you can only have one disk in one drive active at a time. In order to change the disk, you must select **N** for new data disk. If you simply insert a new data disk without using this feature, you will damage it and destroy the data on it **PERMANENTLY** when **HomeFind** writes something to the disk. **Never insert a new data disk without first using the new disk feature.** You will be prompted to insert the disk. **HomeFind** maintains certain information about the current disk in memory which is cleared out when you use this function.



Fig. 9: The Function Menu Screen

Make sure you put your new disk in the proper drive if you have more than one. If you choose the wrong drive number, you won't be able to enter or request any information until you change it to the correct drive. Use the **N** function even after you make a new data disk, before you write to it, or request any information from the disk (including listing all subjects and tags).

### Always backup your data disks.

Since **HomeFind** uses a special disk format for its *data*, you can't copy it with your regular DOS copy or duplicate feature (or write anything to the disk). That's why we have provided a simple routine to make backup copies of your data disks. You should **always** backup your data disks after each session with HomeFind when you have made additions, deletions or changes. Choose **B** and follow the screen prompts to insert the proper disks in the drive as necessary. Backup formats the disk first, so anything on it is erased.

It's often useful to see the list of all subjects and tags you have on a disk, especially when you're adding or changing a lot of data. The **S** and **T** choices will print the list on the screen for you. In order to get a printed copy, press the **OPTION** key before you make the choice, and again after to turn the printer off.

**HomeFind** deletes objects automatically, but not subjects and tags. When you delete an entry, the program doesn't run through every connection and make sure something wasn't filed under that heading. This would simply take too long to do efficiently, but it can leave 'dangling headings' on the disk which take up space but aren't used as references. To correct this, we have a special feature called **compress** which you should do regularly to your data disks.

### Choose **K** to reorganize your data disks.

Choose **K** to compress to reorganize your data disks. It cleans up the disk, reclaiming lost space, removing deleted entries and making sure all of the links are correct. The screen will show that it's working, with a dot printed for each step along the way. Depending on how much information you have stored on your disk, the process can take between one and 15 minutes to complete. Don't remove your data disk while its being compressed or you will damage it permanently. Always press 'N' for new disk after a compression, to read the new directory properly.

### Run the compress function to ensure space is properly used.

You should run the compress function periodically to ensure you don't have any dangling headings on your disk and the space is properly used. This is especially important when you have made a lot of deletions or changes to your data. Make sure you backup your disk before you compress it, just in case.

### Remove your data disk and place the backup program disk in the drive **BEFORE** you write the new file.

Make a new disk, change **Data** drive and **EXit** to the main menu were all discussed earlier. Remember that when you make a new data disk, the blank is formatted first, erasing any material on it. If you make a new data disk after you've been working with another, make sure you choose **N** for use new data disk **before** you attempt to read or write from the disk or you may cause an error.

While it's not on the menu, **CTRL W** writes a new startup configuration file to your **program**

## MERGE FILES

disk. Make sure you remove your data disk and place the backup program disk in the drive **BEFORE** you write the new file; if you write it to your data disk, you will damage the data permanently!

A special feature of **HomeFind** is the merge files; it creates a special file on a regular **Atari** diskette which can be read into your document from **HomeText**. Press **CTRL C** in the Functions menu; the program will ask you for a search request; answer with a valid query: Subject, Tag or Subject's Tag. The search response is saved in memory; only as many objects as can be stored in memory can be saved as a file. Then give a disk filename. **HomeFind** will write to disk all of the Objects associated with your query.

Later, when using **HomeText**, you can insert 'merge tokens' into the text in order to call up the objects saved in this file. This is explained in more detail in the chapter on **HomeText**. If you want to create a mailing list, then use 'address' as your search request; the entire range of addresses on your disk (Bob's address, Sue's address, Mike's address, etc.) will be saved in the file. Records are printed into your **HomeText** documents in the order in which they are saved.

You can use other database managers to create valid merge files, as long as certain rules are followed: the entire record (not file) is no more than 80 characters long, multi-line entries are separated by ASCII character 29 (the down arrow) and each record is separated by one and only one carriage return.

# ATARI HOMEFIND

## Quick Reference Guide

### SCREEN CONTROL KEYS

To change screen color:

**SHIFT CTRL ↓** (down)

**SHIFT CTRL ↑** (up)

To change screen brightness:

**SHIFT CTRL <**

**SHIFT CTRL >**

To change text brightness:

**SHIFT CTRL I**

To toggle the key click sound:

**SHIFT CTRL TAB** To change the left hand margin:

**SHIFT CTRL M** (toggles between 0 and 2)

(this takes effect at the first RETURN typed)

To save these changes on your program disk:

**CTRL W** (make sure your **data disk** isn't in the drive!) This will make your changes the new startup defaults.

### EDITING KEYS

To delete the previous character:

**DELETE/BACK S**

To delete the previous line:

**SHIFT-DELETE/BACK S**

### CONSOLE KEYS

To toggle the printer on and off:

**OPTION**

To enter the Functions menu:

**SELECT**

### INFORMATION SYNTAX

To enter information:

Subject's Tag's Object

Example: David's bicycle's red

To retrieve information:

Allowable pronouns: Who's, what's where's, when's

Single Item query:

pronoun + subject, or

pronoun + tag, or

pronoun + object, or

simply enter the single word

Multiple item query:

pronoun + subject's tag, or

pronoun + tag's object, or subject's tag (no pronoun), or

tag's object (no pronoun)

Analogous query based on object:

pronoun + object + tag, or

object + tag (no pronoun)

### In the Functions Menu

To create a new data disk:

**M**

To change the drive number:

**D**

To copy the data disk:

**B**

To change to a new data disk:

**N**

To list all subjects:

**S**

To list all tags:

**T**

To compress the data disk:

**K**

To exit to the main screen:

**X**

To create a merge file for **Hometext** use:

**CTRL C**

# CHAPTER 5

## HOMETERM THE TELECOMMUNI- CATIONS PROGRAM

Computer-to-computer  
communications

Telecommunication means computer-to-computer communication over the telephone line. You link your computer with one or more others so that you can send and receive programs or 'electronic mail', transmit or read information, chat with other users, store files, do electronic shopping or banking, read on-line magazines or even an encyclopedia; all those things you do locally, except over a distance with a computer and a modem.

**Modems** (for modulator/demodulator) are the devices which link computers, translating the electronic signals from your computer into an audible tone which is then transmitted along the phone lines. The tones are translated back into recognizable signals by the modem at the other end. If you have ever lifted your telephone receiver while transmitting or receiving a file, you will have heard the sound of the modems 'talking'. This isn't a recommended practice however - it almost always causes your data to become scrambled or garbled when you pick up the receiver to listen.

Modems are serial devices - meaning they transmit data sequentially, one bit at a time, turning the eight bits of a character into a stream of bits which follow one another. Your computer re-assembles the bit stream back into eight bit characters when it receives the data from the modem.

Modems such as the **Atari 1030** and **835** plug either directly into the serial port on your **Atari** or disk drive or into the **850** interface which has the necessary serial ports, called the **RS-232 outlets** (RS-232 use a 'standard' for pin connections, so you can use almost any modem with the proper cable for your **Atari**). The **850** plugs into the serial port itself. You must turn on your modem first, then **850** (if you are using one), then disk drive, before you turn on your computer. **HomeTerm** can tell which type of modem you are using.

**HomeTerm** works with the **MPP-1000C**® modem as well - a modem which plugs directly into the joystick ports. To set up your **HomeTerm** program for the **MPP** modem, read the last section in this chapter.

None of the features described work properly without a modem or interface attached.

## BASIC TECHNICALITIES

### Baud

### Duplex

The first thing you'll need to use this program is a phone number of a local bulletin board system, users group, on-line network such a **CmpuServe** or a friend who has a modem hooked up to his or her computer. This will allow you to test the features of **HomeTerm** and see what telecommunication is all about. None of the features described below work properly without a modem or interface attached, so make sure they're all on properly before trying **HomeTerm**.

Telecommunications isn't difficult or very complex, but it does require that you understand a few technical terms and how it works in order to use it properly. You will probably have to try the program out several times to get the hang of it.

The first thing you need to know is the speed of communication; both computers have to talk to each other at the same speed. This is measured in *baud*. Most home computers transmit at 300 baud, which translates to roughly thirty characters per second or three hundred words per minute. Many newer modems can switch to 1200 baud - four times as fast. People used to use 110 baud - a very slow speed - before faster modems became cheaper to buy. Many popular modems - the so-called 'smart modems' - can work at several speeds and can tell what speed the other computer is working at and adjust to it. Check your modem manual for details. You should try to make sure you know what speed the other computer is transmitting at before you call it up.

The next item is *duplex*; modems are capable of transmitting data in both directions at the same time; in **full-duplex** state (sometimes called **echo-plex**), they do just that, just like two people talking at the same time on a telephone. Your screen shows you what the other system echoes back to you. Full duplex is the faster mode. In **half-duplex**, you transmit only one way at a time (say, to the other computer), then the other way (back to your computer), like a CB radio. Your screen shows what you type, without an echo to your screen. When you're in half-duplex and the other system is in full, you get a doubling of characters, so if you type "HELLO", you end up with "HHEELLLLOO".

Which duplex do you need? It depends on what the other person is also set at! There are no set rules for duplex; you will have to try one or the other if you have any troubles communicating. The duplication on the screen of any characters you type is one good indication that you need to switch duplex. Often switching your duplex will cure any problems. Some modems have a switch to set the duplex mechanically; make sure the switch setting conforms to the mode you need. Experimentation will show you what's necessary.

'ASCII'  
 ATASCII  
 Vidtex  
 XModem

HomeTerm supports all four.

Which method you should use  
 will depend on the computer at  
 the other end of the line.

There are several choices involved in communications and transmitting files. The first step is to establish what type of computer you are communicating with. Most computers converse with each other in 'ASCII' code - straight characters; numbers, letters, punctuation, without control or escape codes or inverse characters. When two **Atari** talk to each other, they can send the codes, inverse characters and special symbols in **ATASCII**. **CompuServe** has special cursor control features it supports, using a systems called **Vidtex**. **HomeTerm** supports all three methods. You should consult your **Atari** manuals for a full explanation of **ASCII** and **ATASCII** and the difference between them.

Many bulletin board systems - particularly those using a **CP/M** computer or **CompuServe** (for file transfers only) - use a file transfer protocol method designed and developed by Ward Christensen, called the *Xmodem* protocol. **HomeTerm** also supports **Xmodem**. Which method you should use - **ASCII**, **Atari**, **Vidtex** or **Xmodem** - will depend on the computer at the other end of the line. You will usually be able to talk or chat, read mail and information without knowing which to use since you will be doing so in **ASCII**, but it is important to use the right method when moving files. You may have to experiment a bit first to get it right.

**HomeTerm** reserves a section of memory called a *buffer* for use when transferring files. When you send a file, as much of it as can be stored in the buffer is loaded in , then transmitted to the other computer. When the buffer is empty, it fills up again and continues doing this until the entire file is sent. When you receive a file it works in reverse; as much of the file as possible is stored in the buffer before being saved to disk, then once the buffer is empty again, it starts to fill up. During the times the disk is being used, the computer doesn't transmit. It sends a signal to the other computer, telling it to wait until the operation is finished, and when done, sends another signal to start up again. The buffer is discussed in more detail later.

There are two other areas which are important but not usually critical to home use. One is *parity*; when you transmit in **ASCII**, a *start bit* is added to the front of the character - a zero - to tell the host system to expect an **ASCII** character. After the letter is sent, a parity bit follows. This is either a one or zero to make the sum of the bits in the character sent - including the parity bit - come out either odd or even. Older systems used to use parity checking to ensure the transmission was correct. **HomeTerm** ignores parity, since it isn't used much on modern systems anymore.

The final item is *stop bits*. After each character has been sent, one or two bits follow as a 'flag' to tell the receiving system that the entire character has been sent and the next bit



## USING HOMETERM; THE SCREENS

received will be the start bit of the following character. **HomeTerm** uses one stop bit, since most systems nowadays support just one rather than two stop bits. You can't change either the no-parity or one stop bit protocol, but you won't often find systems which need or use anything else.

After you load **HomeTerm** from the main menu, remove the program disk and place it in a safe location. You should place a formatted disk in one of your drives to store programs you wish to retrieve from another (or *host* computer, or a disk with files you wish to send to another computer. Your first screen is the 'interactive mode' screen; this is the screen you see when calling another system, when transferring files, when chatting online. There are three screens in **HomeTerm**; the others are the Functions menu screen and the Files menu.

The bottom two lines tell you the status of your link to the other computer. You can see current size of your memory buffer (7220 bytes), the baud rate (300), the duplex (full) and the translation mode (ASCII). The status lines will also tell you what file activity you're performing and the name of the file. Finally, the center box shows a timer you can set in the functions menu screen to keep track of how long you've been online (especially useful on systems which charge for their services!).

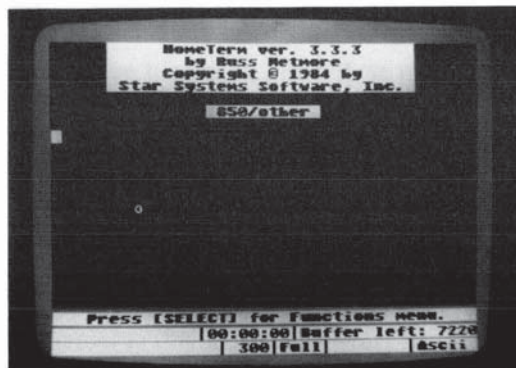


Fig. 10: Interactive HomeTerm Screen



Fig. 11: HomeTerm Function Menu Screen

- 43 Going to the functions menu won't disconnect you from the other computer.

Not every feature of HomeTerm is listed on the screen.

## FIRST STEPS BEFORE PLACING A CALL

The B key toggles between 300 and 1200 baud.

Press **SELECT** to go to the Functions menu screen. When you're online with another computer, going to the functions menu **won't** disconnect you from the other computer. However, if you're talking to someone, it's only good manners to tell them you're leaving for a moment, since you can't talk to them from the functions screen.

There are actually two different function menu screens; one for a regular modem, another for the **Atari** 835 or 1030 modems. These **Atari** direct connect modems only support 300 baud. You do not need and cannot use the cartridges which come with these or other modems (Telelink or any other software)!

Not every feature of **HomeTerm** is listed on the screen; only the most commonly used are shown, so you may have to refer to the quick reference card for such things as changing the screen colors. Let's look at the features shown on the screen, one at a time, while we go through the process of 'signing on' to a bulletin board, or calling another computer.

If you are using a modem through the 850 interface which supports more than one baud rate, you need to make sure that you are calling at the right speed (the 835 and 1030 modems work at 300 baud only). The **B** key toggles between 300 and 1200 baud. Try it and see it change on the status line at the bottom of the screen. If your modem can transmit at 1200 baud and you know the computer at the other end can as well, then use 1200. Otherwise, 300 baud is the most common speed used. You can't change your baud rate once you have connected to another computer.

You select a duplex mode with P.

## PLACING OR RECEIVING A CALL

You should start in **ASCII** mode when placing a call; you can change translation modes later when transferring files. One of the reasons for using **ASCII** to dial is that your modem will accept commands in **ASCII**, but may not take them in **ATASCII (Atari)** mode. If you can't get the modem to respond, try pressing **SHIFT-CAPS/LOWR** to set the output to uppercase, then re-entering your commands. Pressing **CAPS/LOWR** alone releases the shift lock.

You select a duplex mode with **P**. Start out with full duplex; if you have problems, you can change once you're connected. If you're in half duplex mode and you get "doubled" keystrokes on your screen, switch to full duplex. Now you're ready to make a call. Press **RETURN** to switch to the interactive screen.

In the interactive screen, you type the commands to dial a number. If you're using an old style 'acoustic coupler' modem, or one which doesn't have 'autodial' capability, you can still use **HomeTerm**, but you'll have to manually dial the number. Your modem documentation will tell you how to dial and what you need to enter. The **Hayes** and other 'smart modems' use a command like this: (refer to your modem manual for details)

**ATDT555-1234 «RETURN»**

This says "attention modem (**AT** - tells it a command is coming), touch-tone dial (**DT**; if you were using a rotary phone, you use **PD** for pulse dial) the number which follows (555-1234)". When the modem on the other end of the line answers, you may see a message on your screen, telling you that you are connected (such as 'carrier detected' or 'connected' (or you may have to type something to get the other computer to recognize you (**RCP/M** systems require a **RETURN**, **CompuServe** needs a **CTRL C**). When you're calling a friend, you may see nothing at all and may be able to type without needing to send other signals.

If you have a modem which can answer calls (an 'auto-answer' modem), then set it to do so (this means setting the proper switch in the **Hayes** or giving the modem the proper command in others). In the functions menu for the 835 and 1030 modems, you will see the **A** command which will allow you to manually answer the phone. Press **CTRL A** when the phone rings in order to answer it and go online.

## THE INTERACTIVE, OR CHAT MODE

Now that you've made connection, whatever you type is automatically transmitted to the other computer, as well as to your screen. When you're online with a bulletin board or electronic database, you should end each entry with a **RETURN**. When you're talking back and forth with

a friend, you should end each line or sentence with something like **GA** for 'go ahead' and three periods (...) for 'more to come', so that they know you're finished and can respond. Wait until you see their end-of-message sign **GA** before you begin typing your own reply. Another way to signify who's talking (especially when saving the conversation to a disk file for later reading) is for one of you to use the **TAB** key before starting your line.

#### Word wrap.

There are several things you can do while in the interactive mode; change screen colors, text and screen brightness, adjust screen margins and more. These are explained in the quick reference guide. Some features won't be as obvious as others; **word wrap** for one. When your text comes to the end of the screen, it breaks at the last word and continues on the line below, so the words aren't broken in the middle. This isn't always necessary or wanted - say when capturing a file. To turn off word wrap, use the **SHIFT CTRL W** toggle. The screen will tell you what you've done. Word wrap is convenient when reading files formatted for 80 column displays.

#### If you're not the best typist in the world.

If you're not the best typist in the world, you sometimes make mistakes in your input and get the wrong response. **HomeTerm** has an edit window, toggled by **SHIFT CTRL E**. When it's on, you see a line cut across the bottom of the screen. Everything you type appears in this window, but isn't sent to the other computer or the modem until you press **RETURN**. The edit buffer can hold up to 120 characters; some systems won't accept that much text at a time without a carriage return - experiment to see what it can take.

When you press **RETURN** everything from the beginning to the end is sent, minus any trailing blanks, no matter where you placed the cursor when you pressed **RETURN**. You can use the **CTRL** key, the arrow keys, and the **TAB** key or the **DELETE/BACK S** key to edit the window before you send anything. The **CTRL CLEAR** keys will clear the screen once **RETURN** is pressed. The editing feature is particularly useful in **CompuServe's CB** section.

#### To save for later press the **OPTION** key.

#### To save to disk, press **SELECT** and the **D**.

Sometimes when you're talking online or reading messages or getting information, you see material you want to save for later. To open the buffer to begin saving what's appearing on the screen, press the **OPTION** key. The status line on the bottom tells you that capturing is on (and the screen border turns red). Press **OPTION** again turns the capture buffer off. You can start and stop saving data into the buffer any number of times before saving, as long as there's room in the buffer for it. When you want to save the buffer to a disk file, press **SELECT** for the function menu and the **D** to dump. **HomeTerm** will ask for a filename then. You can choose to dump the buffer to the printer (**device P:**) or the screen (**device E**), using **CTRL I** to pause and

restart the output. The screen device can be used to review the buffer's **Capture and Upload** a file is the normal way to receive (capture, or download) and send (upload) a file, respectively. You will be asked for the filename; if you're using more than one drive, specify the drive number, for example: **D2:TEST.TXT**. You can also ignore uppercase in the filename, so **2: test** is treated like **D2:TEST** by **HomeTerm**, without problems. The program assumes you mean **D1**: if you don't specify a drive. If the file you intend to send isn't on disk, you'll get an error message. Press any key to continue. You can get a disk directory by pressing the numbers one to four.

When you are talking with a CP/M RCP/M or Christensen (Xmodem) use Receive and Send.

When you are talking with a CP/M or RCP/M system, or any system which uses the Christensen (Xmodem) protocol (such as **CompuServe** for file transfers; often listed on the system's opening screens), you use **Receive** and **Send** files, rather than **Capture** and **Upload**. In both cases, you can simply press **RETURN** when asked for a filename and cancel the operation before it gets started. To begin sending or receiving a file, press **SELECT** to return to the interactive mode and the press **START** to initiate the process. Sometimes you have to type the command for the host system to send the file but press **START** before you press **RETURN**, otherwise you miss the first few bytes that are sent. **S** and **R** automatically set the correct duplex and translation modes for correct transfer; you don't need to set them manually.

Using the Christensen Xmodem protocols.

Using the Christensen Xmodem protocols, which breaks a file into 'records' for transmission, the receiver waits 10 seconds for the first byte of a record being sent or one second between each character in a record. If nothing is received in this time period, the system aborts the procedure *after* retrying ten (10) times. The sender has only one time-out; when nothing has been received in acknowledgement for one minute.

Sometimes during a transfer of a file, you need to quit. To do this, press any console key (**START**, **SELECT** or **OPTION**). This usually works, but it assumes the other system can recognize the cancel signal - no problem if you're talking to another **HomeTerm** user. Some systems which use the Xmodem protocol **can't** recognize the cancel, so you have to wait it out until the remote 'times-out' or the transfer is complete.

Before you send a file, you have to make sure you have the translation mode (**T** and **A**) set properly. In **ASCII** and **Vidtex** modes, there are several special key combinations to give you special characters or commands (see the reference card). Once you begin to send or receive a file, you will see your data presented on the screen as it moves between computer and modem. Once a file has been sent, you can clear the buffer in preparation for more transfers (**CTRL-C**). You cannot send or receive more with an intact buffer.

In **Vidtex** mode, true cursor control is implemented, but you must go into the **CompuServe DEFAULT** program and choose the terminal type of 'VIDTEX' with a 38 or 40 character by 21 line screen in order to use it properly. **Vidtex** has clear screen and cursor position features not used in other systems. This is described in more detail, along with the **DEFAULT** program use, in your **CompuServe** manual.

If you want to print a file rather than save it to disk, give it a file name of **P:** for output, so the copy goes directly to the printer. The carriage return/linefeed (**CR/LF**) combination is always sent to the modem or the device, automatically at the end of a line (**EOL character**).

## DISK FEATURES

### HomeTerm mini-DOS

You've already seen that the numbers 1 - 4 produce a directory of that drive, if connected. There are more disk related features available in **HomeTerm** - there is a **mini-DOS** function which allows you to perform the most important **DOS** features without leaving **HomeTerm** or going off-line!

Press **CTRL F** for the files sub-menu. It has several functions to allow you to manage your disks and files properly; copy, delete, rename, lock and unlock (wildcards are allowed) files, get a disk directory and format a disk. These features are all explained in your **Atari DOS** manual; consult that manual for more information. For other **DOS** features, such as copy an entire disk, you'll have to disconnect, leave **HomeTerm** and boot up **DOS**.

**Copy** uses the capture buffer to copy files. You will be asked if the program can use the entire buffer; if you answer **N**, the program will use only the available free memory, which means more disk swaps with one drive (the routine needs at least 1024 bytes of buffer space to operate). You can also copy a file to the printer (**device P:**) or any other device (**E:**, **S:** or **C:**) you wish. You can use a wildcard in copy, but only the **first** filename which matches will be copied.

With **rename**, you can specify any valid drive for the first name, but the new name cannot have a drive specification (the file is assumed to be on the same disk). Wildcards are allowed.

One precaution: make sure you don't have your program or data disk in the drive when you press **F** to format the disk! If you choose a selection but change your mind, press **RETURN** instead of answering with a filename and the command will be cancelled.

Make sure you don't have your program or data disk in the drive when you format the disk.

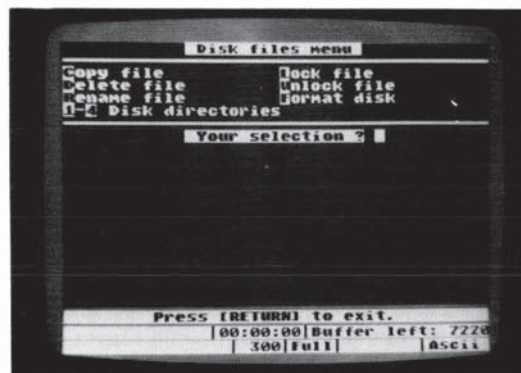


Fig. 12: Disk Files Function Menu

## SPECIAL FEATURES

You have noticed several other commands on the functions menu so far we haven't discussed. The first is the **timer**; set with **CTRL S**. The timer is a 24 hour real time clock. You can enter the current time and it will keep the clock running on the status line of the screen. You can reset the time to 00:00:00 by pressing **CTRL R**. This is useful to keep track of the time you've spent online when using a system with either a time limit or a fee for usage. You must turn the timer on to get it working after you've set it; press the **Atari** key to toggle the timer on or off (in either screen).

### The buffer.

When you capture data using the **OPTION** key, or send or receive a file using a function menu choice, you use the buffer. There is only one buffer and in order to use it for other purposes, you must clear it; press **CTRL C**. You can also simply load or receive a file but change your mind and clear the buffer without either saving it or sending it. The buffer is usually cleared automatically after a file transfer.

### To add delays.

Sometimes you need to add delays between characters when transmitting a file, so that the other computer has enough time to fetch and display each character. **CTRL D** sets the delay in

increments of 50 milliseconds. Just type in the number you need to add to each line. Usually between 10 and 50 delay increments are sufficient; delays greater than fifty are seldom necessary.

## MACRO COMMANDS

To 'automate' your dialing and logging sequence.

**Macros** are simple keystrokes which allow you to transmit several commands or a long string of characters (up to 70 characters total) without having to type the entire line in each time. You can best use them to 'automate' your dialing and log-on sequence to such systems as **Compu-Serve**, where a long keying process is involved. You can have up to ten macros at a time and store them to disk, along with several other parameters, in a special configuration file.

Macros are transmitted in the interactive mode by pressing **SHIFT-CTRL** and the number of the macro - zero through nine (0 - 9). To abort a macro, press any key while in operation (you can tell a macro is still working because the screen itself changes to green). To get a list of your active macros, press **SHIFT-CTRL**

Macros are defined in the function menu by pressing **CTRL M**. You will be shown the current list and asked which one you wish to change. If you have entered data for that macro already, you will get an edit window which allows you to change a few characters if necessary, without having to change the entire line. Control characters appear in inverse **ASCII**.

To write a macro, you simply type in the characters and commands you want to send, ending the sequence with a **RETURN**. A carriage return and line feed (**CR/LF**) is sent at the end of each macro unless the last character is **ESC**.

Special characters used in macros.

There are several special characters used in macros. These are:

1. **CTRL C** Toggles the capture buffer open and closed
2. **CTRL M** Sends the end-of-line character.
3. **CTRL P** Pauses for two seconds before continuing
4. **CTRL U** "Use" the macro whose number follows immediately. This is like the **GOTO** command in **BASIC**; it allows you to combine several macros together. Using **CTRL U**, you can link several macros together into a 'giant' macro with many more commands than one along would permit; almost 700 characters can be combined in one mega-macro this way.



5. **CTRL W** Wait for the next character you specify to appear from the host. If the character hasn't appeared in 30 seconds, the macro is aborted.
6. **ESC N** Makes the next character 'verbatim'; necessary to transmit control codes rather than interpreting them as a command.

Here's an example of a macro used to call up and log on to **CompuServe**. The `` character means 'CTRL' and the square brackets —[ ]— aren't typed in—they're only shown here to differentiate between control codes and other characters.

```
ATD555-1234[^P] [^M] [^W] T [^P] [ESC] [^C] [^W]: 77770,111 [^M] [^W] : FREE-DEMO
```

This macro breaks down as follows:

1. ATD555-1234[^P] [^M] Call the number 555-1234 and pause for two seconds to allow the modem to catch up to the input stream.
2. [^W] T [^P] Wait for the 'T' in the 'CONNECT' prompt from the modem then pause again while the sign on message is being displayed.
3. [ESC] [^C] Send a **CONTROL C** so that **CompuServe** can acknowledge the call. The ESC tells **HomeTerm** that the **CONTROL C** is to be transmitted to **CompuServe**, not taken as a command.
4. [^W]: 77770,111 waits for the final ':' in the **CompuServe** 'USER ID:' prompt, then sends the users ID code, followed by the end-of-line character.
5. [^W]: FREE-DEMO waits for the final ':' character in **CompuServe's** 'PASSWORD:' prompt, then sends the password.

You can save your screen color and brightness choices to disk, along with your current list of macros, the current baud rate, key click, duplex mode and translation type as a configuration file, while in the function menu. This is done by pressing **CTRL W**. The default configuration file which comes with the program is called **HOMETERM.SET**. To save your own default file under that name (replacing the one on the program disk), press **CTRL W**. The default configuration file is always the one which boots up with the initial program load.

A carriage return is always sent after a macro is completed, except when the last character in the macro is the **ESC** key.

## CONFIGURATION

## SIGNING OFF

## THE 835/1030 FUNCTIONS MENU

To save a differently named configuration file, press **CTRL N**. You will be asked to give the filename. You can store as many as you want, as long as you give them each different names and you have enough disk space.

To load a different configuration than the default once you're in **HomeTerm**, press **CTRL L**. You will be asked for the name of the file to load. Using different configuration files, you can save several different sets of macros for use with different online systems.

The configuration file commands are not shown on the function menu screen. They only work in the function menu, not in the online or interactive screen mode.

Once you've signed on to a system, you'll want to explore it, test what it has to offer, download (capture) files or programs, read and leave messages or electronic mail (often called **Email**) - whatever the system allows (most bulletin boards and databases have menus for you to choose from). When you're finished, you'll have to sign off. Usually the system has a menu choice for quitting; sometimes it's a single word like **BYE** or **QUIT**. Check with the system functions menu before you continue, so you know ahead of time how to leave properly.

If your modem is still hooked up, you will need to disconnect it (sometimes manually) or place it 'on the hook' so that your phone line is clear again and the modem doesn't answer when someone calls! The **Hayes Smartmodem** uses **ATH** as the 'hang up' command. Check your modem manual for details.

There are some changes for the **Atari 835** and **1030** modems which reflect the different capabilities of these devices. Since they are only 300 baud modems, you no longer have a baud rate selector. In addition to the other features, you have **H** for hang up phone - this disconnects your system from the line.

You have **CTRL A** for answer phone. This isn't an 'auto-answer' mode like smart modem - there is no simple way to detect a ring automatically with these modems. Instead, it picks up the phone and puts the modem into answer mode (**Atari** modems are usually in originate mode). To do this let the phone ring at least once, then press **CTRL-A** to answer it.

**M** is to make a phone call. It pulse dials a number (rather than touch tone dialing) which you type in when asked - up to 15 digits, including punctuation. Pressing **SELECT** during the dialling process interrupts it and returns you to the Functions menu. If you make a connection,

## USING THE MPP MODEM

Note: Only the "small" R:  
Handler from MPP can be  
used with HOMETERM.

you enter terminal mode right away. Other than these features, everything else works the same.

Owners of this modem (which connects through the joystick port) can also use **HomeTerm**. First you must obtain the **R: Handler** disk from your **MPP** dealer. This is a program which emulates the **RS-232** handler in the 850 interface and allows you to use the **MPP** modem with a variety of other software. This method, by the way, works with almost any custom **R: Handler** which loads below memory location 9920 (\$26C0), and that also properly conforms to the 850 specification.

Next, copy the **AUTORUN.SYS**, **HOMEMENU.OBJ**, **HOMETERM.OBJ** and **HOMETERM.SET** programs onto a formatted disk with **DOS** files on it. Rename the **AUTORUN.SYS** program **RUN.SYS** (any name will do; this is temporary so that we don't have two files of the same name on the disk or overwrite one). Copy the **R: Handler** (probably also called **AUTORUN.SYS**) onto this disk as well. Choose **DOS C** or copy command to append two files together. After **C** type: **RUN.SYS,AUTORUN.SYS /A**. This will append the **RUN.SYS** program to the end of **R: Handler** as the combined file with the name **AUTORUN.SYS**. Erase the file **RUN.SYS** from the disk.

The reason we put **HomeTerm** on a separate disk now is that we don't have enough space left on the **HomePak** disk for the new **AUTORUN.SYS** with the other files. The program will load and work properly, but remember that you cannot load **HomeText** or **HomeFind** from this menu screen, even if the choices are still there.

## ATARI HOMETERM QUICK REFERENCE GUIDE

In the interactive screen mode:

To change the screen color:

SHIFT - CTRL ↓ : up  
SHIFT - CTRL ↑ : down

To change screen brightness:

SHIFT - CTRL { : down  
SHIFT - CTRL } : up

To change text brightness:

SHIFT - CTRL + I

To toggle the key click:

SHIFT - CTRL + TAB

To toggle the Edit window:

SHIFT - CTRL + E

To toggle the left margin shift:

SHIFT - CTRL + M  
(either 0 or 2 spaces)

To toggle the word-wrap  
feature:

SHIFT - CTRL + W

To toggle the real time clock  
on/off:

**Atari key** (set and reset the  
clock in the function menu  
screen)

### MACROS:

To initiate (transmit) a macro:

SHIFT - CTRL + 0 through 9

To see the list of macros:

SHIFT - CTRL + 

### CONSOLE KEYS:

To toggle capture buffer on/off:

OPTION (if no other file transfer mode  
has been selected)

To go to the function menu:

SELECT

To begin a file transfer operation:

START

### SPECIAL KEYS:

To lock the keyboard in uppercase only:

SHIFT - CAPS/LOWR

To release the shift lock:

CAPS/LOWR

To tab every eight spaces:

TAB

To ring the bell on the host computer:

CTRL + G (ASCII and Vidtex modes  
only)

### To clear screen:

CTRL + L (ASCII and Vidtex modes  
only)

To send a left curly brace ({}):

CTRL + ; (ASCII and Vidtex modes  
only)

To send a right curly brace (}):

CTRL + ← (ASCII and Vidtex modes  
only)

To send a reverse apostrophe:

CTRL + 9 (ASCII and Vidtex modes  
only)

### IN THE FUNCTION MENU:

To toggle computer and modem for Atari  
to Atari mode:

A

To toggle between 300 and 1200 baud:

B

To prepare to capture an Atari or ASCII  
file:

C

To dump present buffer to device and  
filename:

D

To change the current filename:

N

To toggle between half and full duplex:

P

To prepare to receive an Xmodem file:

R

1-4 disk directories

- 54 To prepare to send an Xmodem file:  
S
- To select file transfer translation mode:  
T
- To prepare to upload an Atari or ASCII file:  
U
- To exit to the Home Pak menu:  
X
- To clear the buffer:  
CTRL + C
- To set the output file delay rate:  
CTRL + D (each increment is 50 ms)
- To select the disk file menu:  
CTRL + F
- To load a configuration file:  
CTRL + L
- To change or edit macros:  
CTRL + M
- To write a configuration file:  
CTRL + N (you give the filename;  
screen parameters and macros saved)
- To reset the timer clock to all zeroes:  
CTRL + R


- To set the timer clock:  
CTRL + S (you must enter all three  
time fields)
- To write the default configuration file:  
CTRL + W (writes D1:HOMETERM.SET)
- 835/1030 modems only:
- To hang up the phone (disconnect)  
H

- To answer an incoming phone call (listen  
for the ring first)  
CTRL + A
- To make an outgoing phone call  
M

#### IN THE DISK FILES FUNCTION MENU:

- To copy a single file:  
C
- To delete a file from disk:  
D
- To lock a file:  
L
- To rename a file:  
R
- To unlock a file:  
U
- 1-4 disk directories

#### MACRO COMMANDS:

- To invoke (transmit) a macro:  
SHIFT - CTRL + 0 through 9 (in inte-  
ractive screen  
mode)
- To list macros:  
SHIFT - CTRL  (interactive mode)
- To edit or change macros:  
CTRL + M (function menu mode)

#### Commands or characters within macros:

- To toggle buffer open/closed:  
CTRL + C
- To send a carriage-return (Return)  
character:  
CTRL + M
- To pause two seconds:  
CTRL + P
- To use another macro:  
CTRL + U + 0 through 9
- To wait for the next character before  
proceeding:  
CTRL + W + character
- To make the next character verbatim:  
ESC

## USING HOMETERM ON COMPUERVE

### HOW TO USE THE ATARI SPECIAL INTE- REST GROUP (SIG)

SIG\*ATARI - the ATARI  
Special Interest Group

**IMPORTANT** - Its perfectly all  
right to tell others your USER  
ID number but **NEVER** tell  
anyone else your private  
password.

To access SIG\*ATARI.  
GO PCS-132.

Enter a question mark "?" or  
the word "HELP" and the  
system will display a list of  
valid commands.

With HOMETERM, the entire universe of ATARI BBS systems and commercial data services are just a few keystrokes away. Perhaps the largest and most widely known of these is SIG\*ATARI - the ATARI Special Interest Group located on the CompuServe Information Service, (CIS). SIG\*ATARI is more than a simple BBS (Bulletin Board System). Among its many features are its powerful and versatile user forum. This features a sophisticated message transfer system and an online, real-time conferencing facility that permits over 100 users to converse simultaneously or in private with others all across the nation. As well there are 9 databases with over almost 1,000 public domain files available for downloading at no extra charge. (This represents over a megabyte worth of free programs). Membership in SIG\*ATARI is available to anyone with a CompuServe ID, with no additional charges beyond the normal connect rates.

To access the SIG just sign on to CompuServe by following the log-on directions provided with your CIS starter kit. (These are available at most major computer retailers.) After dialing in, CompuServe will prompt you to enter your USER ID:. This ID, commonly referred to as a PPN, is a 2-part number that looks like 77777,7777. Next enter the password provided with your starter kit. Don't worry if you can't see the password as you type it in. This is done for security reasons so anyone looking over your shoulder can't access your account. **IMPORTANT** - Its perfectly all right to tell others your USER ID number, also known as a PPN. In fact, they need to know this number to send you any EMAIL (Electronic Mail) or other messages on the system. Think of this number as just like your street address for postal mail. **NEVER, NEVER** tell anyone else your private password. This is just like the key to your house. Never give it to strangers!

Once online with CompuServe, you will be "positioned" at the "TOP" page of the VIDEO-TEXT service. CIS is structured into a "paged" format where each "page" is denoted with a 2 or 3 letter abbreviation and a number. You may navigate around the system by stepping thru the menu selections until you arrive at the page with the information or service you desire, or you may go directly to any page as long as you know the page number. To access SIG\*ATARI, you may start on page CIS-1 and step thru the various submenus until you get to page PCS-132 or you may save time and money by jumping there directly with the command: GO PCS-132 from any other page in the system.

The first time you access SIG\*ATARI, you will be greeted by the NEW MEMBER MENU. By selecting the appropriate menu choice, you can read a brief description about the purposes and features of the SIG, list out a LONG file of SIG instructions, (it's a good idea to open the capture buffer on HomeTerm and then save this text to disk or printer), enter as a non-member,

To see a list of the available section names, type the command: SN.

or sign up for SIG membership. There are no additional fees for membership, but only members may use all the features of the sig. To join, you must enter your FULL, REAL NAME when prompted. Use of pseudonyms (handles) or first names only is not permitted. The rest of the signup process is automatic and takes just a few seconds. You need only go thru this signup process once. On future visits, members pass directly into the message section of the sig.

Before we examine the different features of the SIG program, a discussion of the two operating modes available is in order. SIG\*ATARI can be accessed in "command mode" or "menu mode". In MENU mode, the user may select a function by number from an abbreviated menu of choices or type in the actual command itself. In COMMAND mode, the system simply uses the single word prompt "FUNCTION:" and expects the user to type in the proper command. In either mode, you must terminate your input with the ◀RETURN▶ key. New users generally use MENU mode while they learn the system commands, then change to COMMAND mode to save time and connect dollars after a few weeks of practice. Don't be afraid to experiment and abandon MENUs for the more efficient COMMAND mode. If you can't remember the proper command or the exact command format when prompted, simply enter a question mark "?" or the word "HELP" and the system will display a list of valid commands. In many instances, you may obtain additional help on a SPECIFIC command by typing: ? xxx, where "xxx" is the command in question. A system as powerful and complex as the SIG program on CompuServe, by its very nature, accepts a large number of system commands in a variety of different command formats. To complicate this situation, CIS is constantly expanding and refining these commands. As a result, system documentation is often outdated faster than it can be printed. In some cases, the commands have just been renamed and the system will accept both the old and new names. Often, old commands are no longer documented online, but are still valid. As new commands are added, the online help is updated as soon as possible, but as this is not under the control of the sysops, the updates are 'irregular'. In other words, if the system doesn't respond exactly as you would expect, it may not be your fault! The information and programs available in SIG\*ATARI may be accessed by individual section topics. To see a list of the available section names, type the command: SB. Additional information for each section # is available by typing: X# (where # = 0 to 7). While accessing the message sections of SIG\*ATARI, you may scan the message headers or read the full text of the message. When scanning, the header will display the name of the SENDER, the RECIPIENT, the SUBJECT of the message headers in forward

For a detailed description of all the scanning command variations, type: ? S

To view the online instructions for reading messages, type: ? R

You may enter the SIG\*ATARI (CO)Inferencing channels by typing: CO (or CB).

or reverse chronological order, by specific subject threads, and even scan and mark individual messages for later reading. You may choose a "Quick Scan" option which shows the subject information only. For a detailed description of all the scanning command variations, type: ? S (for scanning) or ? QS (quick scanning) at the FUNCTION: prompt. There are similar command variations for reading messages. You may elect to read messages in forward or reverse order, by subject threads, by WRITER, by ADDRESSEE, only specifically marked messages, or only NEW messages written since your last visit. To view the online instructions for reading messages, type: ? R (at the FUNCTION: prompt). After reading a message, you may immediately elect to (RE)ply to the writer, and the system will automatically address the reply for you. When reading a message thread, you may choose to RE-READ (RE) a message or even back up a step and READ the PREVIOUS message (RP).

As you might expect, to see a list of all valid reply options, type a "?" when prompted for a response. To initiate a new message to another member or sysop, use the "L" command. You will be prompted for a SUBJECT (23 chars. max) and an ADDRESSEE. If you wish the system to automatically notify the other party of a waiting message when they next enter SIG\*ATARI, you must include their PPN when prompted for a name. The only exception to this is a message to the head sysop. He will be flagged to any message that includes his PPN -or- the name "SYSOP". You cannot send a private message to another sig member, but you may send a private message to the primary sysop if you address it TO: "\*SYSOP". (With the \* but without the " ").

When reading or scanning messages in SIG\*ATARI, you may limit yourself to a specific section by typing the command: SS# (where #=0-7), BEFORE reading or scanning. To access all available sections, use the command: SSALL

From the FUNCTION: or MAIN SIG MENU level, you may enter the SIG\*ATARI (CO)Inferencing channels by typing: CO (or CB). The system will display a short text prepared by the sysop which may include a schedule of upcoming conferences or other timely information then display your NAME or HANDLE as it will be seen by others and indicate which of the 31 channels are in use. Unlike the CHAT feature of most private BBS's, the CO channels can accommodate dozens of simultaneous users. Conferencing is surprisingly simple once you get the hang of it, as long as you keep a few simple rules in mind.

1 - You may "converse" in lines up to 80 characters long simply by typing your words in from the keyboard, but NOTHING is transmitted to others UNTIL YOU HIT THE ◀RETURN▶ KEY.



58 Since others will be "talking" while you are composing your words, it's **HIGHLY** recommended that you use the **EDIT WINDOW** feature of **HOME-TERM** while in **CO**.

Downloading database or data libraries

Since others will be "talking" while you are composing your words, it's **HIGHLY** recommended that you use the **EDIT WINDOW** feature of **HOMETERM** while in **CO**.

2 - The system will consider every line you type as "conversation" EXCEPT FOR LINES THAT BEGIN WITH A SLASH (/) IN COLUMN ONE. A SLASH IN COLUMN ONE DENOTES A COMMAND TO THE SYSTEM. For example, to see a list of valid **CO** commands, type: **/HELP** while in **CO**. To exit **CO** and return to the **SIG**, type: **/EXIT** (or **CTRL-C**). For a more complete discussion of the **CO** commands, we suggest you read the helpfiles in the **TELECOMMUNICATIONS** data library.

The final (and most popular) feature of **SIG\*ATARI** are the downloading databases (also called **XA's** or data libraries). Like the message sections, the databases are divided by subject, roughly corresponding to message sections. For example, at the time of this writing, Section 2 was named **TELECOMMUNICATIONS**. Thus, any questions to the **SYSOP** about **HOMETERM** would be left in Section 2 of the message area, and any programs and helpfiles relating to terminal software, **BBS's**, etc., would be found in **XA-2** (soon to be called **DL-2**). To enter this database, type: **XA2** (or **DL2**) at the **FUNCTION:** or **MAIN SIG MENU** prompt. The databases include text files and program listings in many forms. Due to limitations in the CompuServe network, and peculiarities of your **ATARI**, some of the programs are stored online in formats that require you to **DOWNLOAD** them with special terminal programs or with specific procedures.

**HOMETERM** will allow you to **DOWNLOAD** or retrieve **MOST** of these files using the **XMODEM** or **CAPTURE BUFFER** protocols. And for those programs that require a special CompuServe protocol, we offer a public domain terminal program online (that you may **DOWNLOAD** with **HOMETERM**) named **TSCOPE**. But more about this in a moment.

As previously noted, this section of **SIG\*ATARI** is being revised as this text was being written. Among the features of the database that are expected to remain, are the powerful searching and browsing commands. When a text-file or program is submitted to the databases, the **UPLOADER** is required to supply a short description of the file and a few meaningful keywords. Other members accessing the database may then view these with the **(S)can** and **(BRO)wse** commands. To see a directory of just filenames, use the **(S)can** command. The **(BRO)wse** command displays each file's description and **KEYWORDS** and gives you the option of reading

the file, downloading it, or continuing to the next entry. The (S)can and (BRO)wse commands support additional parameters or "switches" which permit the more experienced users to search the database files in many ways. For example, to (S)can for all files with the extender .DOC, you could enter the command: S \* .DOC.

Another variation of the BROWse command used in conjunction with the /KEYWORD "switch" might be used to display the descriptions of only those files denoted with the keyword "XMODEM" like: BRO \*/KEY:XMODEM. A complete discussion of all the possible variations and uses of these commands is beyond the scope of this text. Once again, we recommend you read the online documentation for any specific database command, by typing: ? xxx (where xxx = command) or "?" ALL (for help on all commands).

The chief reason for maintaining a program database is to support file transfers. When a program is sent from the host computer (CompuServe) to your ATARI, the process is named DOWNLOADING. When you send a file from your ATARI to the host computer (CompuServe), the process is called UPLOADING. There are many different methods for UPLOADING and DOWNLOADING, but they can be broken down into two basic types of transfer methods, "SMART" and "DUMB" transfers. In both methods, one computer sends a stream of data to the other computer. When this is done via modems over local or long distance phone lines, line "noise" or other factors might affect this data stream, possibly dropping or changing the value of a single data byte. Depending on the nature of the file being transferred, such a "glitch" may be insignificant, or a major problem. In a DUMB transfer, the sending computer simply transmits the data stream and expects the receiving computer to take the responsibility (and possible risk of inaccurate data) for displaying and or storing the incoming characters. This method is usually used for sending text files and is probably 95-99.9% safe.

The (U)pload and (C)apture functions of HOMETERM perform such a DUMB transfer and should be used for sending and receiving files from SIG\*ATARI whenever possible. We'll discuss the exact procedure to do this in a moment. Sometimes, especially when transferring a BINARY FILE where 1 garbled character may prevent a program from running correctly, you MUST insure that every data byte is received accurately. In such cases, the sending computer will transmit a file in pieces or "blocks". The sending system uses an algorithm to calculate a verifying code for a specific block of data. The sending system transmits that block of data and the receiving computer will use the same algorithm or formula to calculate the verifying code.

**When transferring a BINARY FILE you MUST insure that every data byte is received accurately.**

If the codes match, the block is assumed to have been transmitted accurately, and the sender then repeats this process with the next block of data. If the codes do NOT match, the sender will attempt to resend the same block. As you might guess, this second process with all the verification checks takes considerably longer to complete a file transfer, sometimes increasing the transfer time by a factor of 2-4 times longer. Compounding the problem is the fact that there are many different algorithms or protocols used to verify accuracy. Obviously, both ends must be using the same protocol if this process is to work.

The XMODEM protocol is one of the most commonly used protocols in the microcomputer world. It features a verifying algorithm that offers a reasonable compromise between accuracy and speed. The protocol was created by Ward Christensen for use on another computer system but was modified to run on the ATARI a few years ago and is widely used by many ATARI terminal programs, including HOMETERM. It was recently implemented by CompuServe for use in SIG\*ATARI, but a problem cropped up.

When XMODEM was first implemented in a public domain terminal program for the ATARI named AMODEM, the XMODEM specifications were slightly modified to accomodate some unique properties of the ATARI. This "modified" version of XMODEM was incorporated into most of the other ATARI terminal programs and is now used by tens of thousands of ATARIs. As long as both computers use this same "modified" XMODEM, there's no problems. When CompuServe implemented its general version of XMODEM, it naturally followed the original specification, not the modified Atari version.

HOMETERM was written to be 100% compatible with all those ATARIs using the "modified" XMODEM protocol, and ALSO work with CompuServe version of XMODEM.

Russ Wetmore therefore faced a difficult choice when writing HOMETERM; should HOMETERM use the original XMODEM specs and be 100% compatible with CompuServe, or use the "modified" version to be compatible with the tens of thousands of other ATARI's? Fortunately, he made a wise decision and did what seemed impossible. Your version of HOMETERM was written to be 100% compatible with all those ATARIs using the "modified" XMODEM protocol, and hence all the ATARI BBS's, and **ALSO** he included enough of the original XMODEM specs to enable HOMETERM to work with CompuServe's version of XMODEM.

Using HOMETERM, you will be able to DOWNLOAD the vast majority of SIG\*ATARI's programs (85+% ) directly, and for those few others that require a special protocol, SIG\*ATARI has made available online a free terminal program that you can DOWNLOAD with HOMETERM at no additional charge. This program is named TSCOPE.XMO and is available with complete documentation from the TELECOMMUNICATIONS database.

To DOWNLOAD a file FROM SIG\*ATARI to your computer, you must use the Scan or BROWse commands to find the EXACT FILENAME. FIRST - note the 3 letter extension. If the extender is .BIN, the file should **not** be DOWNLOADED with HOMETERM. Use TSCOPE for these files. If the extender is .XMO, use HOMETERM and choose "R" for XMODEM-RECEIVE on HOMETERMs function menu. For any other extender, select "C" for CAPTURE on the HOMETERM menu. When you select "R" or "C" on the HOMETERM menu, you will be prompted for a filename. This is the name you wish to save the file under on your ATARI disk. It does not have to be the same name used on CompuServe. Once HOMETERM is set up, you must tell CompuServe to send you the file. Use the DOW command with the exact filename as: DOW TSCOPE.XMO or DOW SIG-CO.DOC and press ◀RETURN▶. CompuServe will then display 4 choices of transfer protocols:

- 1 - A Protocol
- 2 - B Protocol
- 3 - XMODEM Protocol
- 4 - DC2/DC4 Protocol

HOMETERM only supports selection 3 & 4. Use XMODEM only if the filename uses the extender .XMO. Use DC2/DC4 when using the "C"apture feature of HOMETERM. Currently, A Protocol is used for TSCOPE only, and B Protocol is not supported by any ATARI terminal program, including HOMETERM. If you select XMODEM, you will be asked for a 7 or 8 bit transfer. Select 8 bit for .XMO files. CompuServe will then tell you that XMODEM has started and you should hit your ATARI's ◀START▶ key and sit back. When you select DC2/DC4 (which is CompuServe's fancy name for DUMB transfers), the file will begin to scroll IMMEDIATELY, so be ready to press your ◀START▶ or ◀OPTION▶ key instantly. In fact, most people hit ◀START▶ to open the capture buffer BEFORE hitting ◀RETURN▶ to start CompuServe.

If you are sending a file from your ATARI to CompuServe, the process is almost identical. If your file is all text, or a LISTed BASIC pgm, or source code, use "U"pload with HOMETERM. If your program is a binary file or TOKENIZED BASIC (SAVE'd not LISTed), you should use XMODEM-SEND on HOMETERM. CompuServe only accepts 6 letter filenames and a 3 letter extender. To prepare CompuServe to accept your UPLOAD, use the command: UPL filename.ext

## \*\*\* IMPORTANT \*\*\*

WHEN YOU CHOOSE A FILENAME FOR COMPUERVE, THE EXTENDER IS VERY IMPORTANT!! IF YOU ARE USING XMODEM TO TRANSMIT THE FILE WITH HOMETERM, YOU MUST USE THE EXTENDER ".XMO". YOU SHOULD ALWAYS SELECT 8-BIT TRANSFERS WITH XMODEM. NEVER USE ".BIN" WITH XMODEM. USE HOMETERM'S "U"PLOAD FEATURE FOR ALL TEXT FILES.

When sending files with the "U"pload feature of HOMETERM, choose DC2/DC4 as the protocol. You don't require to be prompted for each line. Also, **never** send a file to CIS via the "U"pload feature if it contains inverse video or special ATASCII characters. Sometimes when CompuServe is very busy, HOMETERM's "U"pload stream will overwhelm the system and send data faster than CIS can accept it. The system literally "chokes". We suggest you set a delay speed of around 500 ms. when using "U"pload to send text to SIG\*ATARI.

That then is a brief outline on how to use the largest Atari oriented "BBS" in North America, SIG\*ATARI on CompuServe. This is a service run by enthusiasts for enthusiasts. From beginners to old-hands, the SIG is open to all. All it requires is an interest in things Atari. See you there!

Ron Luks  
Sysop SIG\*Atari  
October, 1984

For  
**Technical  
Support**  
or  
**Batteries  
Included  
Product  
Information**  
please call

(416)  
**881-9816**

**BATTERIES INCLUDED**

"The Energized Software Company!"

30 Mural Street Richmond Hill Ontario Canada L4B 1B5


A series of 25 horizontal lines for writing, spanning most of the page width.



NOTES





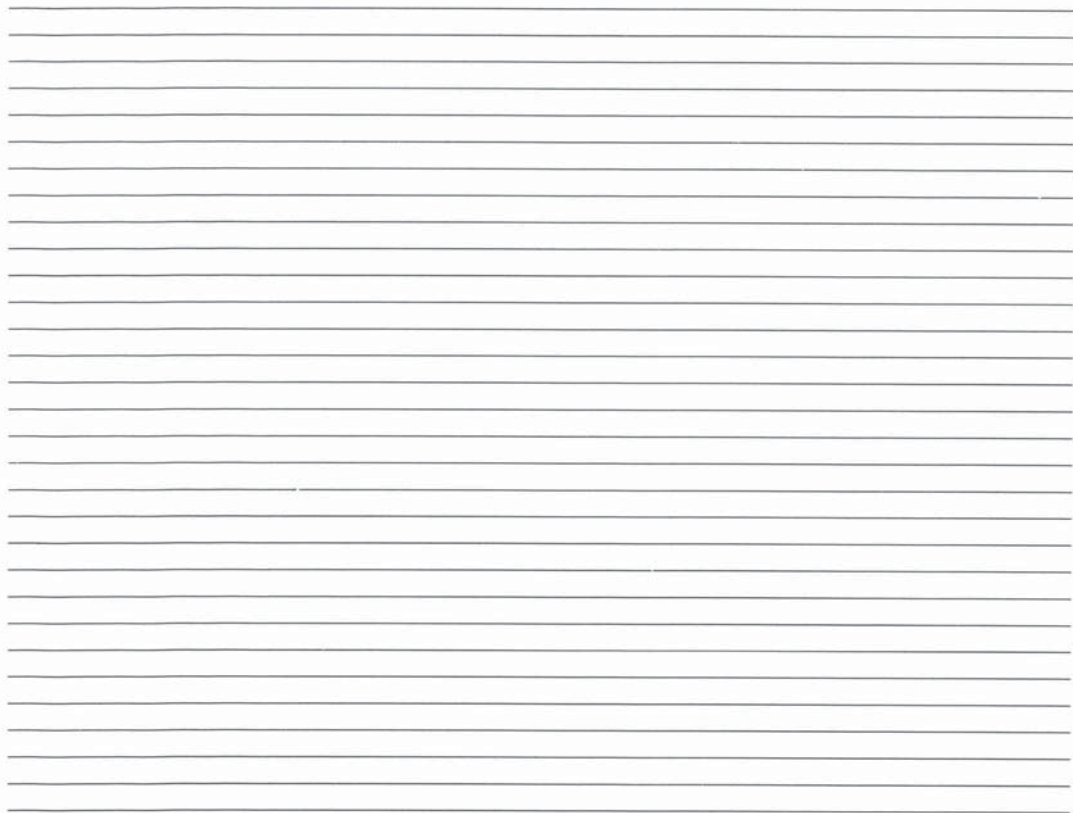

A series of 25 horizontal lines for writing, with a row of punch holes at the top of the page.



BATTERIES INCLUDED



TM

# HomePak

BY RUSS WETMORE

FOR  
ATARI™